TRIMLESS ROUND ADJ FIRE-RATED **5679** SKU 1248006




PRODUCT SPECIFICATION

GENERAL

MAIN MATERIAL: M. DIMENSIONS: H: INSTALLATION ORIENTATION: CG CUT OUT HOLE: 11 RECESS DEPTH: 18 FIRE RATING: 90 LAMP LIGHT SOURCE: GI MAXIMUM WATTAGE: 50 MAXIMUM LAMP LENGTH: 57 LAMP INCLUDED? No		CABLE LENGTH: GROSS WEIGHT: CLASS: IP RATING: BATHROOM ZONE: VOLTAGE: PRODUCT F MARK: MACADAM ELLIPSE: UGR: BEAM ANGLE: TILT ADJUSTMENT ANGLE:	Not Applicable 0.82 (Kg) CE (Class I) IP20 Zone 3 Mains 230 (V) Not Suitable for: Mounting on flammable materials /Covering with thermal insulation Not Applicable Not Applicable Lamp Dependant 30 (Degrees)
DIMENSIONS: H: INSTALLATION ORIENTATION: Ce CUT OUT HOLE: 11 RECESS DEPTH: 18 FIRE RATING: 90 LAMP LIGHT SOURCE: GI MAXIMUM WATTAGE: 50 MAXIMUM LAMP LENGTH: 57 LAMP INCLUDED? NA	H: 162mm DIA: 102mm Ceiling Mount 11mm/4-3/8″ 82 (mm) 10 (min) 5010 0W Max 7 (mm) Io	CLASS: IP RATING: BATHROOM ZONE: VOLTAGE: PRODUCT F MARK: MACADAM ELLIPSE: UGR: BEAM ANGLE:	CE (Class I) IP20 Zone 3 Mains 230 (V) Not Suitable for: Mounting on flammable materials /Covering with thermal insulation Not Applicable Not Applicable Lamp Dependant
INSTALLATION ORIENTATION: Ce CUT OUT HOLE: 11 RECESS DEPTH: 18 FIRE RATING: 90 LAMP LIGHT SOURCE: GI MAXIMUM WATTAGE: 50 MAXIMUM LAMP LENGTH: 57 LAMP INCLUDED? NA	Ceiling Mount 11mm/4-3/8" 82 (mm) 10 (min) 6U10 0W Max 7 (mm) Io	IP RATING: BATHROOM ZONE: VOLTAGE: PRODUCT F MARK: MACADAM ELLIPSE: UGR: BEAM ANGLE:	IP20 Zone 3 Mains 230 (V) Not Suitable for: Mounting on flammable materials /Covering with thermal insulation Not Applicable Lamp Dependant
CUT OUT HOLE: 11 RECESS DEPTH: 18 FIRE RATING: 90 LAMP LIGHT SOURCE: GI MAXIMUM WATTAGE: 50 MAXIMUM LAMP LENGTH: 57 LAMP INCLUDED? No	11mm / 4-3/8" 82 (mm) 10 (min) 6000 6010 0W Max 7 (mm) Jo	BATHROOM ZONE: VOLTAGE: PRODUCT F MARK: MACADAM ELLIPSE: UGR: BEAM ANGLE:	Zone 3 Mains 230 (V) Not Suitable for: Mounting on flammable materials /Covering with thermal insulation Not Applicable Not Applicable Lamp Dependant
RECESS DEPTH: 18 FIRE RATING: 90 LAMP LIGHT SOURCE: GI MAXIMUM WATTAGE: 50 MAXIMUM LAMP LENGTH: 57 LAMP INCLUDED? No	0 (min) 5U10 0W Max 7 (mm) Io	VOLTAGE: PRODUCT F MARK: MACADAM ELLIPSE: UGR: BEAM ANGLE:	Mains 230 (V) Not Suitable for: Mounting on flammable materials /Covering with thermal insulation Not Applicable Not Applicable Lamp Dependant
LIGHT SOURCE: GI MAXIMUM WATTAGE: 50 MAXIMUM LAMP LENGTH: 57 LAMP INCLUDED? NA	GU10 OW Max 7 (mm) Io	MACADAM ELLIPSE: UGR: BEAM ANGLE:	Not Suitable for: Mounting on flammable materials /Covering with thermal insulation Not Applicable Not Applicable Lamp Dependant
LIGHT SOURCE: GI MAXIMUM WATTAGE: 50 MAXIMUM LAMP LENGTH: 57 LAMP INCLUDED? No	0W Max 7 (mm) Io	UGR: BEAM ANGLE:	Not Applicable Lamp Dependant
MAXIMUM WATTAGE: 50 MAXIMUM LAMP LENGTH: 57 LAMP INCLUDED? No	0W Max 7 (mm) Io	UGR: BEAM ANGLE:	Not Applicable Lamp Dependant
MAXIMUM LAMP LENGTH: 57 LAMP INCLUDED? No	7 (mm) Io	BEAM ANGLE:	Lamp Dependant
LAMP INCLUDED?	lo		
	amp Dependant	ROTATION ADJUSTMENT ANGLE:	360 (Degrees)
COLOUR TEMP: La	amp Dependant	AVERAGE LIFESPAN:	Lamp Dependant
	amp Dependant	L70:	Not Applicable
R9: Lo	amp Dependant		
ELECTRICAL			
SWITCHED: No	10	SUPPLY FREQUENCY:	Not Applicable
DIMMABLE: Ye	es	DRIVER/BALLAST VOLTAGE:	Not Applicable
DIMMING METHOD: La	amp Dependant	DRIVER AVERAGE LIFESPAN:	Not Applicable
DRIVER OUTPUT CURRENT: No	lot Applicable	EFFICACY:	Lamp Dependant
DRIVER OUTPUT VOLTAGE: No	lot Applicable	DRIVER/BALLAST INCLUDED?	Not Applicable



BOX QUANTITY x 12

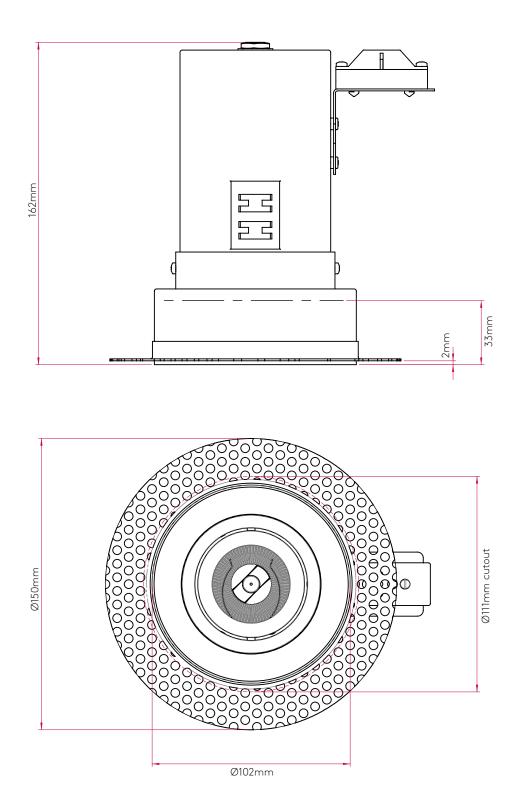

sales@astrolighting.com