





Uplights | 1 x powerLED 2,0 W 630 mA | CRI 80  
**93132W08**



Technical data	
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Optics	Narrow Spot
Power	2 W
Luminous flux (source)	233 lm
Current intensity	630mA
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Energy class	A++
Safety class	3
IP	IP67
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-20°C / +50°C
Driver included	No
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes

Finishing casing	
Material	Brass
Colour	chrome
Processing	Electroplating

Electronics		
	On/Off Driver 180~300V AC	99186
	On/Off Driver 190~250V AC / 260~360V DC	89420
	On/Off Driver 180~300V AC	99179



Uplights | 1 x powerLED 2,0 W 630 mA | CRI 80  
**93132W08**

Single emission uplights for outdoor application. The warm white LED light source with a narrow spot light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 233 lm, with a 116.5 lm/W nominal luminous efficacy.

The device body is made of brass and features a chrome finish, processed by means of electroplating. The ingress protection degree is IP67; the total weight is of 0.180 kg. The power supply driver is not provided and is to be ordered separately.



The total absorbed power is 2,0 W. The power supply cable is included and features.

The device features protection class III and can be floor-mounted with an outer casing, code 84918(for concrete or masonry).

Illuminotechnical Features	
Light Output Ratio (LOR)	83 %
Luminous flux (source)	233 lm
Luminaire luminous flux	194 lm
Consumption	2,0 W
Luminaire efficacy	97 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	> 28
UGR axial	> 28

OPTICAL	
Light distribution simmetry	Symmetrical 2
Ottica C0/C180	9°
Ottica C90/C270	12°

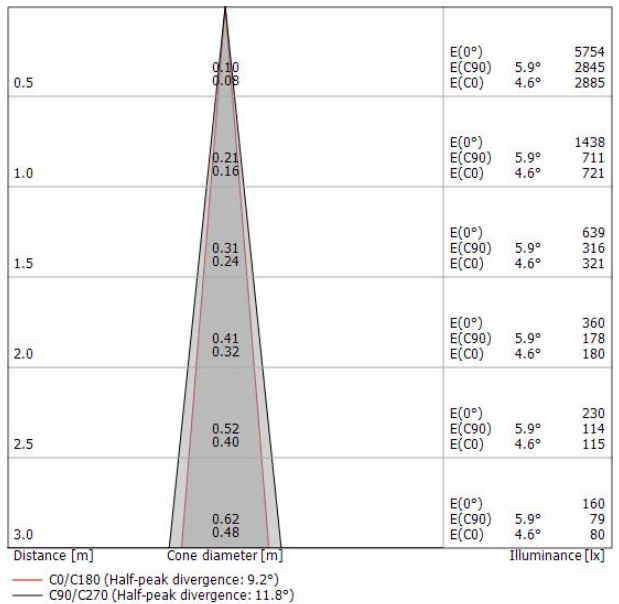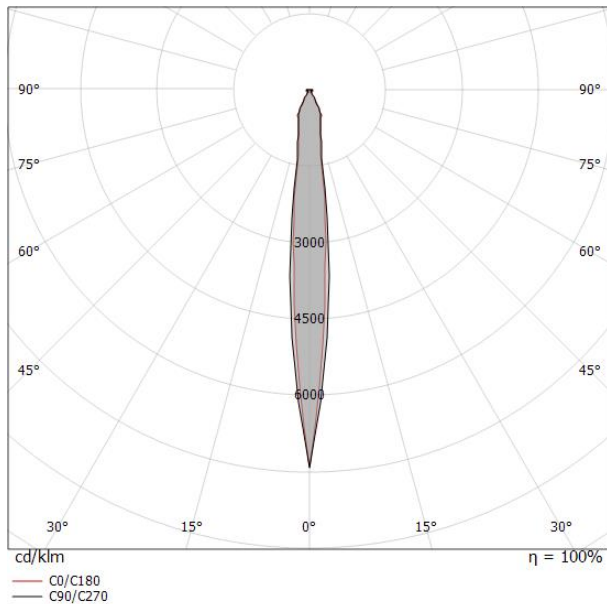



Beret\_2Q | Uplights | Accessories  
**93132W08**



Outer casing  
L=87mm, H=60mm, D=60mm

**Code**  
84918