

WIREFLOW

Design by Arik Levy.

VIBIA
LIGHT IS CREATION

Reference

0345.

Application

Hanging lamps

Installation type

Surface

Description

Wireflow designed by Arik Levy. Hanging lap. The elegant structure of fine cables and LED terminal by Wireflow allows the combination of multiple individual pieces to carry out major graphic lighting installations which generate a visual opportunity of lines and points of light and bring a markedly conceptual character to an intangible product. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements. The electrical connection point can be positioned on the ceiling or wall

Diffuser

Pressed-glass diffuser

Materials

Diffuser: Glass

Body: Aluminum

Ceiling rose: Steel


Rods: Steel

Finish



0345-04 Black lacquer (RAL 9005)

Sketch



Electrical characteristics

1 x LED 4,5W 350mA

Total 4.5 W



Led 2700K CRI >80 490 lm 109 lm/W

Fixture: 197 lm 60 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming 1-10V PUSH

ficha.fichatecnicaproducto.regulacion.opcional DALI or SMART

Physical characteristics

1 Box / 0.25 x 0.42 x 0.42 m. / Vol. 0.0441 m³ /

Gross weight 2.6 kg. / Net weight 2.3 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 40.10%

Coordinate system : CG

Total flux : 490.30

Maximum value : 53.76


Light position : C=15.00 G=55.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

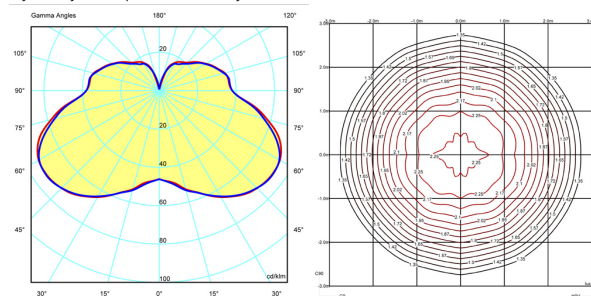

Certificates

