

PLUS

Design by X. Claramunt and M. de Mas.

VIBIA
LIGHT IS CREATION

Reference

0626.

Application

Ceiling Lamps

Installation type

Surface

Description

Symmetrical ceiling light, designed by X. Claramunt and M. de Mas. Direct, diffuse and uniform light distribution. Convex methacrylate diffuser and matt white lacquer finish, though the whole fixture can be painted in the desired colour to make it blend perfectly into the ceiling. Its form recalls a real skylight.

Diffuser

Methacrylate diffuser

Materials


Body: Polyurethane foam
Diffuser: Methacrylate

Finish



0626-03 Matt white lacquer (RAL 9010)

Sketch



Electrical characteristics

4 x G5 230V 24W (T5)

Total 96.0 W

A



Fixture: 1971 lm 21 lm/W

Driver included: CV - Contant Voltage 230V 50Hz

Electronic dimming DALI PUSH

Technical characteristics

- Easy-to-install and replace bulb system

Physical characteristics

1 Box / 0.27 x 0.96 x 0.96 m. / Vol. 0.2488 m³ /
Gross weight 14.9 kg. / Net weight 13.4 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 28.62%

Coordinate system : CG

Total flux : 7000.00 lm

Maximum value : 96.08 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

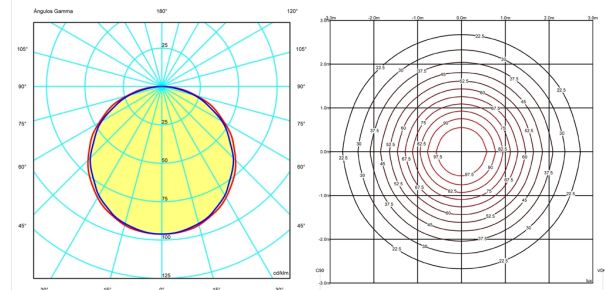

Certificates

