


Tablet_W1



Wall Lights | 220-240 V | topLED 19 W 700 mA | CRI 90
7601



Technical data	
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	upward
Power	19 W
Luminous flux (source)	2204 lm
Frequency	50 - 60 Hz
CCT / Tonalità	3000 K
Colour rendering index	90 Ra
AC / DC	AC
Safety class	1
IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	Yes
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	1.048 Kg

Finishing casing	
Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating

Finishing diffuser	
Material	PC
Processing	Sandblasting



Wall Lights | 220-240 V | topLED 19 W 700 mA | CRI 90
7601

Single emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 48 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2204 lm, with a 116.0 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of PC with a sandblasting treatment. The ingress protection degree is IP40; the total weight is of 1.048 kg. The power supply driver is included in the delivery.


The total absorbed power is 19 W.

The device features protection class I and can be wall lights-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	53 %
Luminous flux (source)	2204 lm
Luminaire luminous flux	1169 lm
Consumption	15 W
Luminaire efficacy	77 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Life / Failure ratio	L80C0B20

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 25
UGR axial	< 22

OPTICAL	
Light distribution simmetry	Symmetrical
Optica C0/C180	98°

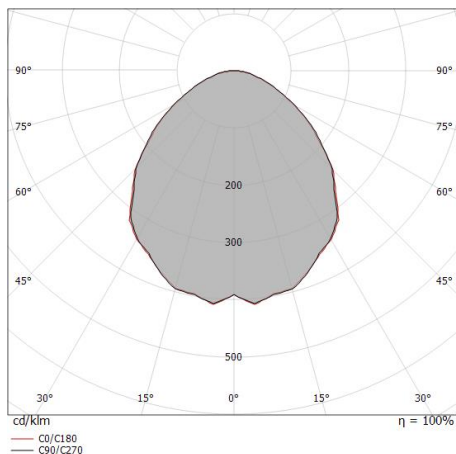

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.17 1.15	E(0°) 1829 E(C90) 264 E(C0) 272
1.0	2.33 2.30	E(0°) 457 E(C90) 66 E(C0) 68
1.5	3.50 3.45	E(0°) 203 E(C90) 29 E(C0) 30
2.0	4.67 4.60	E(0°) 114 E(C90) 17 E(C0) 17
2.5	5.83 5.75	E(0°) 73 E(C90) 11 E(C0) 11
3.0	7.00 6.90	E(0°) 51 E(C90) 7 E(C0) 8

— C0/C180 (Half-peak divergence: 98.0°)
— C90/C270 (Half-peak divergence: 98.8°)



Tablet_W1 | Wall Lights | Accessories

7601



Bracket

L=239mm, H=5mm, D=50mm

Code

kit 81