
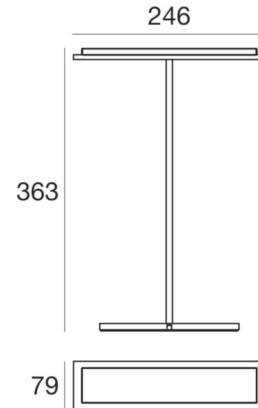




Table Lamps | 220-240 V | topLED 7 W 350 mA | CRI 90  
7495

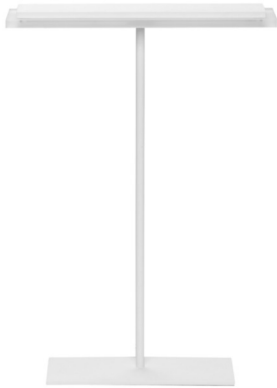

Technical data	
Designer	Linea Light
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	7 W
Luminous flux (source)	835 lm
Frequency	60 - 50 Hz
CCT / Tonaltà	3000 K
Colour rendering index	90 Ra
Safety class	2
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2,80 m
Electric socket	Type C
Resin potting	No
Net weight	1.24 Kg

Finishing diffuser	
Material	PMMA
Colour	white
Processing	Satin finishing

Finishing mounting frame	
Material	Iron
Colour	embossed white RAL 9003
Processing	Coating

## Table Lamps | 220-240 V | topLED 7 W 350 mA | CRI 90 7495

Single emission table lamps for indoor application. The warm white LED light source with a general lighting light distribution is composed of 24 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 835 lm, with a 119.3 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 1.24 kg. The power supply driver is included in the delivery.


The total absorbed power is 7 W. The power supply cable is included and features.

The device features protection class II and can be floor-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	61 %
Luminous flux (source)	835 lm
Luminaire luminous flux	515 lm
Consumption	7 W
Luminaire efficacy	73 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Life / Failure ratio	L80C0B20

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 22
UGR axial	< 19

OPTICAL	
Light distribution simmetry	Symmetrical 2
Optica C0/C180	99°
Optica C90/C270	102°

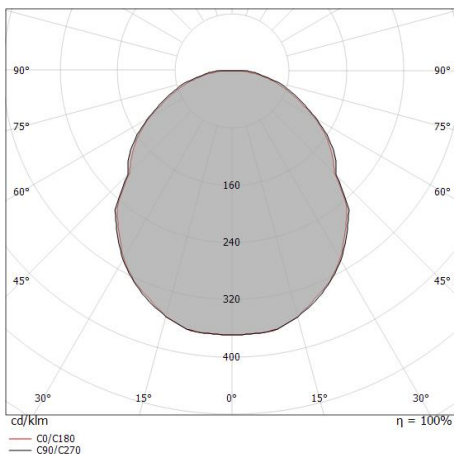

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	1.23 1.16	761	96	106
1.0	2.45 2.33	190	24	26
1.5	3.68 3.49	85	11	12
2.0	4.90 4.65	48	6	7
2.5	6.13 5.81	30	4	4
3.0	7.36 6.98	21	3	3

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0/C180 (Half-peak divergence: 98.6°)  
— C90/C270 (Half-peak divergence: 101.6°)