




Ceiling Lights | 220-240 V | topLED 7 W 220-240 V AC | CRI 90  
8236N



Technical data	
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	7 W
Luminous flux (source)	811 lm
Frequency	50 - 60 Hz
CCT / Tonaltà	4000 K
Colour rendering index	90 Ra
AC / DC	AC-DC
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	0.480 Kg

Finishing diffuser	
Material	PMMA
Processing	Satin finishing

Finishing mounting frame	
Material	Iron
Colour	embossed white RAL 9003
Processing	Coating

Ceiling Lights | 220-240 V | topLED 7 W 220-240 V AC | CRI 90  
**8236N**

Single emission ceiling lights for indoor application. The natural white LED light source with a general lighting light distribution is composed of 24 topped LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 811 lm, with a 115.9 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 0.480 kg. The power supply driver is included in the delivery.


The total absorbed power is 7 W.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	78 %
Luminous flux (source)	811 lm
Luminaire luminous flux	635 lm
Consumption	7 W
Luminaire efficacy	90 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Life / Failure ratio	L70C0B20 72.5H

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 28
UGR axial	< 28

OPTICAL	
Light distribution simmetry	Symmetrical
Optica C0/C180	112°

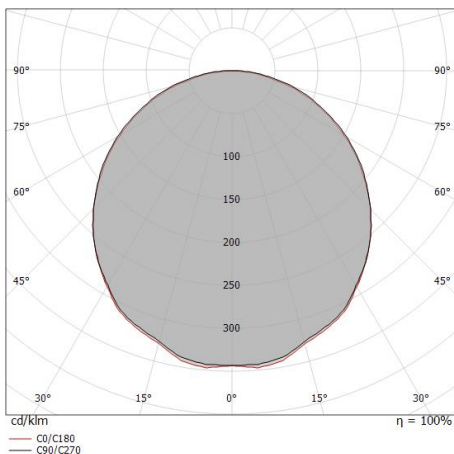

Distance [m]	Cone diameter [m]	Illuminance [lx]	E(0°)	E(C90)	E(C0)
0.5	1.52 1.47	872 73 78	56.6°	55.8°	
1.0	3.03 2.94	218 18 20	56.6°	55.8°	
1.5	4.55 4.41	97 8 9	56.6°	55.8°	
2.0	6.07 5.88	54 5 5	56.6°	55.8°	
2.5	7.58 7.36	35 3 3	56.6°	55.8°	
3.0	9.10 8.83	24 2 2	56.6°	55.8°	

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0/C180 (Half-peak divergence: 111.6°)  
 - - C90/C270 (Half-peak divergence: 113.2°)



Box\_SR | Ceiling Lights | Accessories  
**8236N**



Dimmer  
PUSH DIM, 220-240V

**Code**  
KIT0026