




Pendant Luminaires | 220-240 V | 4 x powerLED 28 W 440 mA | CRI 80
8791

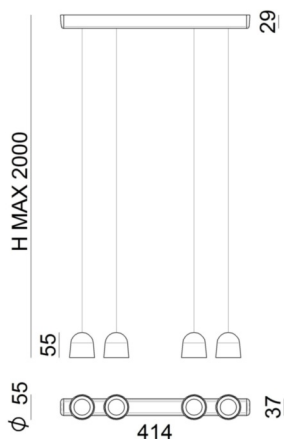

Technical data

Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Optics	Spot
Light emission direction	downward
Power	28 W
Luminous flux (source)	3744 lm
Frequency	50-60 Hz
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Driver
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	Orientabile
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing

Materiale lega	Aluminium
Colour	gold
Processing	Coating

Finishing diffuser

Materiale lega	PMMA
Processing	Satin finishing

Finishing mounting frame

Materiale lega	Aluminium
Colour	embossed white RAL 9003
Processing	Coating



Pendant Luminaires | 220-240 V | 4 x powerLED 28 W 440 mA | CRI 80
8791

Single emission pendant luminaires for indoor application. The warm white LED light source with a spot light distribution is composed of 4 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 3744 lm, with a 133.7 lm/W nominal luminous efficacy and an operating lifetime (L80) of 72.6000 hours.

The device body is made of aluminium and features a gold finish, processed by means of coating; the diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of aluminium, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40;

The total absorbed power is 28 W.

The device features protection class I and can be wall lights or ceiling-mounted.

Illuminotechnical Features	
Luminous flux (source)	3744 lm
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Life / Failure Ratio	
L80 B0 C0 72.6h	