




Pendant Luminaires | 220-240 V | 1xE27  
8384

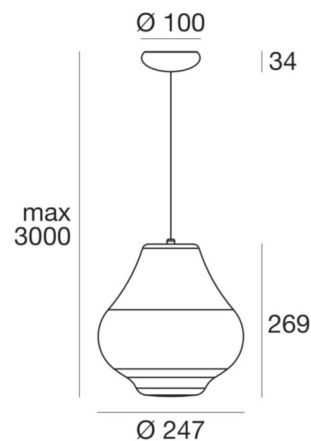

Technical data	
Installation position	Ceiling
Installation environment	Indoor
Lamp cap	1 x E27 Max 46W
Frequency	50-60 Hz
Optics	General Lighting
Light emission direction	downward
Safety class	1
IP	IP20
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission

Finishing diffuser	
Material	PE
Colour	neutral



Pendant Luminaires | 220-240 V | 1xE27  
**8384**

Double emission pendant luminaires for indoor application. Compatibility:  
 LED lamp, compact fluo 30 W, halogen 46 W; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of aluminium,  
 processed by means of electroplating. The ingress protection degree is  
 IP20;

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	100 %
Luminous flux (source)	700 lm
Luminaire luminous flux	638 lm
Consumption	11 W
Luminaire efficacy	58 lm/W
Colour temperature	2500 K
Colour rendering index	100 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Symmetrical
Ottica C0/C180	180°

