


# Ribbon Plus Hi-Flux



LED Strip | stripLED 63 W 24 V | CRI 85  
98638

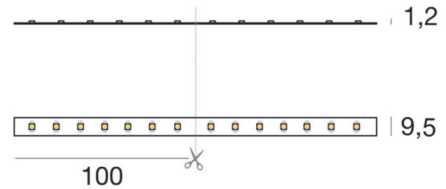

## Technical data

Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward and upward
Power	63 W
Luminous flux (source)	7745 lm
Tensione	24V
CCT / Tonalità	2700 K
Colour rendering index	85 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP20
Glow wire test	No
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Operating temperature	-20°C / +50°C
Driver included	No
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.3 (F) m
Resin potting	No
Type of light emission	Single emission
Net weight	0,125 Kg
Electrostatic discharge protection	No
Surge protection	No

## Electronics



99331  
On/Off Driver 190~250V AC 150 W



84700  
Switching Driver 88~264V AC / 125~373V DC 75 W

## Cavi Elettrificazione

Max cable length	300 mm
Connettore cavo	Femmina



LED Strip | stripLED 63 W 24 V | CRI 85

**98638**

Single emission led strip for indoor application. The warm white LED light source with a general lighting light distribution is composed of 1 stripled LEDs with CCT of 2700 K and a CRI 85; the source luminous flux is 7745 lm, with a 122.9 lm/W nominal luminous efficacy and an operating lifetime (L70) of 50000 hours.

The ingress protection degree is IP20; the total weight is of 0,125 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 63 W. The power supply cable is included and features.

The device features protection class III and can be wall lights or ceiling-mounted.

## Components

	Low Surface Profile - LED Strip	<b>Code</b> <u>98891</u>
	High Surface Profile	<b>Code</b> <u>98893</u>
	Surface profile - LED Strip	<b>Code</b> <u>98923</u>
	High Round Surface Profile	<b>Code</b> <u>98933</u>
	Square Surface Profile	<b>Code</b> <u>98929</u>
	Corner Surface Profile	<b>Code</b> <u>98903</u>



Multiple socket

**Code**  
89119



Cable and connector  
Length 300 mm; insulation singolo; section 0,35 mm<sup>2</sup>; cable gland: no; colors: nero - rosso.

**Code**  
89121



Cable and connector  
Length 1000 mm; insulation singolo; section 0,35 mm<sup>2</sup>; cable gland: no; colors: nero - rosso.

**Code**  
89123




Cable and connector  
Length 3000 mm; insulation singolo; section 0,35 mm<sup>2</sup>; cable gland: no; colors: nero - rosso.

**Code**  
89125



Cable and connector - fast connector extension

**Code**  
98384




Cable and connector - LED Strip fast connector extension

**Code**  
98379




Connector - Fast connector

**Code**  
98383




Diffuser

**Code**  
98941




Diffuser

**Code**  
98942



Diffuser - Opaline Diffuser

**Code**  
98943



Diffuser

**Code**  
98930



Diffuser

**Code**  
98898

Diffuser

**Code**  
98899


Diffuser

**Code**  
98900



Diffuser

**Code**  
98917



Diffuser

**Code**  
98938



Power supply - Power repeater

**Code**  
99540




Remote RF - Dimming RF controller

**Code**  
99697



Remote RF - Dimmer controller

**Code**  
99700



Dimmer - White smart controller  
Radio-frequenza

**Code**  
99694