



BOOK OF DARLINGS 2019

OUR DARLINGS
CAN'T SHINE
WITH*out*
DARK NESS

WE ALL
LOVE THE
DARK



A man with grey hair, wearing a white t-shirt under a dark vest, is DJing at a booth. He has his right arm raised, pointing towards a set of red stage lights. The background is dark with several rows of red spotlights. The overall mood is energetic and professional.

Welcome to my dream world, DARK lover.
The past few years have been an amazing journey,
from thrilling projects to meeting exciting individuals.
We have won 81 international design awards and
we now export to 43 countries worldwide.
And all of this has been made possible through a magic
mix of believers, hard work and a burning passion for
beauty, materials and people.
By being DARK, I hope to inspire you to be
creative in your future projects.
I hope our paths will cross soon.
Over a drink and some big or small talk.
VIVA DESIGN!

MARNICK SMESSAERT
Founder



81 international design awards # 37452 followers on facebook





More than 7000 project shots on www.pinterest.com/pindark



SHOW ME THE DARLINGS

SUSPENSION



12-25
page 129



APOLLO
page 146



AUSUM
page 152



BABY BUBBLE
page 156



BALLZZZ
page 158



BANGSTER
page 168



BOKY
page 170



BRIDGE
page 173



CAPITANO
page 176



CAPTAIN CORK
page 178




COOLCAT
page 182



COOLFIN
page 186



CUP CAKE
page 198



d-CONCRETE
page 204



d-COW
page 206



d-LEATHER
page 208



d-RABBIT
page 210



D2V2
page 212




EDGAR
page 218



FRANJE
page 224



HUITI
page 228



ICE
page 234



IJ-LAMP
page 236



LA CAGE - LA CAGE diva
LA CAGE grossa
page 240



LGTM
page 248



METROLINE
page 256

**PROFILE
SYSTEM**
page 263




MR. BEAM
page 270



NINZA
page 276



NO COPY
page 280



NO FRUIT
page 282



OBLIVION
page 284



ORGUE
page 286



PETROL
page 292



POC
page 294




ROND-L
page 296



SANGHA
page 300



SOYUZ
page 306



SPACEWALKER
page 308



SPAZE
page 312

**PROFILE
SYSTEM**
page 320



SPINE
page 324




T&T
page 326



TUKI
page 332




TWERKIT
page 342



YOKOZUNA
page 354

CEILING



12-25
page 133



ANGLE BEAM
page 143



ATSJI
page 148



ATSJOEM
page 150



AUSUM
page 155



COOLCAT
page 184



COOLFIN
page 191



CUP CAKE
page 201



DROPZ
page 216



EDGAR
page 220



FOREVER 27
page 222



HUITI
page 230



METROBOX
page 250



METROFFICE
page 252



METROLINE
page 260

**PROFILE
SYSTEM**
page 263



NINZA
page 276



PAINT-IT
page 288



PAROQ
page 290



ROND-L
page 296



SKYLINE
page 304



SPAZE
page 316

**PROFILE
SYSTEM**
page 320



TIKI
page 328



TUKI
page 334



ZNOW
page 356

TRACK



12-25
page 137



COOLFIN
page 197



TIKI
page 331



TUKI
page 338



TWIXI
page 346

WALL



12-25
page 133



AGUJA
page 141



BRIDGE
page 175



DING
page 214



GASTON
page 226



IJ-LAMP
page 239



KAVE00
page 240



L-HOP
page 246



ORGUE
page 287



PAINT-IT
page xx



PAROQ
page 290



PETROL
page 293




ROND-L
page xx



SKYLINE
page xx



TUKI
page 337



TWERKIT
page 344



WALLSTER
page 348



WALLSTER JR.
page 352

FLOOR



D2V2
page 213



FRANJE
page 225



HOEK
page 232



SPACEWALKER
page 310







































D-LEATHER



D-RABBIT & FRANJE













ROND-L
Upstairs Hotel
Alq















12-25 - METROLINE - METROBOX - TUKI
Darc magazine HQ



METROFFICE





METROFFICE
Multifisk accountancy
S&D concepts













THE BABY BUBBLE
Souvenir















AGUJA




TWERKIT
Barr
Dries Vanlerberghe



EDGAR



COOLFIN

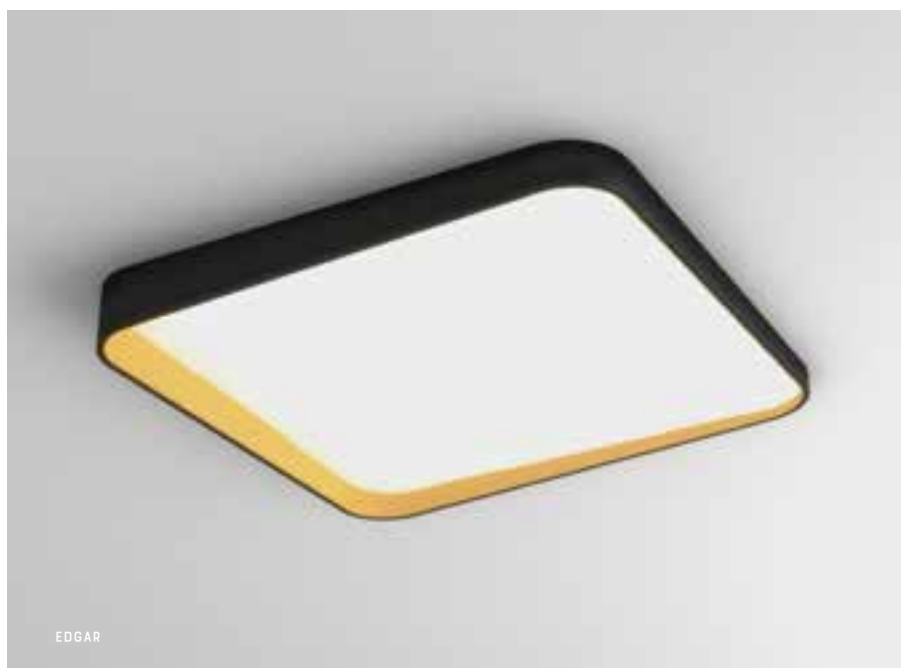

EDGAR



COOLCAT

























ROND-L
La Cloche
Detail Concept











MR.BEAM
Buroproject









MR. BEAM
MeetDistrict
Anthony Boelaert





ZNOW - ANGLE BEAM - NINZA - TUKI
MeetDistrict
Anthony Baeloert



 MeetDistrict



WALLSTER



WALLSTER
Meet District
Anthony Boelen





TUKI
The Jone table
Dark studio
photo © Piet Albert Goethals







BANGSTER
Die Lichtgestalter
Archicult
photo@becker-medien





HOEK - CUSTOM MADE DESKLAMP
Bib Waregem
Goedefroo-Goedefroo





SANGHA
Private residence




















If you have a bad day
remember that
tomorrow is a
wonderful gift and a
new chance to try again.





TWERKIT

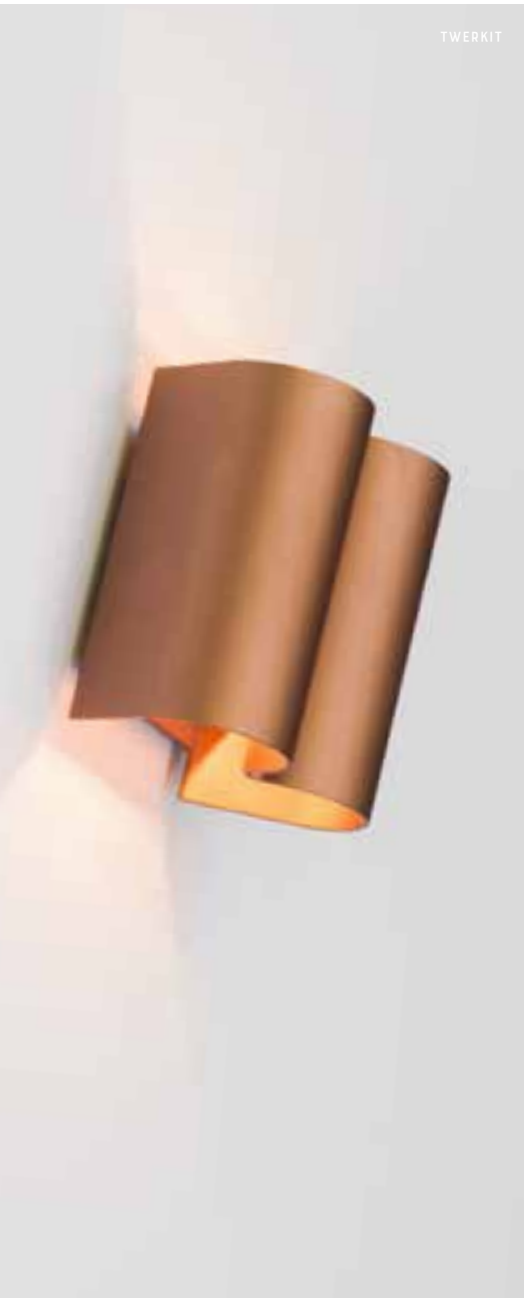

12-25
Copperhead - Jet import

















LA CAGE
Netas H0 İstanbul



LA CAGE



L-HOP 1



L-HOP 2





THE BABY BUBBLE - COOLFIN
Architectenbureau AAMM
photo © De Vroede





THE BABY BUBBLE



DROPZ



THE BIG BUBBLE
BMW Loft 7
Dark studio





APOLLO - ZNOW - NINZA - AUSUM
What the firms
Kros Architecten



ICE
Muvotex - DMA office
















reddot design award
winner 2003




Designpreis der
Bundesrepublik
Deutschland
Nominiert 2004

12-25
design co twee for dark

12-25 S

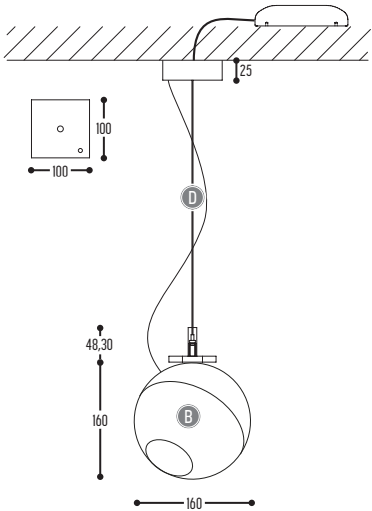


402-BB(B)-CCC-DD
402-BB(B)-EFFGGH-DD-K




12-25 S2

FRONTPLATE CUT OUT
108 x 68 mm

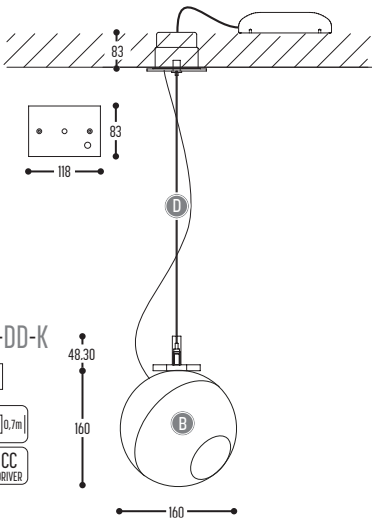

404-BB(B)-CCC-DD
404-BB(B)-EFFGGH-DD-K




BB(B)				CCC							DD						
COLORS				TYPE							SUSP. CABLE						
MATT	02		Black		100	G53		QR-LP111 (MAX 45 W) incl. transfo				01	1,5 m				
	03		White		101			QR-LP111 (MAX 45 W) excl. transfo				02	2,5 m				
	100		Chocolat														
	101		Soft Pink		060	E27		LED QPAR20 (MAX 20 W)									
	102		Soft Yellow		065	GU10			LED QPAR51 (MAX 7,5 W)								
	103		Soft Blue														
	104		Soft Green														
	105		Cream														
	106		Blue	EFF				GG		H		DD	K				
	107		Yellow	CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		SUSP. CABLE	DRIVER EXTERN				
	108		Green														
	109		Red	LED	813	>80 CRI • 1300 Lm / 700 mA / 9,5 W				20	20°	2	2700 K		01	1,5 m	0
GLOSSY*	30		Silver Chrome		907	>95 CRI • 1300 Lm / 700 mA / 13,3 W				40	40°	3	3000 K	02	2,5 m	1	excl.
	31		Gold Chrome						60	60°	4	4000 K			2	Dim 1-10 V	
	69		Copper Glossy													3	Dali
	202		Black Glossy														
	203		White Glossy														
		on request															




*lampbase is standard matt black for all spheres; matt white for white spheres.

12-25 CLUB 3

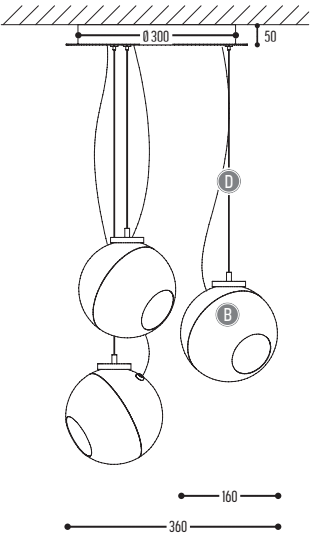


Ceiling base standard matt white
on request other colors possible

455-BB(B)-CCC-DD
455-BB(B)-EFFGGH-DD-K




12-25 CLUB 5

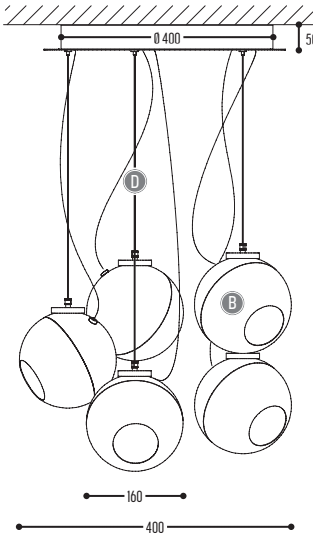

Ceiling base standard matt white
on request other colors possible

456-BB(B)-CCC-DD
456-BB(B)-EFFGGH-DD-K





BB(B)				CCC						DD							
COLORS				TYPE						SUSP. CABLE							
MATT	02		Black		100	G53		QR-LP111 (MAX 45 W) incl. transfo				01	1,5 m				
	03		White									02	2,5 m				
	100		Chocolat														
	101		Soft Pink		060	E27		LED QPAR20 (MAX 20 W)									
	102		Soft Yellow														
	103		Soft Blue														
	104		Soft Green														
	105		Cream														
	106		Blue	EFF				GG		H		DD		K			
	107		Yellow	CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		SUSP. CABLE		DRIVER			
	108		Green														
	109		Red	LED	813	>80 CRI • 1300 Lm / 700 mA / 9,5 W				20	20°	2	2700 K	01	1,5 m	0	incl./non dim
30		Silver Chrome	907		>95 CRI • 1300 Lm / 700 mA / 13,3 W				40	40°	3	3000 K	02	2,5 m	1	excl.	
31		Gold Chrome					60	60°	4	4000 K			2	Dim 1-10 V			
GLOSSY	69		Copper Glossy														
	202		Black Glossy														
	203		White Glossy														
	 on request																



12-25 4P



444-BB(B)-CCC-01
444-BB(B)-EFFGGH-01-K

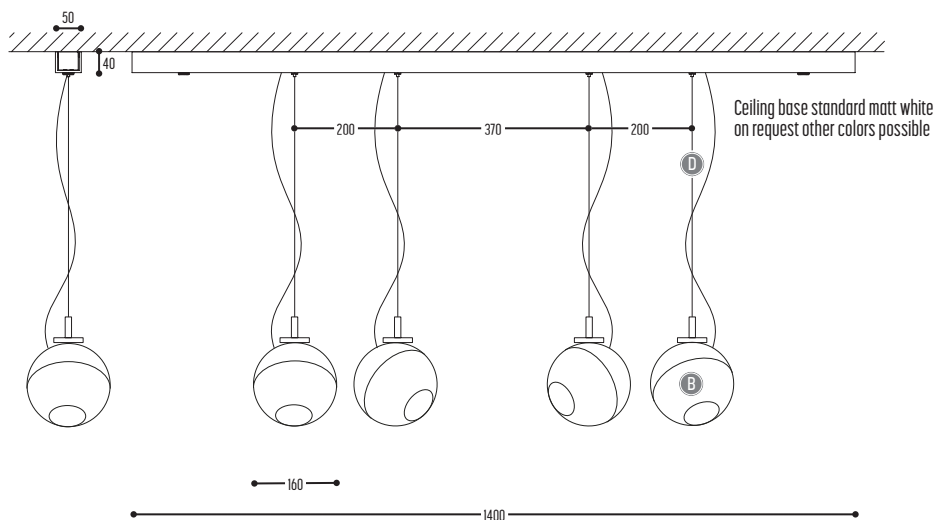

BB(B)				CCC						DD								
COLORS				TYPE						SUSP. CABLE								
MATT	02		Black	 12 V	100	G53		QR-LP111 (MAX 45 W) incl. transfo				01	1,5 m					
	03		White															
	100		Chocolat															
	101		Soft Pink	 230 V	060	E27		LED QPAR20 (MAX 20 W)										
	102		Soft Yellow															
	103		Soft Blue															
	104		Soft Green															
	105		Cream															
	106		Blue	EFF			GG		H		DD					K		
	107		Yellow	CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		SUSP. CABLE					DRIVER		
	108		Green															
	109		Red	LED	813	>80 CRI • 1300 Lm / 700 mA / 9,5 W			20	20°	2					2700 K	01	1,5 m
30		Silver Chrome	907		>95 CRI • 1300 Lm / 700 mA / 13,3 W			40	40°	3	3000 K	2	Dim 1-10 V					
31		Gold Chrome				60	60°	4	4000 K	3	Dali							
69		Copper Glossy																
202		Black Glossy																
GLOSSY	203		White Glossy															
	 on request																	





on request



12-25 BASIC


401-BB(B)-CCC-00
401-BB(B)-EFFGGH-00-K

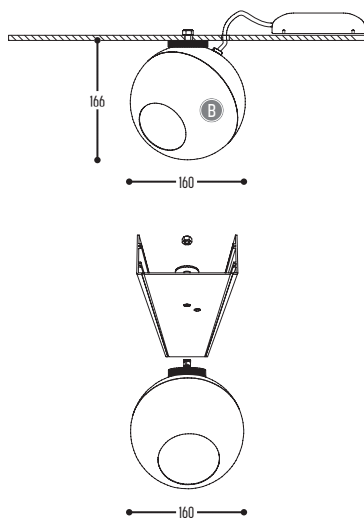

BB(B)				CCC																			
COLORS				TYPE																			
MATT	02		Black		100	G53		QR-LP111 (MAX 45 W) incl. transfo															
	03		White		101			QR-LP111 (MAX 45 W) excl. transfo															
	100		Chocolat																				
	101		Soft Pink		060	E27		LED QPAR20 (MAX 20 W)															
	102		Soft Yellow																				
	103		Soft Blue		065	GU10		LED QPAR51 (MAX 7,5 W)															
	104		Soft Green																				
	105		Cream																				
	106		Blue	EFF				GG		H		K											
	107		Yellow	CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		DRIVER EXTERN											
	108		Green																				
	109		Red	LED	813	>80 CRI • 1300 Lm / 700 mA / 9,5 W			20	20°	2	2700 K	0	incl./non dim									
30		Silver Chrome	907		>95 CRI • 1300 Lm / 700 mA / 13,3 W			40	40°	3	3000 K	1	excl.										
31		Gold Chrome						60	60°	4	4000 K	2	Dim 1-10 V										
GLOSSY	69		Copper Glossy											3	Dali								
	202		Black Glossy																				
	203		White Glossy																				
		RAL-colors	on request																				



12-25 BOX1




403-BB(B)-CCC-00
403-BB(B)-EFFGGH-00-K

Metal



12-25 BOX2

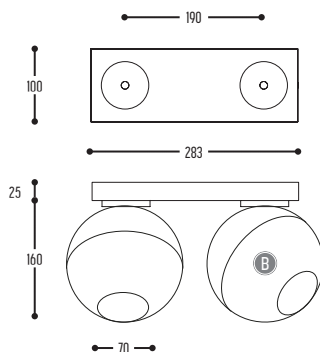


421-BB(B)-CCC-00
421-BB(B)-EFFGGH-00-K

Metal



12-25 BOX3

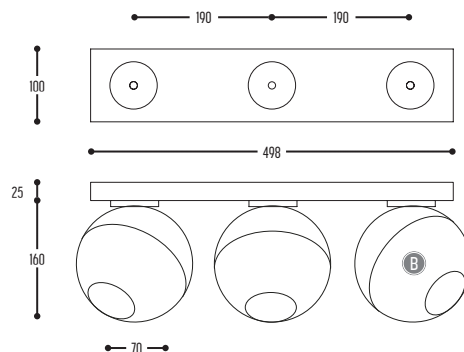

431-BB(B)-CCC-00
431-BB(B)-EFFGGH-00-K


Metal



BB(B)				CCC									
COLORS				TYPE									
MATT	02		Black		100	G53		QR-LP111 (MAX 45 W) incl. transfo					
	03		White		101			QR-LP111 (MAX 45 W) excl. transfo					
	100		Chocolat										
	101		Soft Pink		060	E27		LED QPAR20 (MAX 20 W)					
	102		Soft Yellow		065	GU10		LED QPAR51 (MAX 7,5 W)					
	103		Soft Blue										
	104		Soft Green										
	105		Cream										
	106		Blue	EFF				GG		H		K	
	107		Yellow	CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		DRIVER EXTERN	
108		Green											
109		Red	LED	813	>80 CRI • 1300 Lm / 700 mA / 9,5 W		20	20°	2	2700 K	0	incl./non dim	
30		Silver Chrome		907	>95 CRI • 1300 Lm / 700 mA / 13,3 W		40	40°	3	3000 K	1	excl.	
31		Gold Chrome				60	60°	4	4000 K	2	Dim 1-10 V		
69		Copper Glossy											
202		Black Glossy											
GLOSSY	203		White Glossy										
	 on request												



12-25 SET1


FRONTPLATE CUT OUT
108 x 62 mm

400-BB(B)-CCC-00
400-BB(B)-EFFGGH-00-K

Metal



12-25 SET2


FRONTPLATE CUT OUT
180 x 68 mm

420-BB(B)-CCC-00
420-BB(B)-EFFGGH-00-K

Metal



12-25 SET3

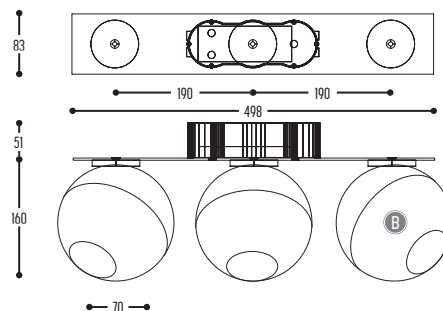FRONTPLATE CUT OUT
180 x 68 mm

430-BB(B)-CCC-00
430-BB(B)-EFFGGH-00-K

Metal



BB(B)		CCC									
COLORS		TYPE									
MATT	02	Black	12 V	100	G53	QR-LP111 (MAX 45 W) incl. transfo					
	03	White		101		QR-LP111 (MAX 45 W) excl. transfo					
	100	Chocolat									
	101	Soft Pink	230 V	060	E27	LED QPAR20 (MAX 20 W)					
	102	Soft Yellow		065	GU10	LED QPAR51 (MAX 7,5 W)					
	103	Soft Blue									
	104	Soft Green									
	105	Cream									
	106	Blue									
	107	Yellow									
	108	Green									
	109	Red									
GLOSSY	30	Silver Chrome	LED	EFF		GG		H		K	
	31	Gold Chrome		CRI • LUMENOUTPUT		REFLECTOR		COLOR TEMP.		DRIVER EXTERN	
	69	Copper Glossy		813	>80 CRI • 1300 Lm / 700 mA / 9,5 W	20	20°	2	2700 K	0	incl./non dim
	202	Black Glossy		907	>95 CRI • 1300 Lm / 700 mA / 13,3 W	40	40°	3	3000 K	1	excl.
	203	White Glossy				60	60°	4	4000 K	2	Dim 1-10 V
										3	Dali



on request


Lampbase is standard matt black for all spheres; matt white for white spheres.

12-25

SUSPENSION < CEILING < TRACK < WALL < TABLE



12-25 MALAGA1

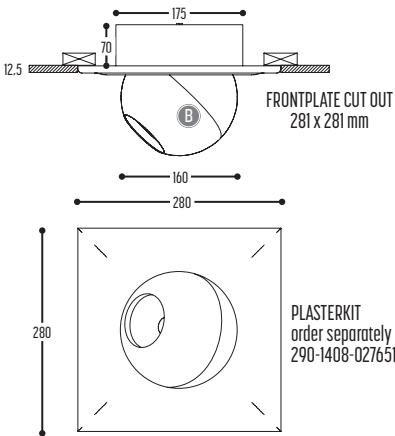


408-BB(B)-CCC-00
408-BB(B)-EFFGGH-00-K

Metal

1 LAMPS 11.5 kg CE 0.7m 960° IP40 365° 180° CC DRIVER

12-25 MALAGA2

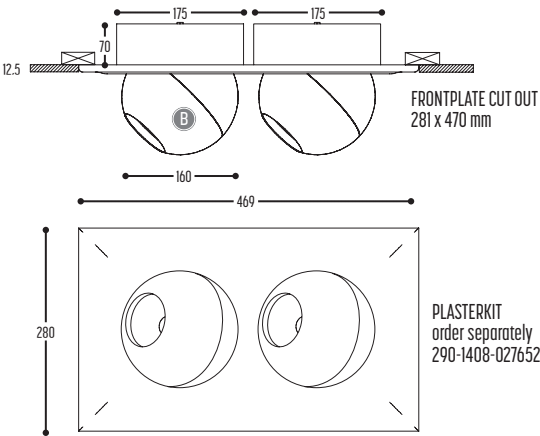

422-BB(B)-CCC-00
422-BB(B)-EFFGGH-00-K

Metal


2 LAMPS 2 kg CE 0.7m 960° IP40 365° 180° CC DRIVER

BB(B)				CCC									
COLORS				TYPE									
MATT	02		Black		100	G53		QR-LP111 (MAX 45 W) incl. transfo					
	03		White		101			QR-LP111 (MAX 45 W) excl. transfo					
	100		Chocolat										
	101		Soft Pink		060	E27		LED QPAR20 (MAX 20 W)					
	102		Soft Yellow		065	GU10		LED QPAR51 (MAX 7,5 W)					
	103		Soft Blue										
	104		Soft Green										
	105		Cream										
	106		Blue										
	107		Yellow	EFF				GG		H		K	
	108		Green	CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		DRIVER EXTERN	
109		Red	LED	813	>80 CRI • 1300 Lm / 700 mA / 9,5 W			20	20°	2	2700 K	0	incl./non dim
GLOSSY	30			907	>95 CRI • 1300 Lm / 700 mA / 13,3 W			40	40°	3	3000 K	1	excl.
	31			Silver Chrome				60	60°	4	4000 K	2	Dim 1-10 V
	69		Copper Glossy									3	Dali
	202		Black Glossy										
	203		White Glossy										
	 on request												



12-25 TRACK S

TRACK RAIL: to be ordered separately - check compatibility
Compatible with Eutrac / Global / Powergear

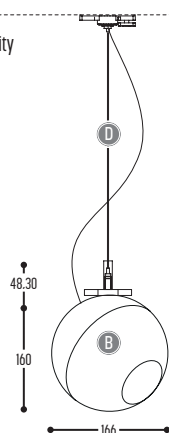


462-BB(B)-CCC-DD

Metal




12-25 TRACK1 LED

TRACK RAIL: to be ordered separately - check compatibility
Non dim. compatible with Eutrac / Global / Powergear
Dim. compatible with Global / Powergear

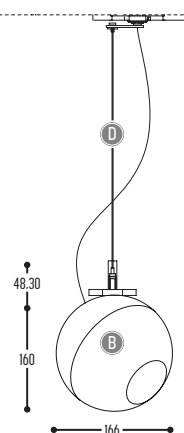

462-BB(B)-EFFGGH-DD-K

Metal



BB(B)				CCC							DD					
COLORS				TYPE							SUSP. CABLE					
MATT	02		Black	 230 V	060	E27		LED QPAR20 (MAX 20 W)			01	1,5 m				
	03		White		065	GU10		LED QPAR51 (MAX 7,5 W)			02	2,5 m				
	100		Chocolat													
	101		Soft Pink													
	102		Soft Yellow													
	103		Soft Blue													
	104		Soft Green													
	105		Cream													
	106		Blue													
	107		Yellow													
	108		Green													
	109		Red													
GLOSSY	30		Silver Chrome													
	31		Gold Chrome													
	69		Copper Glossy													
	202		Black Glossy													
	203		White Glossy													
	 on request															








12-25 TRACK

461-BB(B)-CCC-00

Metal




TRACK RAIL: to be ordered separately - check compatibility
Compatible with Eutrac / Global / Powergear

12-25 TRACK LED

461-BB(B)-EFFGGH-00-K

Metal

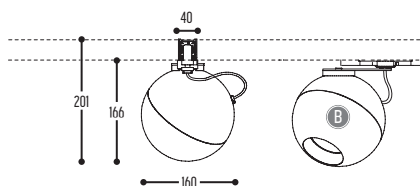

TRACK RAIL: to be ordered separately - check compatibility
Non dim. compatible with Eutrac / Global / Powergear
Dim. compatible with Global / Powergear

BB(B)				CCC											
COLORS				TYPE											
MATT	02		Black	 230 V	060	E27		LED QPAR20 (MAX 20 W)							
	03		White		065	GU10		LED QPAR51 (MAX 7,5 W)							
	100		Chocolat												
	101		Soft Pink												
	102		Soft Yellow												
	103		Soft Blue												
	104		Soft Green	EFF				GG		H		K			
	105		Cream	CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		DRIVER			
	106		Blue	LED	813	>80 CRI • 1300 Lm / 700 mA / 9,5 W				20	20°	2	2700 K	0	incl./non dim
	107		Yellow		907	>95 CRI • 1300 Lm / 700 mA / 13,3 W				40	40°	3	3000 K	3	Dali
	108		Green						60	60°	4	4000 K			
109		Red													
GLOSSY	30		Silver Chrome												
	31		Gold Chrome												
	69		Copper Glossy												
	202		Black Glossy												
	203		White Glossy												
	 on request														







AGUJA

design ricardo bofill taller de arquitectura for dark


AGUJA 115

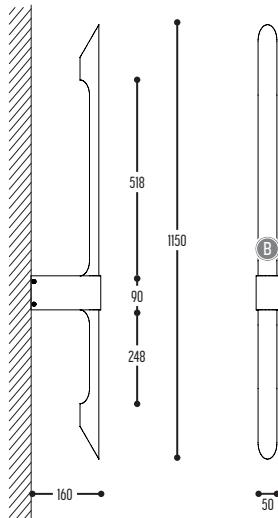


1279-BB(B)-3-K



AGUJA 170

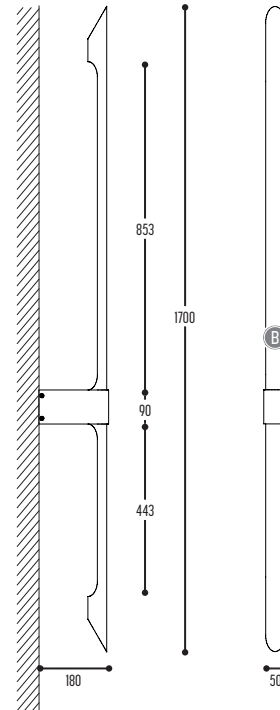

1275-BB(B)-3-K



BB[B]			E				K	
COLORS			TYPE				DRIVER	
02		Black	3	LED	AGUJA 115	>80CRI • 3300 Lm / 18,6W / 3000K	0	incl./non dim
03		White			AGUJA 170	>80CRI • 4400 Lm / 24,8W / 3000K	1	excl.
112		Gold point					2	Dim 1-10 V (Extern)
							3	Dali (Extern)




 www.pinterest.com/pindark/angle-beam-dark

ANGLE BEAM


design anthony boelaert for dark



ANGLE BEAM 1

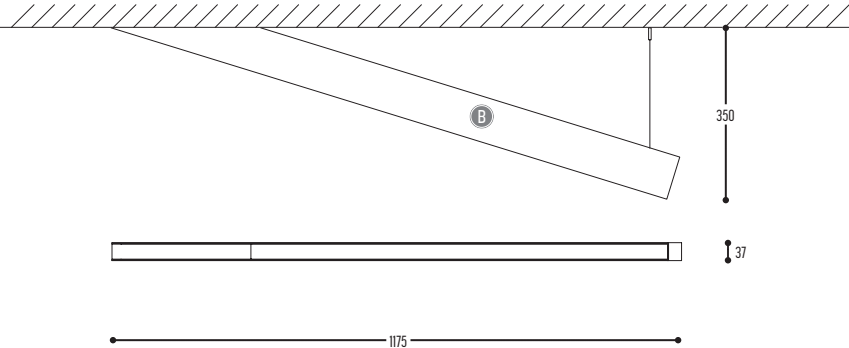


1230-BB(B)-CCC-00-J
1230-BB(B)-824003-0-K




BB(B)			CCC						J					
COLORS			TYPE						DOWN TYPE					
02		Black	121	G5		T16 (21 W) Non Dim			0	opal cover				
03		White	139			T16 (39 W) Non Dim			1	prismatic cover				
100		Chocolat	140			T16 (39 W) Dim 1-10 V								
101		Soft Pink	141			T16 (39 W) ONE 4 ALL								
102		Soft Yellow												
103		Soft Blue												
104		Soft Green	EFF			GG		H		J		K		
105		Cream	CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		DOWN TYPE		DRIVER		
106		Blue	LED	824	>80 CRI • 2400 Lm / 27 W		00	N.A.	3	3000 K	0	opal cover	0	incl./non dim
107		Yellow									2	Dim 1-10 V		
108		Green									3	Dali		
109		Red												
111		Brass Paint												
112		Gold Paint												



ANGLE BEAM 2

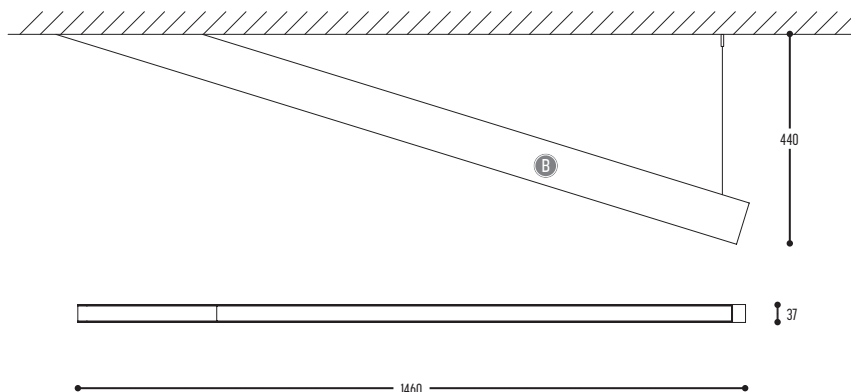

1230-BB(B)-CCC-00-J
1230-BB(B)-824003-0-K



BB(B)			CCC						J			
COLORS			TYPE						DOWN TYPE			
02		Black	128	G5		T16 (28 W) Non Dim			0	opal cover		
03		White	154			T16 (54 W) Non Dim			1	prismatic cover		
100		Chocolat	155			T16 (54 W) Dim 1-10 V						
101		Soft Pink	156			T16 (54 W) ONE 4 ALL						
102		Soft Yellow										
103		Soft Blue										
104		Soft Green	EFF			GG		H		J	K	
105		Cream	CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		DOWN TYPE	DRIVER	
106		Blue	LED	832	>80 CRI • 3200 Lm / 36 W		00	N.A.	3	3000 K	0	incl./non dim
107		Yellow									2	Dim 1-10 V
108		Green									3	Dali
109		Red										
111		Brass Paint										
112		Gold Paint										




APOLLO

design romy kühne for dark



740-BB-001-DD-II(I)
740-BB-830002-DD-II(I)-K

Stainless steel

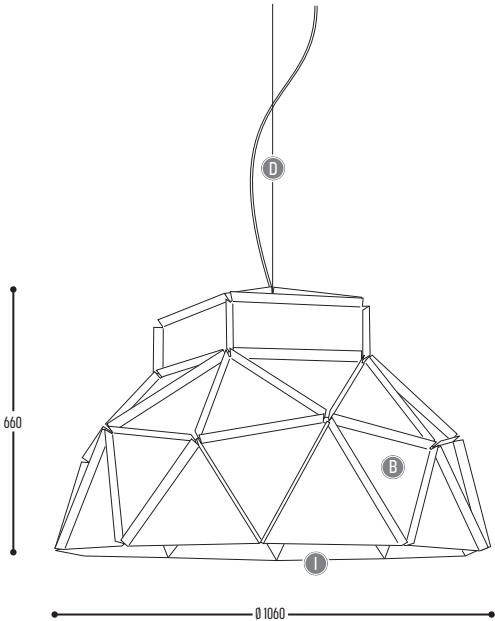

BB			CCC					DD	II(I)												
COLOR OUTSIDE			TYPE					SUSP. CABLE		COLOR INSIDE											
02		Black	001	E27		TCG-SE / Globe (MAX 20 W)				02	2,5 m	02		Black	K DRIVER <table><tr><td>0</td><td>incl./non dim</td></tr><tr><td>2</td><td>Dim 1-10 V</td></tr><tr><td>3</td><td>Dali</td></tr></table>	0	incl./non dim	2	Dim 1-10 V	3	Dali
0	incl./non dim																				
2	Dim 1-10 V																				
3	Dali																				
03		White		LED / Globe (MAX 15 W)				03	5 m	03		White									
10		Inox								100		Chocolat									
										101		Soft Pink									
										102		Soft Yellow									
										103		Soft Blue									
										104		Soft Green									
										105		Cream									
										106		Blue									
										107		Yellow									
										108		Green									
							109		Red												
							G		Gold point												
							On request														

ATSJI

IP20-IP44



fixation included
for concrete ceiling & plaster ceiling

Alu

IP20 1335-BB(B)-814GGH-K

IP44 1336-BB(B)-814GGH-K

1 LAMPS

0,5 kg


CE

230 V

CC DRIVER

0,3m

960°

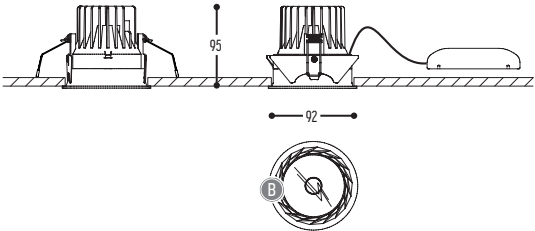

ATSJI MOVE

IP20-IP44



fixation included
for concrete ceiling & plaster ceiling

Alu

IP20 1337-BB(B)-814GGH-K

IP44 1338-BB(B)-814GGH-K

1 LAMPS

0,5 kg

CE


30°

230 V

CC DRIVER

0,3m

960°

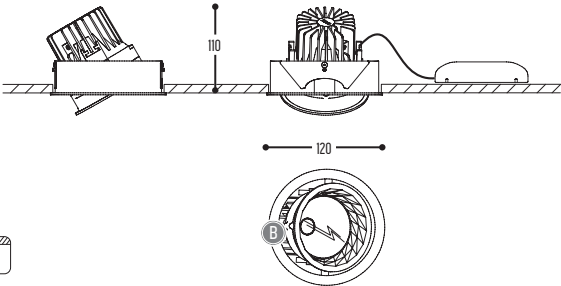


www.pinterest.com/pindark/atsji-dark

BB(B)			EFF			GG		H		K	
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		DRIVER EXTERN	
02		Black	LED	814	>85 CRI • 1450 Lm / 350 mA / 10W	22	22°	2	2700 K	0	incl./non dim
03		White				34	34°	3	3000 K	1	excl.
68		Copper point				54	54°	4	4000 K	2	Dim 1-10 V
100		Chocolat							3	Dali	
101		Soft Pink									
102		Soft Yellow									
103		Soft Blue									
104		Soft Green									
105		Cream									
106		Blue									
107		Yellow									
108		Green									
109		Red									
112		Gold point									

ATSJI C

IP20-IP44



Alu


IP20 1331-BB(B)-814GGH-K-II(I)

IP44 1332-BB(B)-814GGH-K-II(I)



ATSJI C MOVE

IP20-IP44

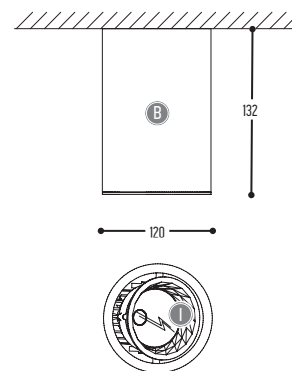

Alu

IP20 1333-BB(B)-814GGH-K-II(I)


IP44 1334-BB(B)-814GGH-K-II(I)



BB(B)			EFF			GG		H		K		II(I)		
COLORS BODY			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		DRIVER		COLORS		
02		Black	LED	814	>85 CRI • 1450 Lm / 350 mA / 10W	22	22°	2	2700 K	0	incl./non dim	02		Black
03		White				34	34°	3	3000 K	1	excl.	03		White
68		Copper paint				54	54°	4	4000 K	2	Dim 1-10 V	68		Copper paint
100		Chocolat								3	Dali	100		Chocolat
101		Soft Pink								101		Soft Pink		
102		Soft Yellow								102		Soft Yellow		
103		Soft Blue								103		Soft Blue		
104		Soft Green								104		Soft Green		
105		Cream								105		Cream		
106		Blue								106		Blue		
107		Yellow								107		Yellow		
108		Green								108		Green		
109		Red								109		Red		
112		Gold paint								112		Gold paint		



ATSJOEM




2011-BB-8FF-36H-K

Metal | Alu



ATSJOEM MOVE



2010-BB-8FF-36H-K

Metal | Alu




BB			EFF			GG		H		K		
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		DRIVER EXTERN		
02		Black	LED	809	>80 CRI • 900 Lm / 290 mA / 13 W	36	36°	2	2700 K	0	incl./non dim	
03		White		811	>80 CRI • 1150 Lm / 350 mA / 17 W			3	3000 K	1	excl.	
											3	Dali
											4	phase cut



interior
innovation
award
2015
Selection

A modern, polished brass pendant lamp with a curved, bowl-like shape, suspended by a black cord. The lamp is illuminated from within, casting a warm glow. It is positioned against a plain, light-colored background.

Glass	Steel
-------	-------

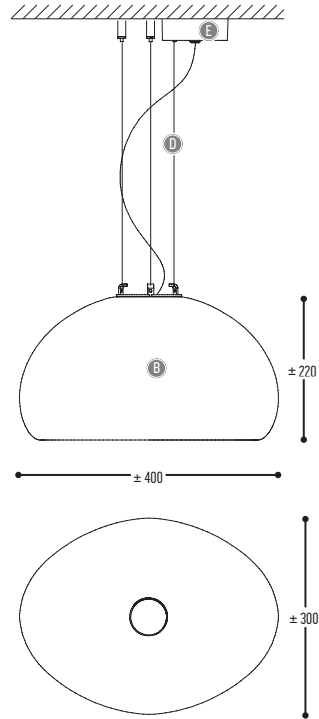


BB			CCC			DD		EE	
COLORS			TYPE			SUSP. CABLE		SUSP. KIT	
30		Silver	001	E27	 QA60 (MAX 42 W)	01	1,5 m	02	 Black
31		Gold			 TCA-SE (MAX 12 W)	02	2,5 m	03	 White
					 LED (MAX 12 W)				

AUSUM S WHITE




1052-03-EFF002-DD-K-LL

Glass | Alu

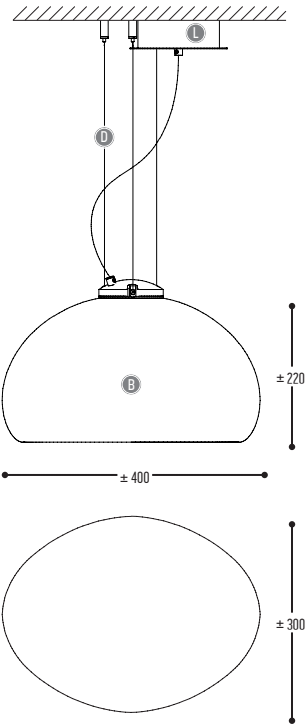

BB			EFF			GG		H		DD		K		LL		
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		SUSP. CABLE		DRIVER		SUSP. KIT		
03	White (translucent)	LED	808	>80 CRI • 1300 Lm / 700 mA / 9,5 W			00	N.A.	2	2700 K	01	1,5 m	0	incl./non dim	02	Black
			908	>90 CRI • 1000 Lm / 500 mA / 9,2 W							02	2,5 m	1	excl.	03	White
												2	Dim 1-10 V			
												3	Dali			

AUSUM

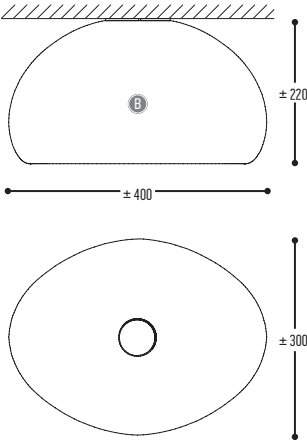

1051-BB-001-00

Glass

Steel

1 LAMPS

6 kg

CE


230 V

960°

IP40

0.5m

AUSUM JR.

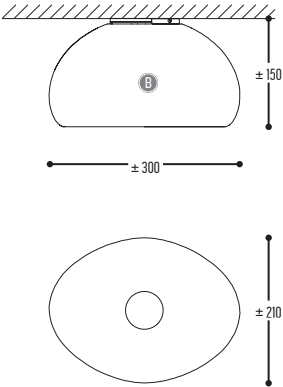

1056-BB-001-00

Glass

Steel

1 LAMPS

3 kg

CE

230 V

960°

IP40

0.5m

BB			CCC		
COLORS			TYPE		
30		Silver	001	E27	 QA60 (MAX 42 W)
31		Gold			 TCA-SE (MAX 12 W)
					 LED (MAX 12 W)



BABY BUBBLE

design alex de witte for daek

DESIGN PLUS
powered by: light+building

DISTRICT
AWARD 2013
1ST PRICE




reddot design award
winner 2014



USA 2014

1005-BB-001-DD-LL
1005-BB-EFF002-DD-K-II(I)-LL

Glass Metal

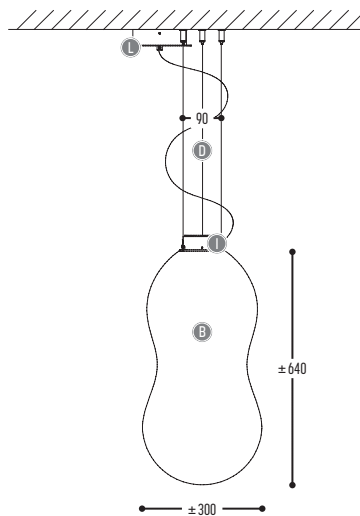

BB			CCC					DD	-				LL					
COLORS			TYPE					SUSP. CABLE						SUSP. KIT				
00		Transparent		001	E27		LED (MAX 12 W)		01	1,5 m		02  Black						
49		Amber					02	2,5 m		03  White								
58		Smoke																
			EFF			GG	H	DD	K		II(I)		LL					
			CRI • LUMENOUTPUT			REFLECTOR	COLOR TEMP.	SUSP. CABLE		DRIVER		TOP		SUSP. KIT				
	805	>80 CRI • 725 Lm / 500 mA / 6,6 W			00	N.A.	2	2700 K	01	1,5 m		0	incl./non dim		10	 Alu	02	 Black
	905	>90 CRI • 725 Lm / 500 mA / 9,2 W							02	2,5 m		2	Dim 1-10 V		114	 Brass Anodized	03	 White
									3		Dali							
									4		Phase cut							




BALLZZZ

design anthony boelaert for dark





KING OR QUEEN
CHOOSE YOUR CHANDELIER.

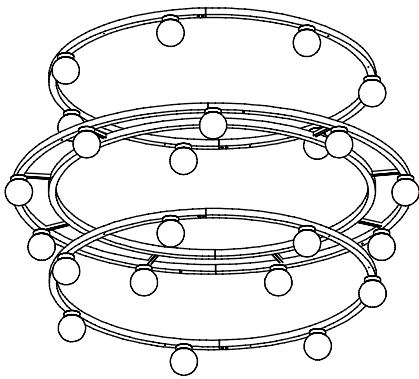


BALLZZZ ONE 1200

+

BALLZZZ TWO 1800

+


BALLZZZ ONE 1200



BALLZZZ TWO 950

+

BALLZZZ ONE 700

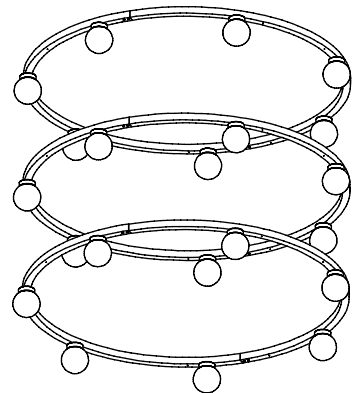

BALLZZZ ONE 1800

+


BALLZZZ ONE 1800

+

BALLZZZ ONE 1800



BALLZZZ ONE 700




700

1911-BB-90600H-DD-K

Alu | Glass




BALLZZZ ONE 950




950

1913-BB-90600H-DD-K

Alu | Glass



BALLZZZ ONE 1200




1200

1915-BB-90600H-DD-K



BALLZZZ ONE 1500




1500

1916-BB-90600H-DD-K



BALLZZZ ONE 1800



1800

1917-BB-90600H-DD-K




BB	EFF	H	DD	K
COLORS	CRI • LUMENOUTPUT	COLOR TEMP.	SUSP. CABLE	DRIVER
02	Black	2	01	0
03	White	3	02	2
on request			03	3





 www.pinterest.com/pindarkballzzz-dark

BALLZZZ TWO 950



— 700 —


— 950 —

2001-BB-90600H-DD-K

Alu	Glass
-----	-------



BALLZZZ TWO 1200




— 950 —


— 1200 —

2003-BB-90600H-DD-K

Alu	Glass
-----	-------



BALLZZZ TWO 1500



1200


1500

2005-BB-90600H-DD-K

Alu | Glass



BALLZZZ TWO 1800



1500


1800

2006-BB-90600H-DD-K

Alu | Glass



BALLZZZ TWO 2200



1800

2200

2007-BB-90600H-DD-K

Alu | Glass




BB	EFF		H		DD	K
COLORS	CRI • LUMEN OUTPUT		COLOR TEMP.		SUSP. CABLE	DRIVER
02	LED	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	2	01	incl./non dim
03				3	02	Dim 1-10 V
on request					03	Dali




Possibilities


E27 fitting
order lamps
see page 360




down outside




down inside



up outside




up inside



double down

BALLZZZ FDR 700




700

1911-BB-001-DD-J

Alu



BALLZZZ FDR 950




950

1913-BB-001-DD-J

Alu



BALLZZZ FDR 1200




1200

1915-BB-001-DD-J

Alu



BALLZZZ FDR 1500




1500

1916-BB-001-DD-J

Alu



BALLZZZ FDR 1800



1800

1917-BB-001-DD-J

Alu



BB	CCC			DD	J
COLORS	TYPE			SUSP. CABLE	UP DOWN TYPE
02	001	E27	TCG-SE / Globe (MAX 15 W)	01	0 down outside
03			LED (MAX 10 W)	02	1 down inside
 on request				03	2 up outside
					3 up inside
					4 double down



BANGSTER

design dark studio for dark

BANGSTER S



2140-BB-804002-DD

2140-BB-90600H-DD-K

230 V VAC LED

CC DRIVER

Alu

Glass

1 LAMPS

2 kg

CE


0.3m

960°

IP20

50°


LED

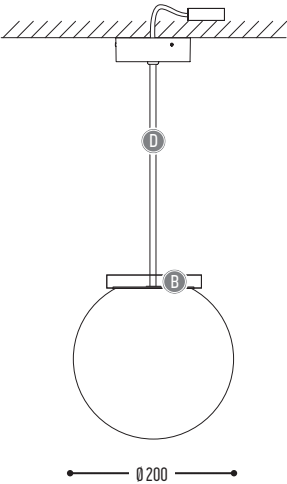

BB			EFF			GG		H		DD		K	
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		SUPS. TUBE		DRIVER EXTERN	
02		Black	LED	804	>80 CRI • 400 Lm / 220 VAC / 4W	00	N.A.	2	2700 K	1	1,5 m	0	incl./non dim
03		White						3	3000 K	2	2,5 m	1	excl.
 on request		906				4	4000 K			2	Dim 1-10 V		
										3	Dali		



design frank janssens for dark

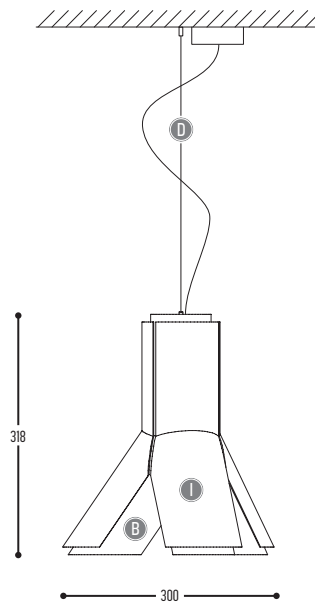
171



BRIDGE ONE

120-BB(B)-010-DD


Metal Steel

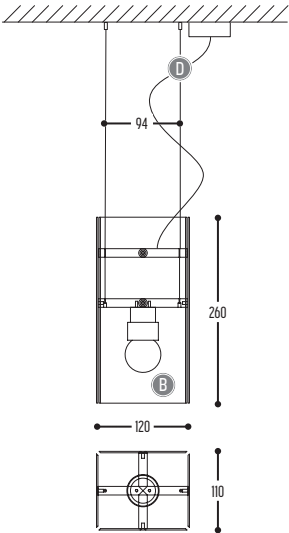

BRIDGE TWO

121-BB(B)-010-DD

Metal Steel

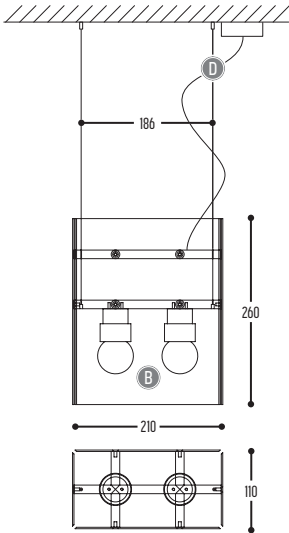


BB(B)		CCC			DD
COLORS		TYPE			SUSP. CABLE
02		010	E27	 QD45 (MAX 42 W)	01 1,5 m
03				 TCA-SE P45 (MAX 11 W)	02 2,5 m
110				 LED P45 (MAX 12 W)	

BRIDGE ONE 3P

123-BB(B)-010-01


Technical specifications for Bridge One 3P, including material options (Metal, Steel), lamp count (3), weight (5 kg), certifications (CE, ENEC, 230 V), beam diameter (Ø0.5 m), beam length (960"), IP rating (IP20), and mounting options (wall, ceiling).

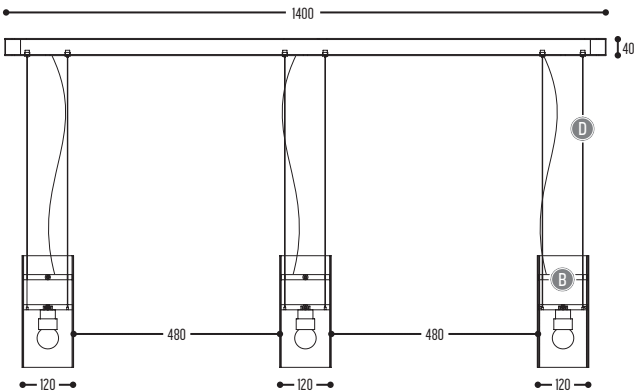

BRIDGE TWO 3P

124-BB(B)-010-01

Technical specifications for Bridge Two 3P, including material options (Metal, Steel), lamp count (6), weight (8 kg), certifications (CE, ENEC, 230 V), beam diameter (Ø0.5 m), beam length (960"), IP rating (IP20), and mounting options (wall, ceiling).

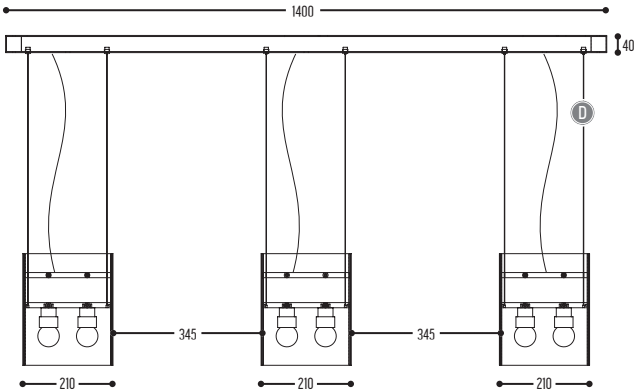


BB(B)			CCC			DD	
COLORS			TYPE			SUSP. CABLE	
02		Black Mat	010	E27	QD45 (MAX 42 W)	01	1,5 m
03		White Mat			TCA-SE P45 (MAX 11 W)		
110		Brass			LED P45 (MAX 12 W)		

BRIDGE WALL



122-BB(B)-010-00

Metal | Steel

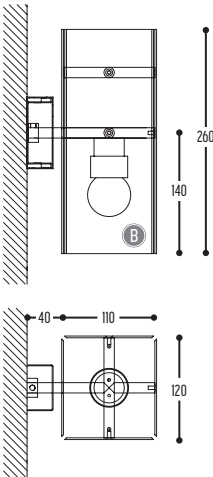

BB(B)			CCC		
COLORS			TYPE		
02		Black Mat	010	E27	 QD45 (MAX 42 W)
03		White Mat			 TCA-SE (MAX 11 W)
110		Brass			 LED P45 (MAX 12 W)



CAPITANO

design dark studio for dark



1086-67-001-DD

Cork

1 LAMPS

2 kg


CE

230 V

0,3m

960°

IP20

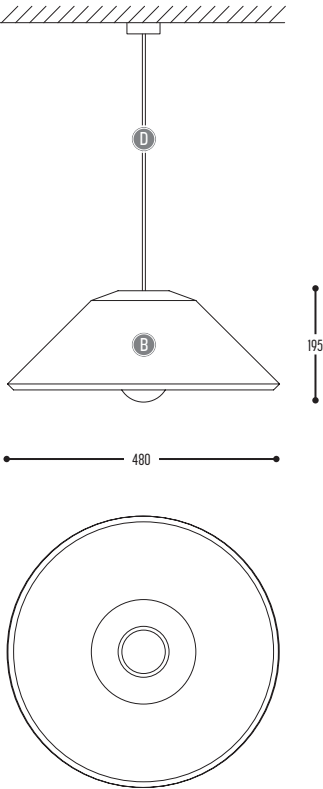

BB		CCC				DD	
COLORS		TYPE				SUSP. CABLE	
67	Cork	001	E27	 TCG-SE / Globe (MAX 20 W)		01	1,5 m
				 LED (MAX 15 W)		02	2,5 m




CAPTAIN CORK

design miguel arrunda for dark



CAPTAIN CORK S

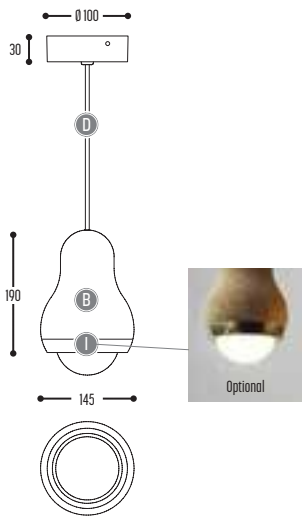

1020-67-001-DD-(III)

Cork

1 LAMPS

0,6 kg

CE

230 V


0,5m

960°

IP20

1

CAPTAIN CORK 45 S



1021-67-001-DD

Cork

1 LAMPS

0,6 kg

CE

230 V


0,5m

960°

IP20

1

CAPTAIN CORK MAX S

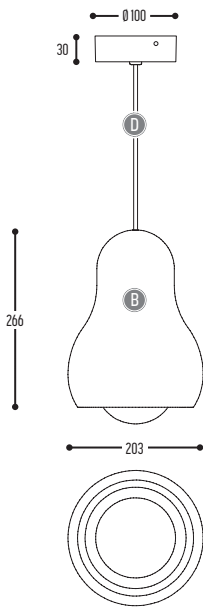

1022-67-001-DD

Cork

1 LAMPS

1 kg

CE

230 V


0,5m

960°


IP20

1


BB		CCC			DD	(III) optional	
COLORS		TYPE			SUSP. CABLE	ROYAL CROWN	
67	Cork	001	E27		01	1,5 m	110 brass
					02	2,5 m	128 copper
				LED (MAX 10 W)			

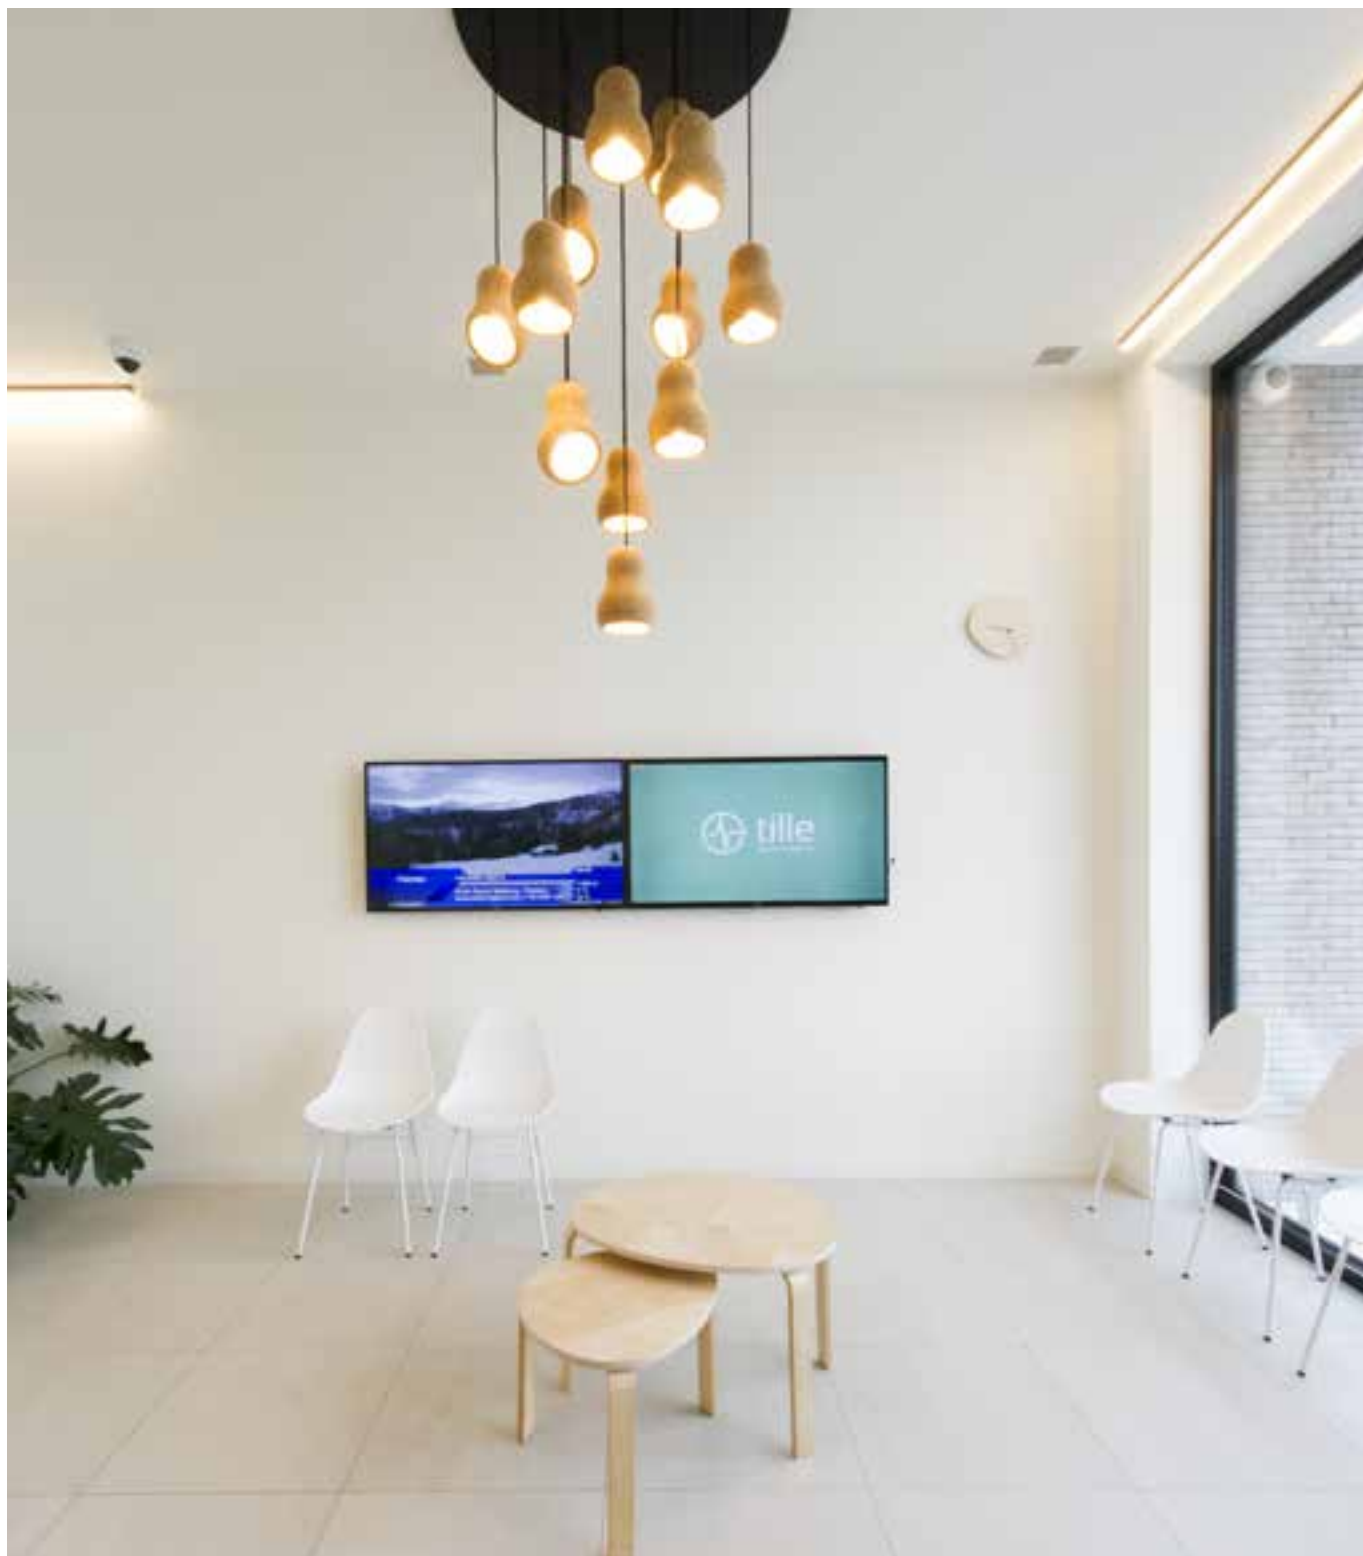


CAPTAIN CORK CLUB3

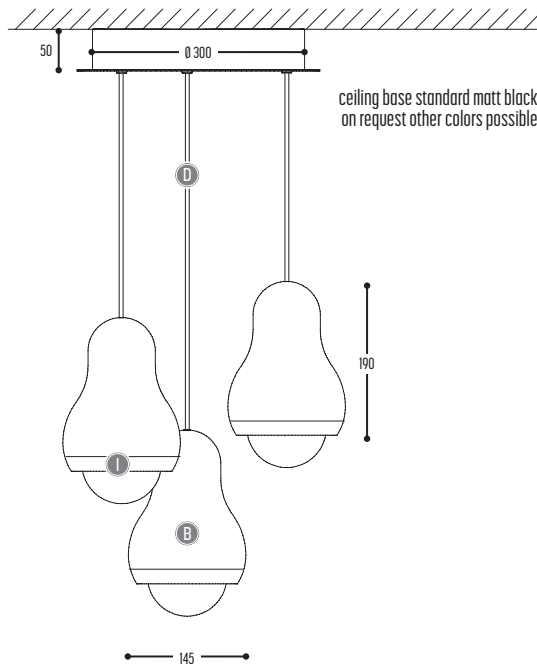


1023-67-001-DD-(III)



CAPTAIN CORK CLUB5

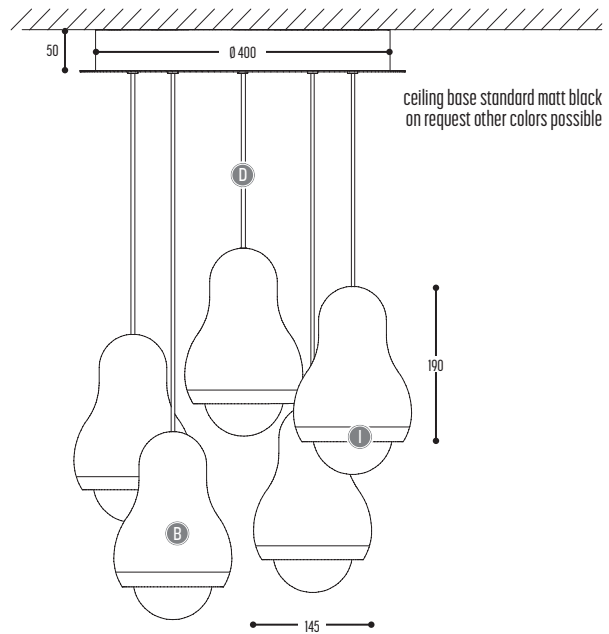

1024-67-001-DD-(III)




BB		CCC			DD		(III) optional	
COLORS		TYPE			SUSP. CABLE		ROYAL CROWN	
67	Cork	001	E27	 TCG-SE / Globe (MAX 15 W)	01	1,5 m	110	 brass
				 LED (MAX 10 W)	02	2,5 m	128	 copper




COOLCAT

design luc vincent & mathilde roman for dark

COOLCAT S

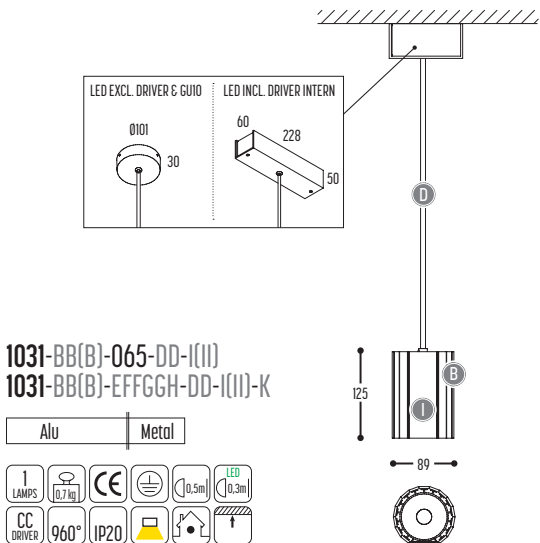

COOLCAT S2

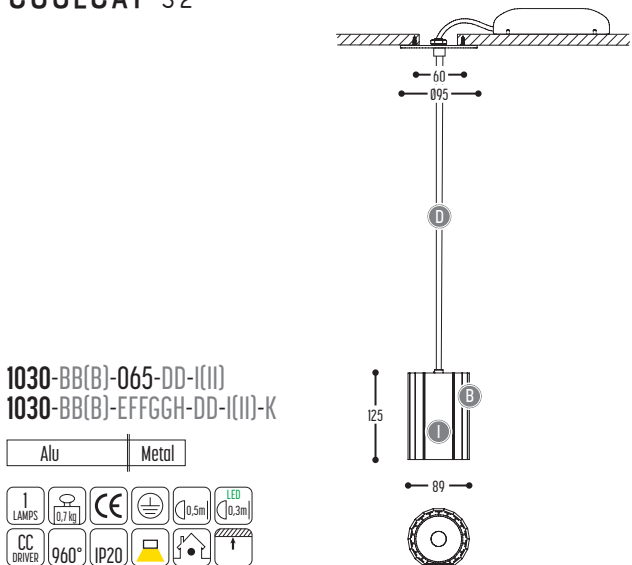

BB			CCC					DD		I(II)					
COLORS			TYPE					SUSP. CABLE		COLOR INSERT					
02		Black	 230 V	065	GU10		QPAR5i (MAX 50 W)			01	1,5 m	B		Black	K
03		White					02	2,5 m	W		White				
							LED (MAX 7,5 W)			30			Chrome		
					100		Chocolat								
					101		Soft Pink								
					102		Soft Yellow								
					103		Soft Blue								
					104		Soft Green								
					105		Cream								
					106		Blue								
					107		Yellow								
					108		Green								
					109		Red								
					110		Brass								
										DRIVER EXTERN					
								0	incl./non dim						
								1	excl.						
								2	Dim 1-10 V						
								3	Dali						


EFF		GG		H			
CRI • LUMENOUTPUT		REFLECTOR		COLOR TEMP.			
LED	817	>80 CRI • 1500 Lm / 500 mA / 10,6 W		20	20°	2	2700 K
	910	>95 CRI • 1300 Lm / 700 mA / 13,3 W		40	40°	3	3000 K
				60	60°	4	4000 K

COOLCAT



1032-BB-065-00-I(II)
1032-BB-EFFGGH-00-I(II)-K

Alu Metal

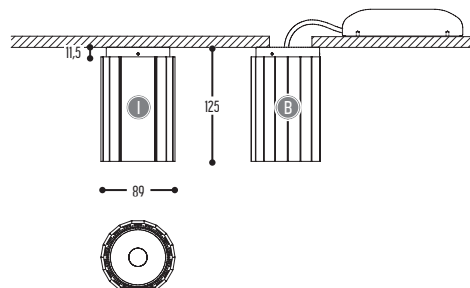


COOLCAT MOVE




1033-BB-065-00-I(II)
1033-BB-EFFGGH-00-I(II)-K

Alu Metal

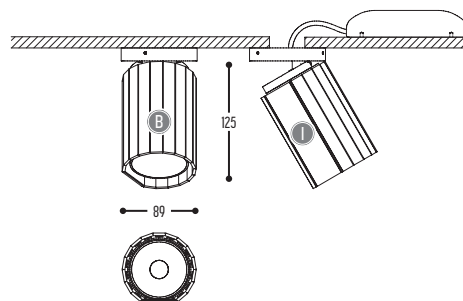

COOLCAT SET2

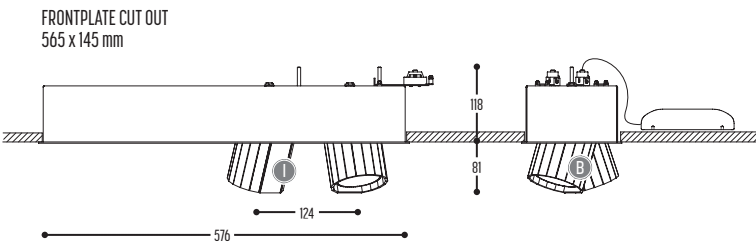

1034-BB-065-00-I(II)
1034-BB-EFFGGH-00-I(II)-K


Alu Metal

2 LAMPS 1 kg CE 365° 20° LED 0,5m 0,3m CC DRIVER 960° IP20

BB			CCC										I(II)					
COLORS			TYPE										COLOR INSERT					
02		Black		065	GU10		QPAR51 (MAX 50 W)							B				Black
03		White					LED (MAX 7,5 W)							W				White
														30		Chrome		
										100		Chocolat						
										101		Soft Pink						
										102		Soft Yellow						
										103		Soft Blue						
										104		Soft Green						
										105		Cream						
										106		Blue						
										107		Yellow						
										108		Green						
										109		Red						
										110		Brass						
			EFF							GG		H		K				
			CRI • LUMENOUTPUT							REFLECTOR		COLOR TEMP.						
			LED	817	>80 CRI • 1500 Lm / 500 mA / 10,6 W					20	20°	2	2700 K					
910	>95 CRI • 1300 Lm / 700 mA / 13,3 W					40	40°	3	3000 K									
						60	60°	4	4000 K									



COOLFIN S

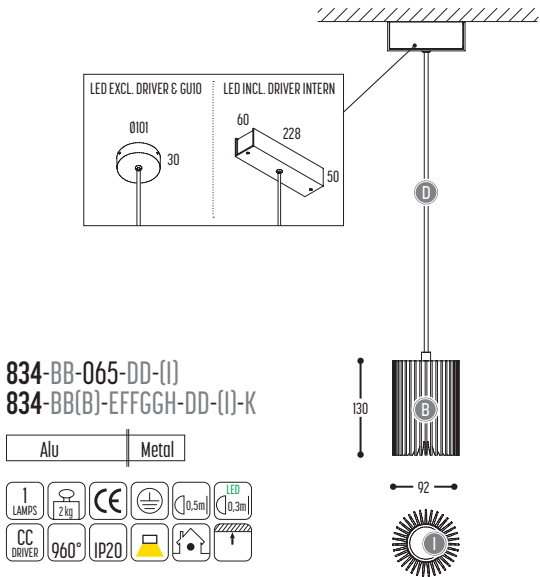


834-BB-065-DD-(I)
834-BB(B)-EFFGGH-DD-(I)-K

Alu Metal



COOLFIN S2

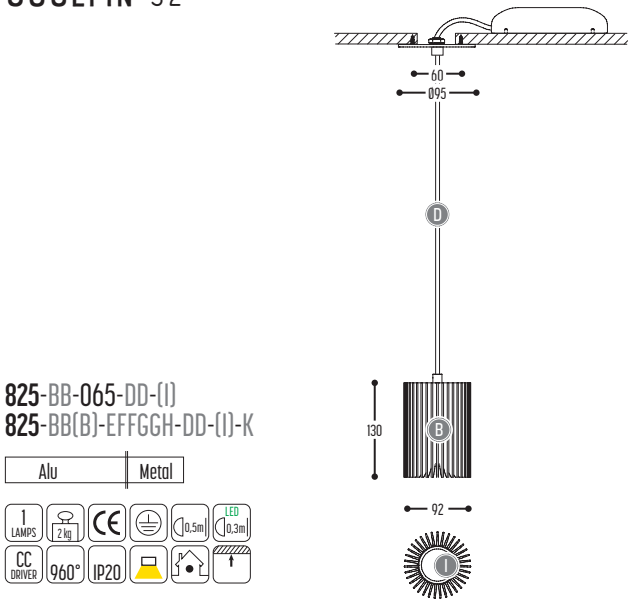

825-BB-065-DD-(I)
825-BB(B)-EFFGGH-DD-(I)-K

Alu Metal




BB			CCC					DD		(I) optional						
COLORS			TYPE					SUSP. CABLE		INSIDE COLOR						
02		Black	 230 V	065	GU10		QPAR51 (MAX 50 W)		01	1,5 m	G 	Gold paint				
03		White							02	2,5 m						
EFF							GG		H		DD		(I) optional		K	
CRI • LUMENOUTPUT							REFLECTOR		COLOR TEMP.		SUSP. CABLE		INSIDE COLOR		DRIVER EXTERN	
	810	>80 CRI • 1300 Lm / 700 mA / 9,5 W					40	40°	2	2700 K	01	1,5 m	G 	Gold paint	0	incl./non dim
	820	>80 CRI • 2000 Lm / 700 mA / 15,2 W					60	60°	3	3000 K	02	2,5 m			1	excl.
	830	>80 CRI • 3000 Lm / 1050 mA / 25,7 W							4	4000 K					2	Dim 1-10 V
	913	>95 CRI • 1300 Lm / 700 mA / 13,3 W													3	Dali

COOLFIN 3P


992-BB-065-DD-(I)
992-BB-EFFGGH-DD-(I)-K

Alu Metal

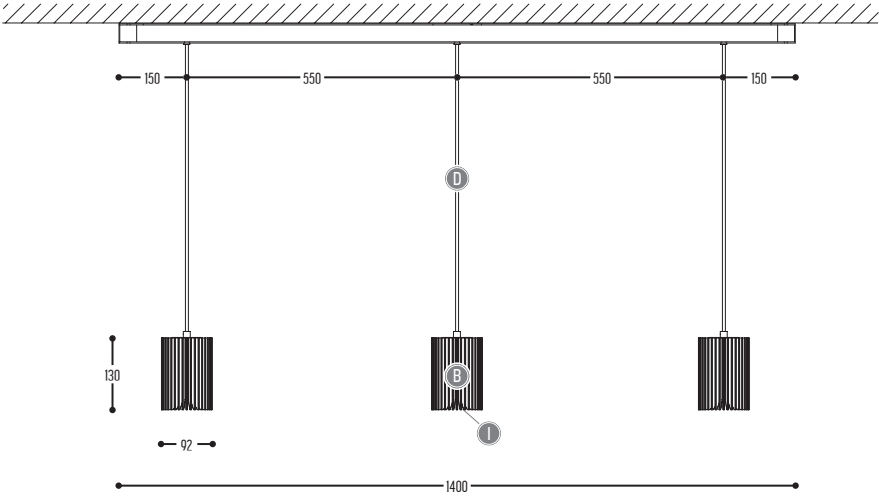

BB		CCC					DD	(I) optional					
COLORS		TYPE					SUSP. CABLE	INSIDE COLOR					
02	 Black	 230 V	065	GU10	 QPAR51 (MAX 50 W)	01	1,5 m	G  Gold paint					
03	 White				 LED (MAX 7,5 W)	02	2,5 m						
EFF					GG	H	DD	(I) optional	K				
CRI • LUMENOUTPUT					REFLECTOR	COLOR TEMP.	SUSP. CABLE	INSIDE COLOR	DRIVER				
LED	810	>80 CRI • 1300 Lm / 700 mA / 9,5 W			40	40°	2	2700 K	01	1,5 m	G  Gold paint	0	incl./non dim
	820	>80 CRI • 2000 Lm / 700 mA / 15,2 W			60	60°	3	3000 K	02	2,5 m		1	excl.
	830	>80 CRI • 3000 Lm / 1050 mA / 25,7 W					4	4000 K				2	Dim 1-10 V
	913	>95 CRI • 1300 Lm / 700 mA / 13,3 W										3	Dali

COOLFIN JR. S

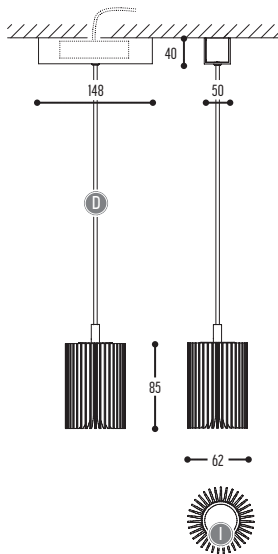


844-02-EFFGGH-DD-(I)-K

Alu Metal



COOLFIN JR. S2

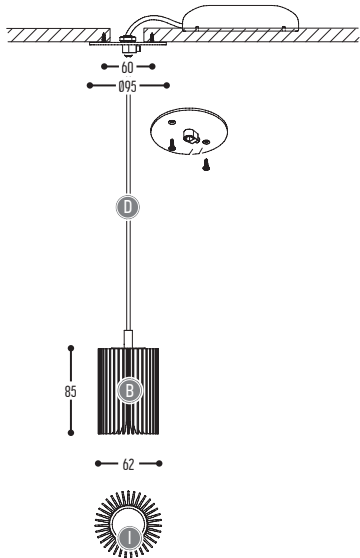

842-02-EFFGGH-DD-(I)-K

Alu Metal



BB	EFF		GG	H	DD	(I) optional	K
COLORS	CRI • LUMENOUTPUT		REFLECTOR	COLOR TEMP.	SUSP. CABLE	INSIDE COLOR	DRIVER
02  Black	LED	807	>80 CRI • 740 Lm / 350 mA / 9,6 W	30 30°	2 2700 K	01 1,5 m	0 incl./non dim
		907	>90 CRI • 740 Lm / 350 mA / 9,6 W	40 40°	3 3000 K	02 2,5 m	1 excl.
				54 54°			2 Dim 1-10 V (extern)
							3 Dali (extern)
							4 Phase cut




COOLFIN



830-BB-065-00-(I)
830-BB-EFFGGH-00-(I)-K

Alu Metal

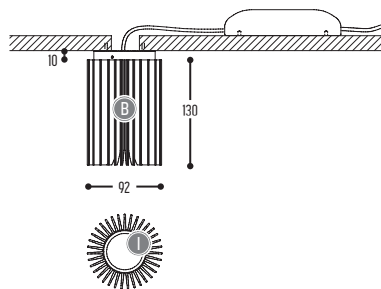


COOLFIN MOVE



829-BB-065-00-(I)
829-BB-EFFGGH-00-(I)-K

Alu Metal

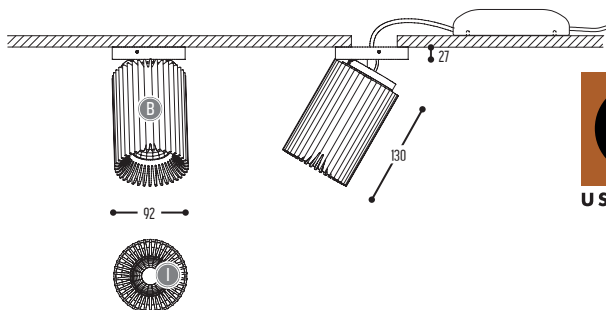

USA 2014

BB			CCC						(I) optional						
COLORS			TYPE						INSIDE COLOR						
02		Black		065	GU10		QPAR51 (MAX 50 W)			G		Gold paint			
03		White					LED (MAX 7,5 W)								
EFF						GG		H		(I) optional			K		
CRI • LUMENOUTPUT						REFLECTOR		COLOR TEMP.		INSIDE COLOR			DRIVER EXTERN		
LED	810	>80 CRI • 1300 Lm / 700 mA / 9,5 W				40	40°	2	2700 K	G		Gold paint	0	incl./non dim	
	820	>80 CRI • 2000 Lm / 700 mA / 15,2 W				60	60°	3	3000 K				1	excl.	
	830	>80 CRI • 3000 Lm / 1050 mA / 25,7 W						4	4000 K				2	Dim 1-10 V	
	913	>95 CRI • 1300 Lm / 700 mA / 13,3 W											3	Dali	

COOLFIN SET1




832-BB-065-00-(I)
832-BB-EFFGGH-00-(I)-K

Alu | Metal



FRONTPLATE CUT OUT
Ø 160 mm

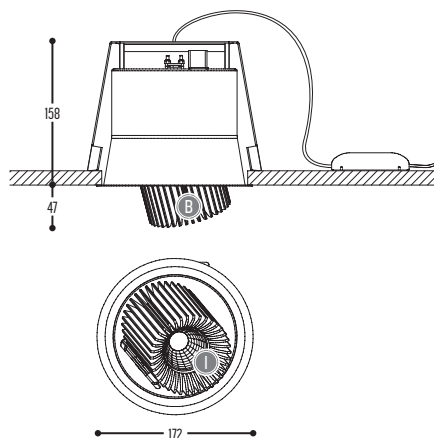

COOLFIN SET2





833-BB-065-00-(I)
833-BB-EFFGGH-00-(I)-K


Alu | Metal




FRONTPLATE CUT OUT
565 x 148 mm

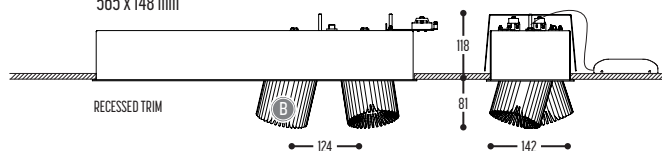

COOLFIN BOX2

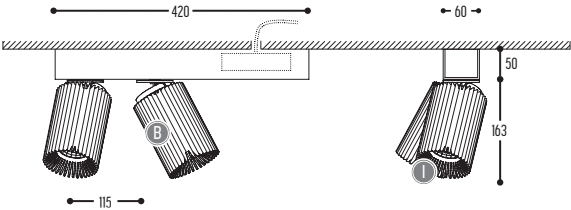


826-BB-065-00-(I)
826-BB-EFFGGH-00-(I)-K



BB			CCC					(I) optional						
COLORS			TYPE					INSIDE COLOR						
02		Black	 230 V	065	GU10		QPAR51 (MAX 50 W)		G		Gold paint			
03		White												
								LED (MAX 7,5 W)						
EFF						GG		H		(I) optional		K		
CRI • LUMENOUTPUT						REFLECTOR		COLOR TEMP.		INSIDE COLOR		DRIVER EXTERN		
LED	810	>80 CRI • 1300 Lm / 700 mA / 9,5 W				40	40°	2	2700 K		G		0	incl./non dim
	820	>80 CRI • 2000 Lm / 700 mA / 15,2 W				60	60°	3	3000 K					1
	830	>80 CRI • 3000 Lm / 1050 mA / 25,7 W						4	4000 K				2	Dim 1-10 V
	913	>95 CRI • 1300 Lm / 700 mA / 13,3 W								3			Dali	



COOLFIN JR. BOX1

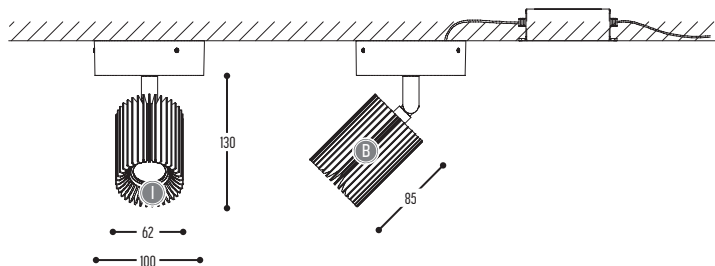

1386-02-EFFGGH-00-(I)-K

Alu Metal



BB		EFF			GG		H		(I) optional		K	
COLORS		CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR		DRIVER	
02	 Black	LED	807	>80 CRI • 740 Lm / 350 mA / 9,6 W	30	30°	2	2700 K	G	 Gold paint	0	incl./non dim
			907	>90 CRI • 740 Lm / 350 mA / 9,6 W	40	40°	3	3000 K			1	excl.
						54	54°					2
											3	Dali (extern)
											4	Phase cut

COOLFIN JR.



840-02-EFFGGH-00-(I)-K

Alu

Metal

1 LAMPS

1,5 kg


CE

III

CC DRIVER

960°

IP20

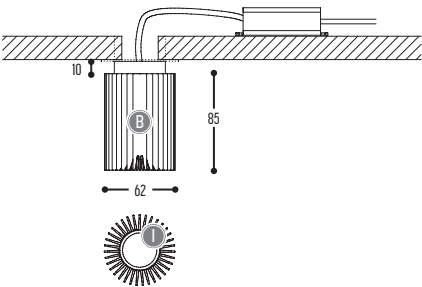

interior
innovation
award
2015

Selection

COOLFIN JR. SET1



1385-02-EFFGGH-00-(I)-K

Alu

Metal

1 LAMPS

1 kg

CE

III


CC DRIVER

960°

360°


80°

IP20

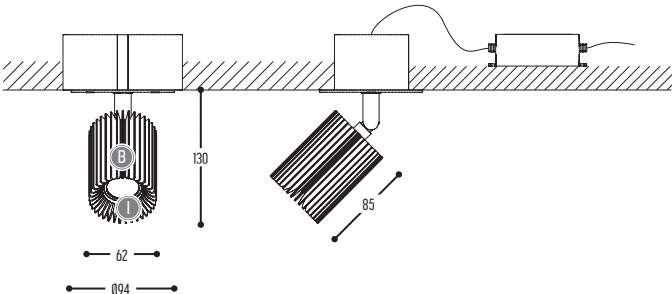

BB			EFF			GG		H		(I) optional		K	
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR		DRIVER EXTERN	
02		Black	LED	807	>80 CRI • 740 Lm / 350 mA / 9,6 W	30	30°	2	2700 K	G	 Gold paint	0	incl./non dim
		907		>90 CRI • 740 Lm / 350 mA / 9,6 W	40	40°	3	3000 K	1			excl.	
						54	54°					2	Dim 1-10 V
												3	Dali
												4	Phase cut

COOLFIN JR. SET2

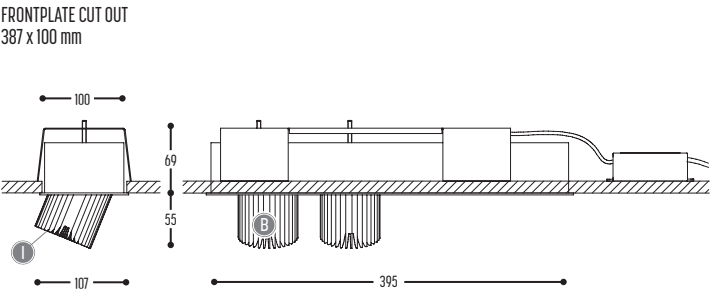


841-02-EFFGGH-00-(I)-K

Alu Metal

2 LAMPS, 2 kg, CE, CC DRIVER, 960°, 365°, 20°, IP40, and other technical icons.

COOLFIN JR. BOX2

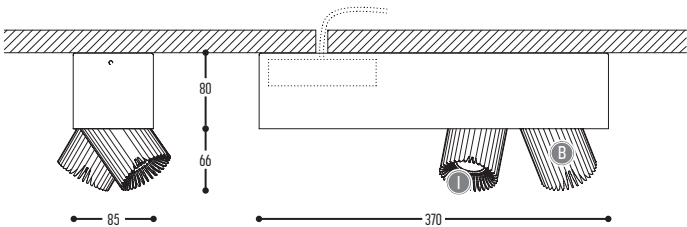


843-02-EFFGGH-00-(I)-K

Alu Metal

2 LAMPS, 2 kg, CE, CC DRIVER, 960°, 365°, 20°, IP40, and other technical icons.

BB	EFF	GG	H	(I) optional	K
COLORS	CRI • LUMENOUTPUT	REFLECTOR	COLOR TEMP.	INSIDE COLOR	DRIVER EXTERN
02 Black	LED807 >80 CRI • 740 Lm / 350 mA / 9,6 W	3030°	22700 K	G Gold paint	0incl./non dim
		4040°	33000 K		1excl.
		5454°			2Dim 1-10 V
	907 >90 CRI • 740 Lm / 350 mA / 9,6 W				3Dali
					4Phase cut

COOLFIN TRACK1

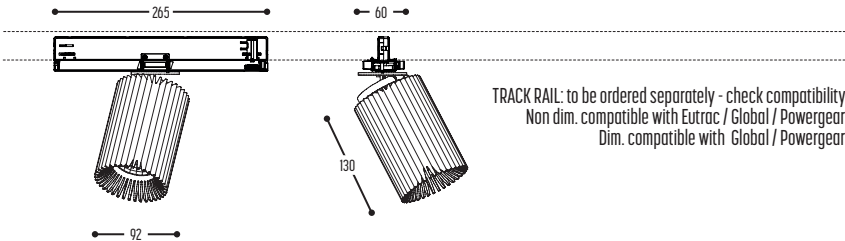

TRACK RAIL: to be ordered separately - check compatibility
Non dim. compatible with Eutrac / Global / Powergear
Dim. compatible with Global / Powergear

827-BB-EFFGGH-00-(I)-K

Alu	Metal
-----	-------



BB			EFF			GG		H		(I) optional			K	
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR			DRIVER	
02		Black	LED	810	>80 CRI • 1300 Lm / 700 mA / 9,5 W	40	40°	2	2700 K	G		Gold paint	0	incl./non dim
03		White		820	>80 CRI • 2500 Lm / 850 mA / 18 W	60	60°	3	3000 K				3	Dali
				913	>95 CRI • 1300 Lm / 700 mA / 13,3 W			4	4000 K					




 www.pinterest.com/pindark/cup-cake-dark

CUP CAKE

design susanne weelings for dark

CUP CAKE SUZY S

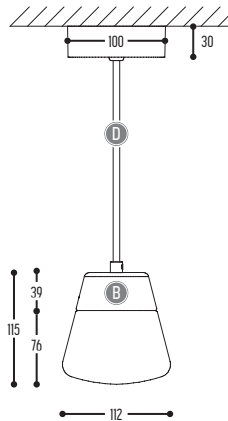

1065-BB(B)-804002-DD


1065-BB(B)-80600H-DD-K



Glass | Alu



CUP CAKE JENNY S

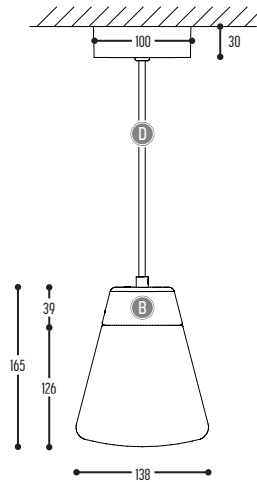

1066-BB(B)-804002-DD


1066-BB(B)-80600H-DD-K



Glass | Alu



CUP CAKE KATHY S

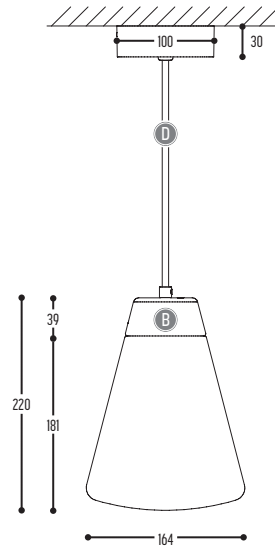

1067-BB(B)-804002-DD

1067-BB(B)-80600H-DD-K



Glass | Alu




BB(B)	EFF	GG	H	DD	K
COLORS	CRI • LUMENOUTPUT	REFLECTOR	COLOR TEMP.	SUSP. CABLE	DRIVER EXTERN
02 Black	LED	00 N.A.	2 2700 K	01 1,5 m	0 incl./non dim
03 White			3 3000 K	02 2,5 m	1 excl.
68 Copper point					2 Dim 1-10 V
112 Gold.point					3 Dali
110 Brass					4 Phase cut

CUP CAKE

SUSPENSION < CEILING

CUP CAKE CLUB 3

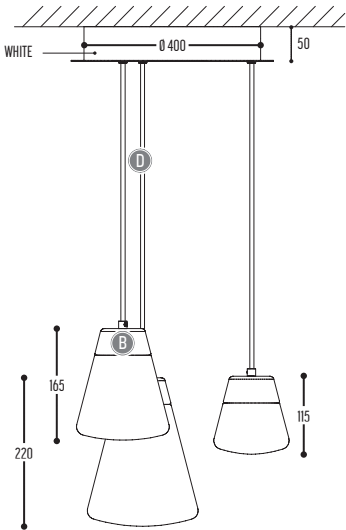

1x CUP CAKE Suzy
1x CUP CAKE Jenny
1x CUP CAKE Kathy

1070-BB(B)-804002-DD


1070-BB(B)-80600H-DD-K



Glass | Alu



CUP CAKE CLUB 5

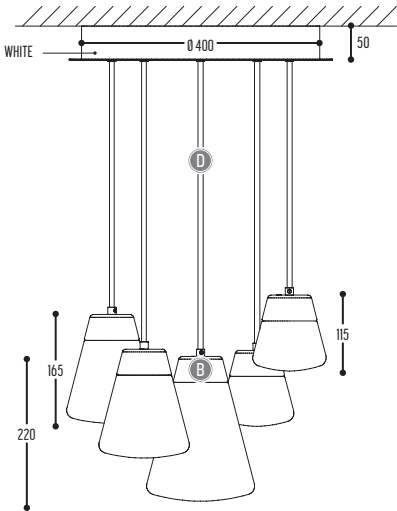

2x CUP CAKE Suzy
2x CUP CAKE Jenny
1x CUP CAKE Kathy

1071-BB(B)-804002-DD

1071-BB(B)-80600H-DD-K




Glass | Alu



BB(B)			EFF			GG		H		DD		K		
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		SUSP. CABLE		DRIVER		
02		Black	LED	804	>80 CRI • 400 Lm / 6W	00	N.A.	2	2700 K	01	1,5 m	0	incl./non dim	
03		White						3	3000 K			02	2,5 m	1
68		Copper point		806	>80 CRI • 600 Lm / 350mA / 6,4W								2	Dim 1-10 V
112		Gold point											3	Dali
110		Brass											4	Phase cut



CUP CAKE SUZY




1060-BB(B)-804002-00
1060-BB(B)-80600H-00-K



Glass | Alu



CUP CAKE JENNY




1061-BB(B)-804002-00
1061-BB(B)-80600H-00-K



Glass | Alu



CUP CAKE KATHY



1062-BB(B)-804002-00
1062-BB(B)-80600H-00-K



Glass | Alu



BB(B)			EFF			GG		H		K	
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		DRIVER EXTERN	
02		Black	LED	804	>80 CRI • 400 Lm / 6W	00	N.A.	2	2700 K	0	incl./non dim
03		White							3	3000 K	4
68		Copper paint		806	>80 CRI • 600 Lm / 350mA / 6,4W						
112		Gold paint									
110		Brass									




CUP CAKE LUCY



1072-BB(B)-804002-00

Glass | Alu

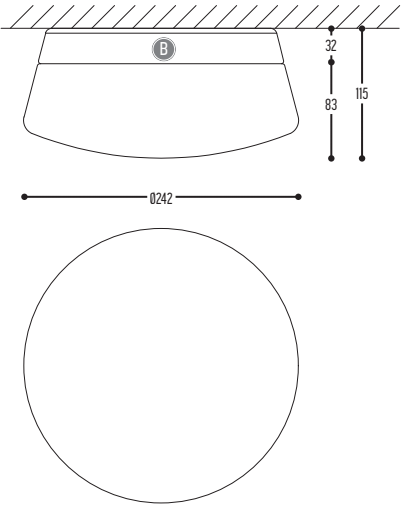

BB(B)			EFF			GG		H	
COLORS			CRI • LUMEN OUTPUT			REFLECTOR		COLOR TEMP.	
02		Black	LED	804	>80 CRI • 1350 Lm / 15W	00	N.A.	2	2700 K
03		White							
68		Copper paint							
112		Gold paint							
110		Brass							



D-CONCRETE


design van missinne for dark

Concrete Metal

110-43-CCC-DD-I



110-43-8663-K-DD-O-J

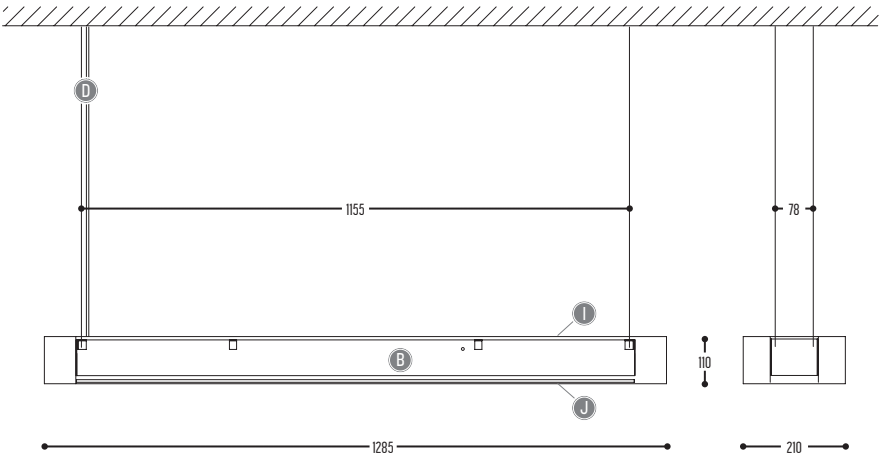

BB			CCC					DD		I				
MATERIAL			TYPE					SUSP. CABLE		UPLIGHT PLEXI				
43		Concrete	128	G5		T16 (28 W) Non Dim		01	1,5 m	C		Clear		
			154			T16 (54 W) Non Dim		02	2,5 m	R		Red		
			155			T16 (54 W) Dim 1-10 V				B		Blue		
			156			T16 (54 W) ONE 4 ALL				G		Green		
EFF				H		K		DD		I			J	
CRI • LUMENOUTPUT				COLOR TEMP.		DRIVER		SUSP. CABLE		UPLIGHT PLEXI			DIFFUSER	
	866	>85 CRI • 7640 Lm / 49,6 W	3	3000 K	0	incl./non dim		01	1,5 m	0	N.A.		1	Opal
					2	Dim 1-10 V		02	2,5 m				2	Prismatic
					3	Dali								



D-COW


design van missinne for dark

Cow Metal

110-40-CCC-DD-I



110-40-8663-K-DD-O-J

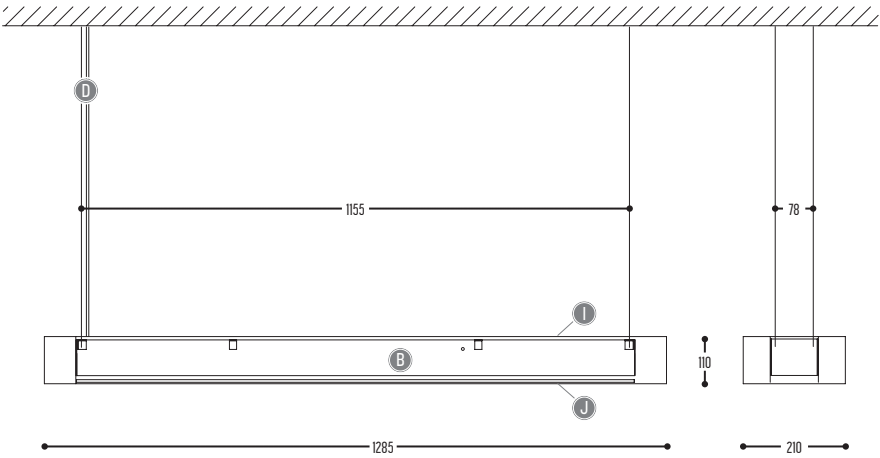

BB		CCC					DD		I				
MATERIAL		TYPE					SUSP. CABLE		UPLIGHT PLEXI				
40	Cow	128	65		T16 (28 W) Non Dim		01	1,5 m	C		Clear		
		154			T16 (54 W) Non Dim		02	2,5 m	R		Red		
		155			T16 (54 W) Dim 1-10 V				B		Blue		
		156			T16 (54 W) ONE 4 ALL				G		Green		
		EFF			H		K		DD		I		J
		CRI • LUMENOUTPUT			COLOR TEMP.		DRIVER		SUSP. CABLE		UPLIGHT PLEXI		DIFFUSER
LED	866	>85 CRI • 7640 Lm / 49,6 W	3	3000 K		0	incl./non dim	01	1,5 m	0	N.A.	1	Opal
						2	Dim 1-10 V	02	2,5 m			2	Prismatic
						3	Dali						



 www.pinterest.com/pindark/d-leather-dark

D-LEATHER


design van missinne for dark

Leather Metal

110-42-CCC-DD-I



110-42-8663-K-DD-0-J

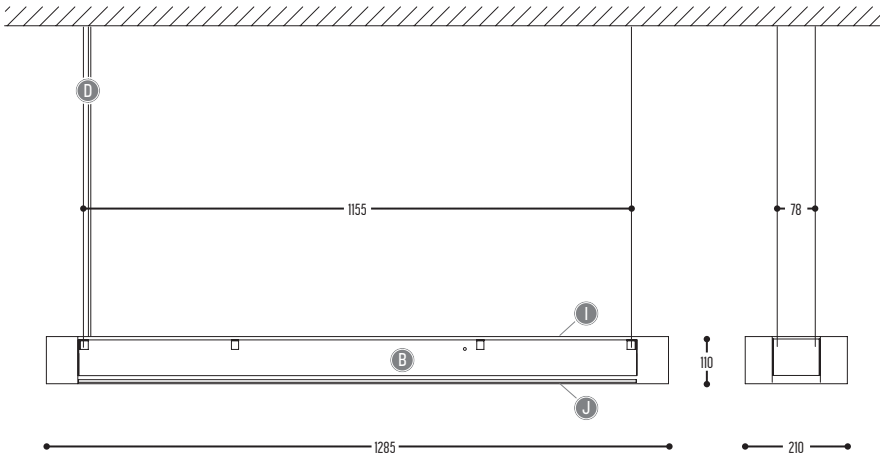

BB			CCC					DD		I					
MATERIAL			TYPE					SUSP. CABLE		UPLIGHT PLEXI					
42		Leather black	128	G5		T16 (28 W) Non Dim			01	1,5 m	C		Clear		
		154			T16 (54 W) Non Dim			02	2,5 m	R		Red			
		155			T16 (54 W) Dim 1-10 V					B		Blue			
		156			T16 (54 W) ONE 4 ALL					G		Green			
			EFF			H		K		DD		I		J	
			CRI • LUMENOUTPUT			COLOR TEMP.		DRIVER		SUSP. CABLE		UPLIGHT PLEXI		DIFFUSER	
			LED866>85 CRI • 7640 Lm / 49,6 W			33000 K		0	incl./non dim	01	1,5 m	0	N.A.	1	Opal
								2	Dim 1-10 V	02	2,5 m			2	Prismatic
								3	Dali						



D-RABBIT


design van missinne for dark

Fur Metal

110-BB-CCC-DD-I



110-BB-8663-K-DD-0-J

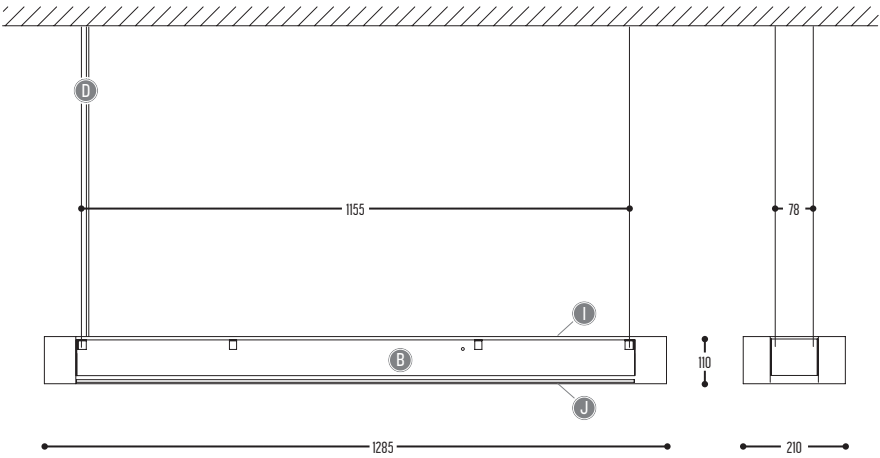

BB			CCC					DD		I			
MATERIAL			TYPE					SUSP. CABLE		UPLIGHT PLEXI			
44		White	128	G5		T16 (28 W) Non Dim		01	1,5 m	C		Clear	
45		Brown	154			T16 (54 W) Non Dim		02	2,5 m	R		Red	
46		Black	155			T16 (54 W) Dim 1-10 V				B		Blue	
			156			T16 (54 W) ONE 4 ALL				G		Green	






reddot design award
winner 2003


D2V2

design danny verlet for dark


D2V2

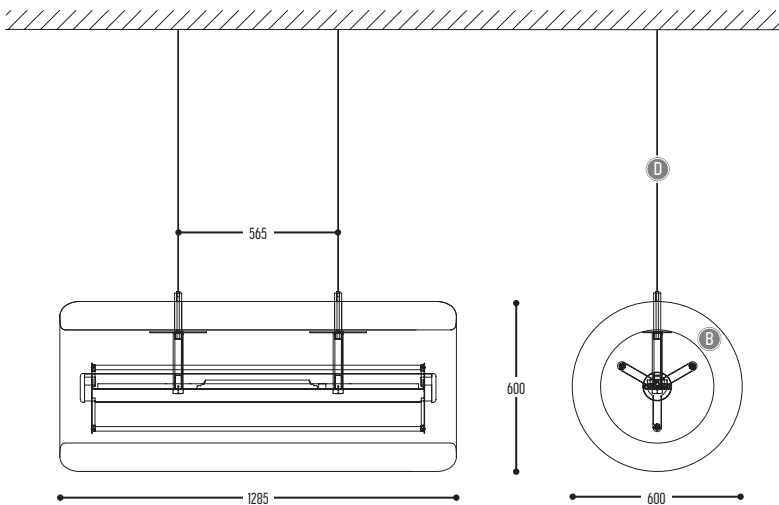


160-03-CCC-DD



D2V2 FLOOR

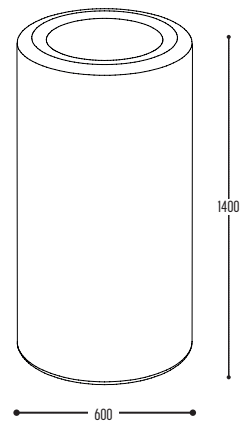




161-03-354-00



BB		CCC				DD	
BODY		TYPE				SUSP. CABLE	
03	White (translucent)	354	G5		T16 (54 W) Non Dim	02	2,5 m
		355			T16 (54 W) Dim 1-10 V	03	5 m
		356			T16 (54 W) ONE 4 ALL		




851-BB(B)-071-00
851-BB(B)-80500H-00-K



BB(B)					CCC								
COLORS					TYPE								
02		Black	104	Soft Green	071	G9		1x QT14 (MAX 50 W)					
03		White	105	Cream				1x TC-TSE (MAX 9 W)					
100		Chocolat	106	Blue									
101		Soft Pink	107	Yellow									
102		Soft Yellow	108	Green									
103		Soft Blue	109	Red									
					EFF		GG	H	K				
					CRI • LUMENOUTPUT		REFLECTOR	COLOR TEMP.	DRIVER				
					805	LED	>80 CRI • 1x 400 Lm / 700 mA / 4 W	00	N.A.	2	2700 K	0	incl./non dim
										3	3000 K	1	excl.
										4	4000 K		



1200-BB(B)-065-00-II
1200-BB(B)-80600H-00-K-II

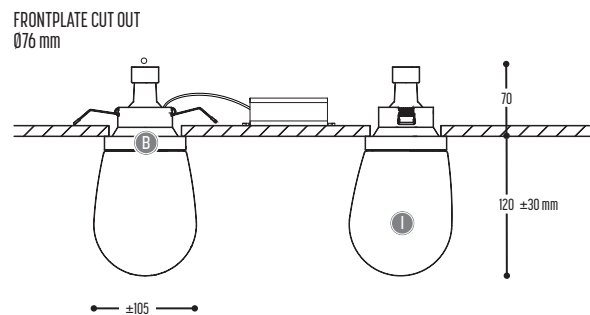


BB(B)			CCC					-		II		
COLORS			TYPE							GLASS		
02		Black	 230 V	065	GU10		QPAR51 (MAX 50 W)			00		Transparent
03		White								04		Red
112		Gold Paint								49		Amber
										58		Smoke
			EFF				H		K			
			CRI • LUMENOUTPUT				COLOR TEMP.		DRIVER EXTERN			
				806	>85 CRI • 600 Lm / 350 mA / 7,2 W		2	2700 K	0	incl./non dim		
							3	3000 K	1	excl.		
								2	Dim 1-10 V			
								3	Dali			








EDGAR ROUND S

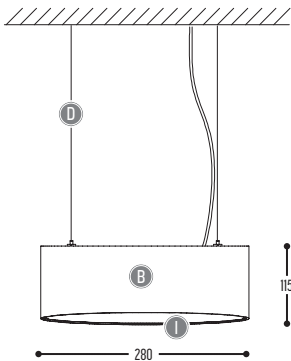



947-BB-81000H-DD-I-K



EDGAR SQUARE S


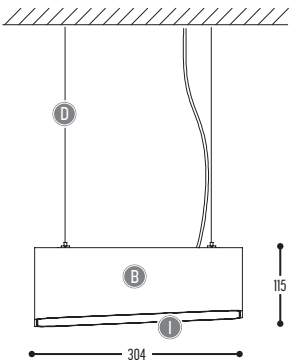


942-BB-80900H-DD-I-K



BB			EFF			GG		H		DD		I		K		
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		SUSP. CABLE		INSIDE COLOR		DRIVER		
02		Black	LED	809	>80 CRI • 1350 Lm / 350 mA / 11,3 W	00	N.A.	3	3000 K	01	1,5 m	B		Black	0	incl./non dim
03		White						4	4000 K	02	2,5 m	W		White	1	excl.
				810	>80 CRI • 1550 Lm / 500 mA / 13,8 W							G		Gold paint	2	Dim 1-10 V

EDGAR ROUND

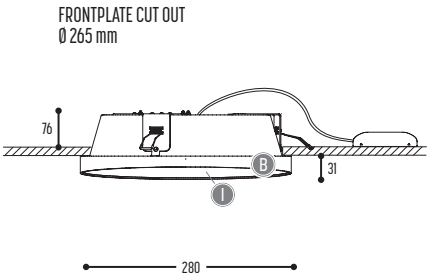



945-BB-81000H-00-I-K

Metal | PC

1 LAMPS | 2 kg | CE | 230 V | CC DRIVER

LED 0.3m | 960° | IP40 | 1

EDGAR ROUND BOX1



946-BB-81000H-00-I-K

Metal | PC

1 LAMPS | 4 kg | CE | 230 V | CC DRIVER



LED 0.3m | 960° | IP40 | 1

BB			EFF				GG		H		I			K		
COLORS			CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		INSIDE COLOR			DRIVER EXTERN		
02		Black	LED	810	>80 CRI • 1550 Lm / 500 mA / 13,8 W	00	N.A.	3	3000 K	B		Black	0	incl./non dim		
03		White						4	4000 K	W		White	1	excl.		
											G		Gold paint	2	Dim 1-10 V	
														3	Dali	

EDGAR SQUARE



FRONTPLATE CUT OUT
285 x 285 mm with rounded corners Ø25 mm

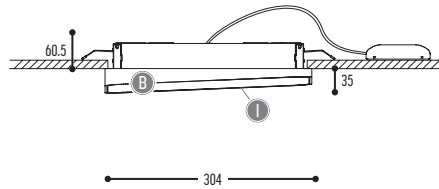

940-BB-80900H-00-I-K

Metal

PC

1 LAMPS

2 kg

CE

230 V

CC DRIVER

LED 0.3m



960°

IP40

White

Black

EDGAR SQUARE BOX1



941-BB-80900H-00-I-K

Metal

PC

1 LAMPS

4 kg

CE

230 V

CC DRIVER

LED 0.3m

960°


IP40

White

Black

BB			EFF			GG		H		I			K	
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR			DRIVER EXTERN	
02		Black	LED	809	>80 CRI • 1350 Lm / 350 mA / 11,3 W	00	N.A.	3	3000 K	B		Black	0	incl./non dim
03		White						4	4000 K	W		White	1	excl.
								G		Gold paint	2	Dim 1-10 V		
											3	Dali		

FOREVER 27

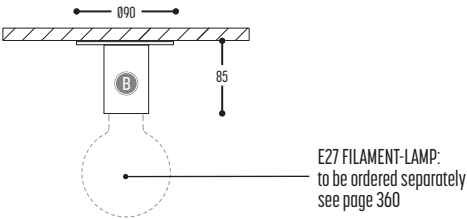

1237-BB(B)-001

Alu

LAMPS

0,2 kg

CE

230 V

0,3m

960°


IP20

BB(B)			CCC		
COLOR			TYPE		
02		Black	001	E27	 TCA-SE (MAX 12 W)
03		White			
101		Soft Pink			 LED (MAX 8 W)
103		Soft Blue			
104		Soft Green			
124		Kaki			

FOREVER 27

design dark studio for dark

FOREVER 27 SET1



E27 FILAMENT-LAMP:
to be ordered separately
see page 360

1239-00-001

Alu

1 LAMPS

0.2 kg

CE

230 V

960°

IP20

0.3 m

LED

BB(B)		CCC		
COLOR		TYPE		
00	N.A.	001	E27	TCA-SE (MAX 12 W)
				LED (MAX 8 W)



FRANJE

170-BB-001-00

Fabric

Metal

1 LAMPS

8 kg


CE

230 V

10.3m

850°

IP20

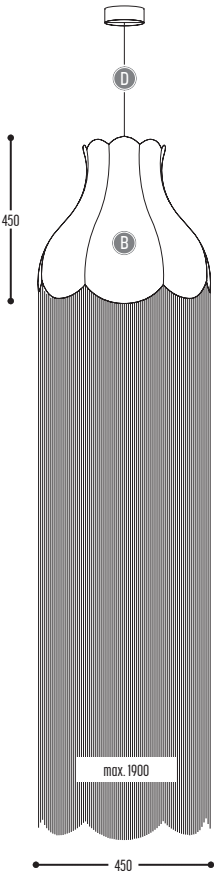

FRANJE FLOOR

170-BB-001-00

Fabric

Metal

1 LAMPS

8 kg


CE

230 V

10.3m

850°

IP20

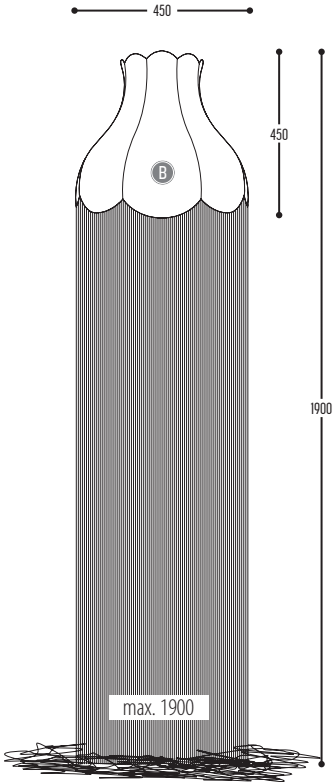


BB			CCC		
COLORS FABRIC flame retardant			TYPE		
02		Black	001	E27	 QA60 (MAX 42 W)
03		White			 TCA-SE (MAX 11 W)
					 LED (MAX 12 W)



GASTON

design carl hagerling for dark

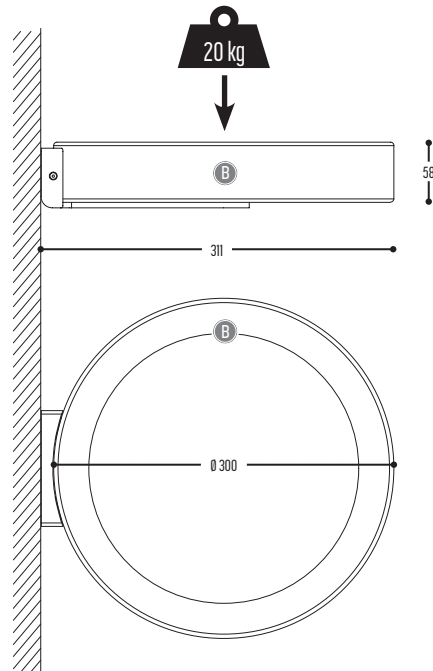

950-BB(B)-150000-WW


Metal | PC




BB(B)					CCCCC				HH		
COLORS					TYPE				COLOR TEMPERATURE		
02		Black	104		Soft Green	 24 V	150000	LED	2700 K / 15 W incl. non-dim driver	WW	Warm white 2700K
03		White	105		Cream						
100		Chocolat	106		Blue						
101		Soft Pink	107		Yellow						
102		Soft Yellow	108		Green						
103		Soft Blue	109		Red						
 On request											




HUITI 15 S




1879-BB-80634H-DD-I-K




HUITI 25 S

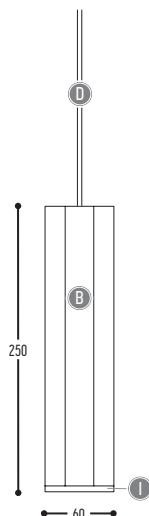


1882-BB-80634H-DD-I-K



HUITI 35 S




1885-BB-80634H-DD-I-K




BB(B)	EFF	GG	H	DD	I	K
COLORS	TYPE	REFLECTOR	COLOR TEMP	SUSP. CABLE	INSIDE COLOR	DRIVER
02	LED	34 34°	2 2700K	01 1,5 m	B	0 incl./non dim
03			3 3000K	02 2,5 m	W	1 excl.
101			4 4000K		G	2 Dim 1-10 V (extern)
103						3 Dali (extern)
104						4 Phase-cut
124						




HUITI 15




1870-BB-80634H-DD-I-K




HUITI 25




1873-BB-80634H-DD-I-K



HUITI 35

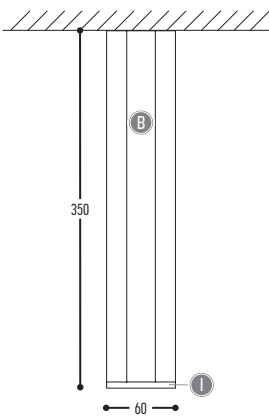



1876-BB-80634H-DD-I-K



BB(B)			EFF			GG		H		I			K	
COLORS			TYPE			REFLECTOR		COLOR TEMP		INSIDE COLOR			DRIVER	
02		Black	LED	806	>80 CRI • 600 Lm / 350 mA / 6,4 W	34	34°	2	2700K	B		Black	0	incl./non dim
03		White						3	3000K	W		White	1	excl.
101		Soft Pink						4	4000K	G		Gold paint	2	Dim 1-10 V (extern)
103		Soft Blue										3	Dali (extern)	
104		Soft Green										4	Phase-cut	
124		Kaki												



790-BB-135-00-00-J
790-BB-C(C)-00-0-C

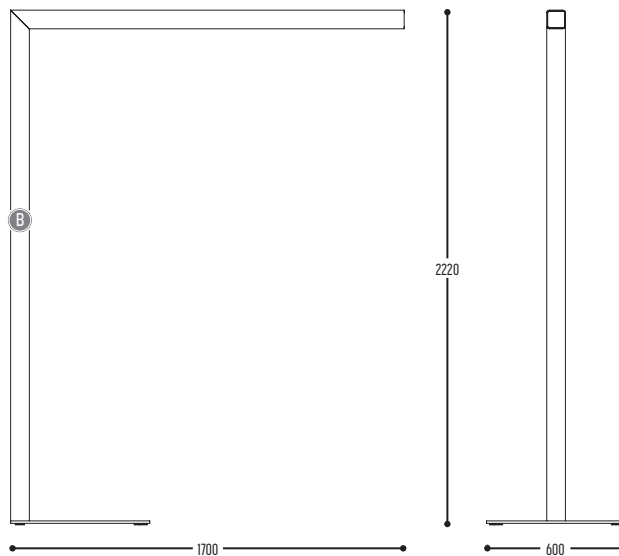


BB			CCC				HH		J	
COLOR BODY			TYPE				COLOR TEMPERATURE		DOWN TYPE	
02	Black		230 V	135	G5	T16 (35/49 W) Non Dim	00	N.A.	C	Opal cover
03	White								L	Bap 60°
10	Alu									
On request			CC				K		J	
			TYPE				DRIVER		DOWN TYPE	
			24 V	LED	3	>80 CRI • 9550 Lm / 62 W / 3000 K	0	incl. non dim	C	Opal cover
					13	>80 CRI • 5125 Lm / 31 W / 3000 K				



ICE

design anthony duffeleer for dark

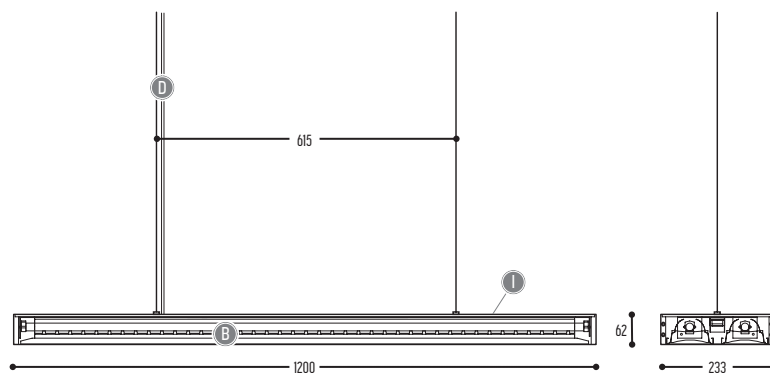

100-00-CCC-DD-I

PMMA Metal



BB		CCC			DD		I	
COLOR BODY		TYPE			SUSP. CABLE		UPLIGHT PLEXI	
00	Clear plexi	228	G5	T16 (28 W) Non Dim	01	1,5 m	C	Clear
		254		T16 (54 W) Non Dim	02	2,5 m	R	Red
		255		T16 (54 W) Dim 1-10 V			B	Blue
		256		T16 (54 W) ONE 4 ALL			G	Green




IJ-LAMP S



810-BB-042-DD

PMMA | Metal

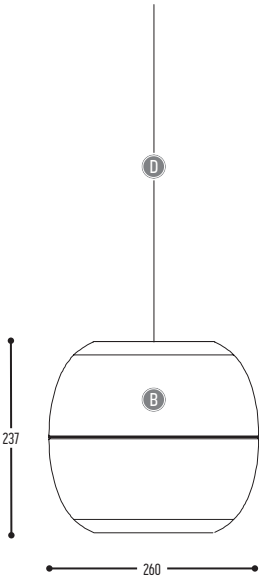


IJ-LAMP WALL



812-BB-042-00

PMMA | Metal



BB				CCC				DD	
COLORS				TYPE				SUSP. CABLE	
22			White / Green (color filter)	042	E27		TCA-SE (MAX 8 W)	01	1,5 m
23			White / Orange (color filter)					02	2,5 m
25			White / Yellow (color filter)				LED (MAX 8 W)		
26			White / Black						
28			White / Pink (color filter)						




IJ-LAMP METAL S



815-BB-042-DD

Alu | Metal

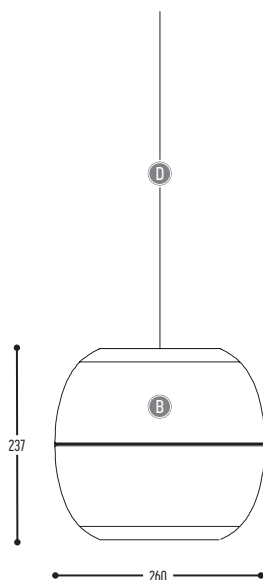


IJ-LAMP METAL WALL



817-BB(B)-042-00



Alu | Metal



BB(B)							CCC				DD						
COLORS						TYPE								SUSP. CABLE			
02		Black	104		Soft Green	042	E27		TCA-SE (MAX 11 W)	01	1,5 m						
03		White	105		Cream					02	2,5 m						
57		Polished Alu	106		Blue												
69		Copper Glossy	107		Yellow												
100		Chocolat	108		Green												
101		Soft Pink	109		Red												
102		Soft Yellow	110		Brass												
103		Soft Blue	 On request														




1375-BB-90600H-I-K

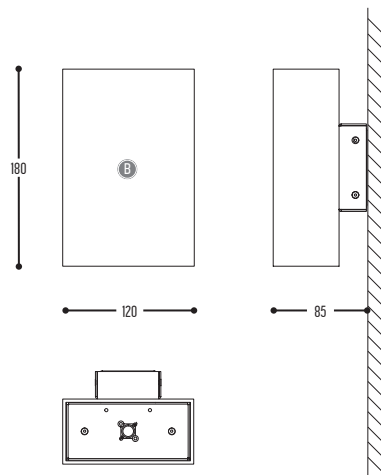

BB(B)			EFF			GG		H		I			K	
COLORS			TYPE			REFLECTOR		COLOR TEMP		INSIDE COLOR			DRIVER	
02		Black	LED	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	00	N.A.	2	2700K	B		Black	0	incl./non dim
03		White						3	3000K	W		White	1	excl.
112		Gold						4	4000K	G		Gold paint	2	Dim 1-10 V (extern)
													3	Dali (extern)
													4	Phase-cut



LA CAGE

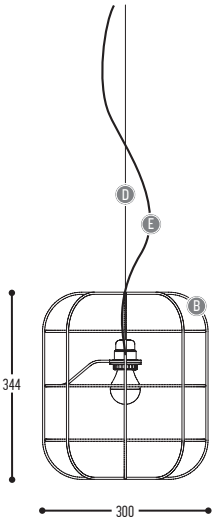

600-BB(B)-005-DD-EE

Metal

LAMPS

11,5 kg

CE

230 V

0,3m


960°

IP20

BB(B)			CCC			DD		EE		
COLORS			TYPE			SUSP. CABLE		SUSP. KIT		
02		Black	005		0045 (MAX 28 W)	01	1,5 m	02		Black
03		White				02	2,5 m	03		White
101		Soft Pink			TCA-SE P45 (MAX 7 W)			04		Pink
103		Soft Blue								
104		Soft Green								
124		Kaki			LED (MAX 7 W)					



LA CAGE DIVA

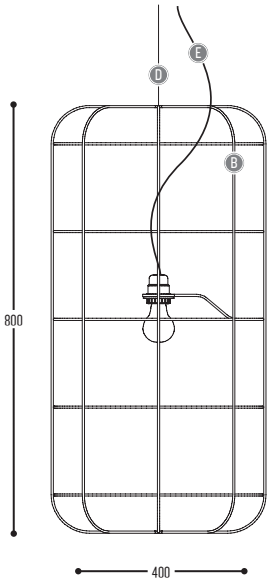


602-BB(B)-001-DD-EE

Metal

1 LAMPS 2 kg CE 230 V 0,3m 960° IP20

LA CAGE GROSSA

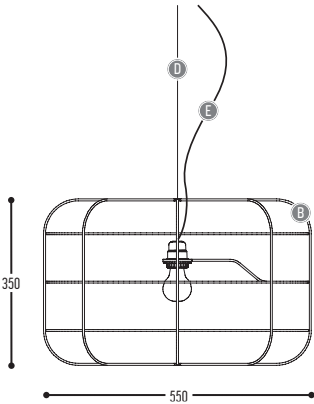

603-BB(B)-001-DD-EE

Metal

1 LAMPS 2 kg CE 230 V 0,3m 960° IP20

BB(B)			CCC			DD		EE				
COLORS			TYPE			SUSP. CABLE		SUSP. KIT				
02		Black	001	E27		1x OA60 (MAX 42 W)		01	1,5 m	02		Black
03		White				02		2,5 m	03		White	
101		Soft Pink				1x LED (MAX 12 W)				04		Pink
103		Soft Blue										
104		Soft Green										
124		Kaki										




L-HOP


design danny verlet for dark




L-HOP 1




1310-BB(B)-300000-WW



L-HOP 2

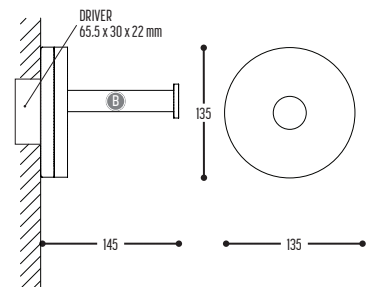


1311-BB(B)-300000-WW



BB(B)						CCC				HH	
COLORS						TYPE				COLOR TEMPERATURE	
02		Black	105		Cream	 24 V	300000	LED	3000 K / 3 W incl. non-dim driver	WW	Warm white 3000K
03		White	106		Blue						
100		Chocolat	107		Yellow						
101		Soft Pink	108		Green						
102		Soft Yellow	109		Red						
103		Soft Blue	112		Gold Paint						
104		Soft Green									



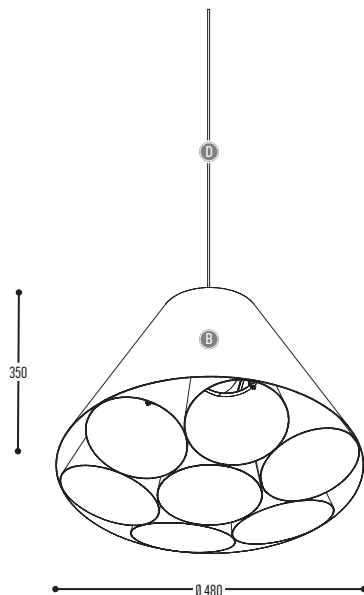


750-BB-001-DD

Alu




BB		CCC			DD	
COLORS		TYPE			SUSP. CABLE	
02	Black (inside gold)	001	E27	TCG-SE / Globe (MAX 15 W)	01	1,5 m
03	White (inside gold)			LED / Globe (MAX 11 W)	02	2,5 m

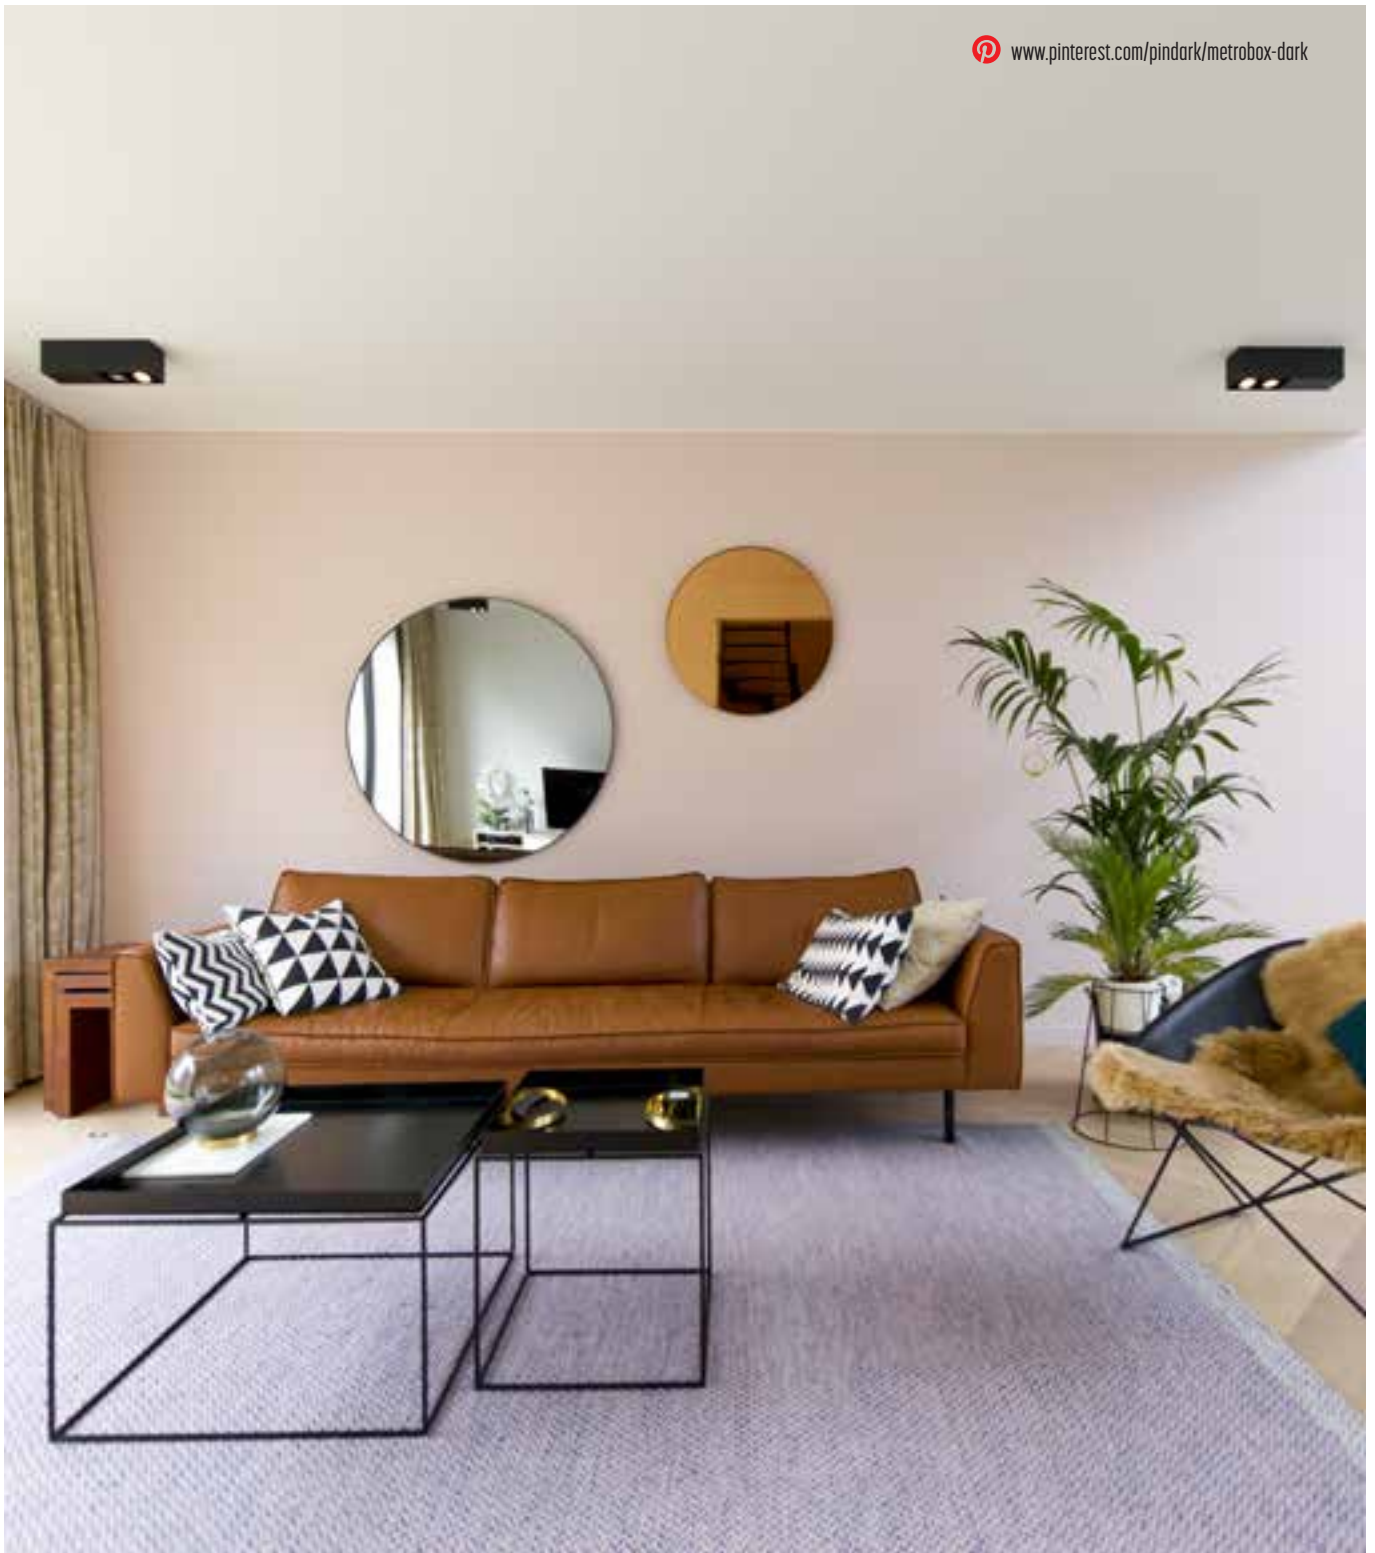

METROBOX

design dark studio for dark

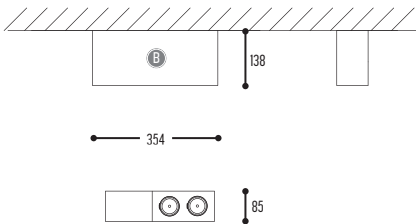

1215-BB(B)-065-00
1215-BB(B)-806GGH-00-K

PC | Alu



BB(B)			CCC									
COLORS			TYPE 2									
02		Black	 230 V	065			QPAR51 (MAX 50 W)					
03		White										
112		Gold paint										
68		Copper paint										
124		Kaki										
			EFF				GG		H		K	
			CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		DRIVER	
			LED	806	>85 CRI • 2x 1000 Lm / 350 mA / 9 W		22	22°	2	2700 K	0	Incl./non dim
							34	34°	3	3000 K	2	Dim 1-10 V
54	54°						3	Dali				




METROFFICE

design anthony boelaert for dark

METROFFICE 1

1210-BB-C(C)-K-J-1-I
1210-BB-C(C)-K-J-2GGH-I


PC | Alu

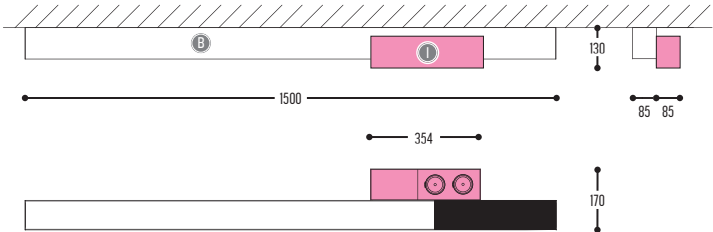



METROFFICE 2

1211-BB-C(C)-K-J-1-I
1211-BB-C(C)-K-J-2GGH-I

PC | Alu

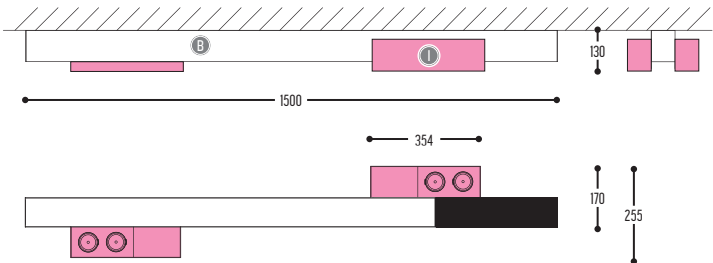

BB		C(C)			K		J		M						I			
COLORS			TYPE 1			DRIVER		DIFFUSER		TYPE 2						COLORS		
02		Black	3	LED	>80 CRI • 7640 Lm / 49,6 W / 3000K	0	incl./non dim	0	opal		1	GU10		QPAR51 (MAX 50 W)	B		Black	
03		White				2	Dim 1-10 V	1	prismatic						W		White	
			13	LED	>80 CRI • 4100 Lm / 24,8 W / 3000K	3	Dali								G		Gold point	
															C		Copper point	
									E			GG		H				
									CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.				
LED	2	>85 CRI • 2x 1000 Lm / 350 mA / 9 W	22°		2	2700 K												
			34°		3	3000 K												
			54°															



BB			C(C)			
COLORS			TYPE 1			
02		Black	3	LED	Metroffice 7	>80 CRI • 15280 Lm / 99,2 W / 3000K
03		White			Metroffice 8	>80 CRI • 17190 Lm / 111,6 W / 3000K
					Metroffice 9	>80 CRI • 19100 Lm / 123,8 W / 3000K
					Metroffice 10	>80 CRI • 21000 Lm / 136,1 W / 3000K
					Metroffice 11	>80 CRI • 22920 Lm / 148,4 W / 3000K
					Metroffice 12	>80 CRI • 24830 Lm / 160,7 W / 3000K
					Metroffice 13	>80 CRI • 26740 Lm / 173 W / 3000K
			13	LED	Metroffice 7	>80 CRI • 8200 Lm / 49,6 W / 3000K
					Metroffice 8	>80 CRI • 9225 Lm / 55,8 W / 3000K
					Metroffice 9	>80 CRI • 10250 Lm / 62 W / 3000K
					Metroffice 10	>80 CRI • 11275 Lm / 68,2 W / 3000K
					Metroffice 11	>80 CRI • 12300 Lm / 74,7 W / 3000K
					Metroffice 12	>80 CRI • 13325 Lm / 80,6 W / 3000K
					Metroffice 13	>80 CRI • 15375 Lm / 86,8 W / 3000K


METROFFICE 7

1320-BB-C(C)-K-J-1-I
1320-BB-C(C)-K-J-2GGH-I




METROFFICE 8

1321-BB-C(C)-K-J-1-I
1321-BB-C(C)-K-J-2GGH-I



METROFFICE 9

1322-BB-C(C)-K-J-1-I
1322-BB-C(C)-K-J-2GGH-I




METROFFICE 10

1323-BB-C(C)-K-J-1-I
1323-BB-C(C)-K-J-2GGH-I




METROFFICE 11

1324-BB-C(C)-K-J-1-I
1324-BB-C(C)-K-J-2GGH-I




METROFFICE 12

1325-BB-C(C)-K-J-1-I
1325-BB-C(C)-K-J-2GGH-I



METROFFICE 13

1326-BB-C(C)-K-J-1-I
1326-BB-C(C)-K-J-2GGH-I




	K		J		M							I			
	DRIVER		DIFFUSER		TYPE 2							COLORS			
	0	incl./non dim	0	opal		1	GU10		QPAR51 (MAX 50 W)				B		Black
	2	Dim 1-10 V	1	prismatic									W		White
	3	Dali											G		Gold point
													C		Copper point
							E		GG		H				
							CRI • LUMENOUTPUT		REFLECTOR		COLOR TEMP.				
	LED	2	>85 CRI • 2x1000 Lm / 350 mA / 9 W					22	22°	2	2700 K				
								34	34°	3	3000 K				
								54	54°						



METROLINE

design dark studio for dark



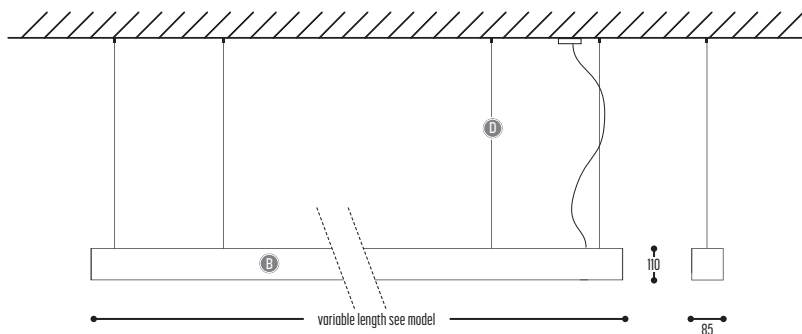

METROLINE 1 S

1850-BB-C(C)-DD-K-J



METROLINE 5 S

1851-BB-C(C)-DD-K-J




METROLINE 7 S

1852-BB-C(C)-DD-K-J




METROLINE 8 S

1853-BB-C(C)-DD-K-J



METROLINE 9 S

1854-BB-C(C)-DD-K-J




METROLINE 10 S

1855-BB-C(C)-DD-K-J




METROLINE 11 S

1856-BB-C(C)-DD-K-J




METROLINE 12 S

1857-BB-C(C)-DD-K-J



METROLINE 13 S

1858-BB-C(C)-DD-K-J



BB			C(C)			DD		K		J		
COLORS			TYPE 1			SUSP. CABLE		DRIVER		DIFFUSER		
02		Black	3	LED	Metroline (box) 1 S	>80CRI • 7640 Lm / 49,6 W / 3000 K	01	1,5 m	0	Incl./non dim	0	opal
03		White			Metroline (box) 5 S	>80CRI • 11460 Lm / 74,4 W / 3000 K	02	2,5 m	2	Dim 1-10 V	1	prismatic
					Metroline (box) 7 S	>80CRI • 15280 Lm / 99,2 W / 3000 K						
					Metroline (box) 8 S	>80CRI • 17190 Lm / 111,6 W / 3000 K						
					Metroline (box) 9 S	>80CRI • 19100 Lm / 123,8 W / 3000 K						
					Metroline (box) 10 S	>80CRI • 21000 Lm / 136,1 W / 3000 K						
					Metroline (box) 11 S	>80CRI • 22920 Lm / 148,4 W / 3000 K						
					Metroline (box) 12 S	>80CRI • 24830 Lm / 160,7 W / 3000 K						
					Metroline (box) 13 S	>80CRI • 26740 Lm / 173 W / 3000 K						
			13	LED	Metroline (box) 1 S	>80CRI • 4100 Lm / 24,8 W / 3000 K						
					Metroline (box) 5 S	>80CRI • 6150 Lm / 37,2 W / 3000 K						
					Metroline (box) 7 S	>80CRI • 8200 Lm / 49,6 W / 3000 K						
					Metroline (box) 8 S	>80CRI • 9225 Lm / 55,8 W / 3000 K						
					Metroline (box) 9 S	>80CRI • 10250 Lm / 62 W / 3000 K						
					Metroline (box) 10 S	>80CRI • 11275 Lm / 68,2 W / 3000 K						
					Metroline (box) 11 S	>80CRI • 12300 Lm / 74,7 W / 3000 K						
			Metroline (box) 12 S	>80CRI • 13325 Lm / 80,6 W / 3000 K								
			Metroline (box) 13 S	>80CRI • 15375 Lm / 86,8 W / 3000 K								

METROLINE BOX 1 S

2160-BB-C(C)-DD-K-J-1

2160-BB-C(C)-DD-K-J-2GGH



METROLINE BOX 5 S

2161-BB-C(C)-DD-K-J-1

2161-BB-C(C)-DD-K-J-2GGH



METROLINE BOX 7 S

2162-BB-C(C)-DD-K-J-1


2162-BB-C(C)-DD-K-J-2GGH



METROLINE BOX 8 S

2163-BB-C(C)-DD-K-J-1


2163-BB-C(C)-DD-K-J-2GGH



METROLINE BOX 9 S

2164-BB-C(C)-DD-K-J-1


2164-BB-C(C)-DD-K-J-2GGH



METROLINE BOX 10 S

2165-BB-C(C)-DD-K-J-1


2165-BB-C(C)-DD-K-J-2GGH



METROLINE BOX 11 S

2166-BB-C(C)-DD-K-J-1

2166-BB-C(C)-DD-K-J-2GGH



METROLINE BOX 12 S

2167-BB-C(C)-DD-K-J-1

2167-BB-C(C)-DD-K-J-2GGH



M									
TYPE 2									
		1	GU10		QPAR51 (MAX 50 W)				
	230 V								
	E				GG			H	
	CRI • LUMENOUTPUT				REFLECTOR			COLOR TEMP.	
	LED	2	>85 CRI • 2x1000 Lm / 350 mA / 9 W		22	22°	2	2700 K	
					34	34°	3	3000 K	
					54	54°			



METROLINE BOX 1

2150-BB-C(C)-K-J-1
2150-BB-C(C)-K-J-2GGH



METROLINE BOX 5

2151-BB-C(C)-K-J-1
2151-BB-C(C)-K-J-2GGH




METROLINE BOX 7

2152-BB-C(C)-K-J-1
2152-BB-C(C)-K-J-2GGH




METROLINE BOX 8

2153-BB-C(C)-K-J-1
2153-BB-C(C)-K-J-2GGH




METROLINE BOX 9

2154-BB-C(C)-K-J-1
2154-BB-C(C)-K-J-2GGH




METROLINE BOX 10

2155-BB-C(C)-K-J-1
2155-BB-C(C)-K-J-2GGH



METROLINE BOX 11

2156-BB-C(C)-K-J-1
2156-BB-C(C)-K-J-2GGH



METROLINE BOX 12

2157-BB-C(C)-K-J-1
2157-BB-C(C)-K-J-2GGH



M									
TYPE 2									
 230 V 1 GU10  QPAR51 (MAX 50 W)									
E					GG			H	
CRI • LUMENOUTPUT					REFLECTOR			COLOR TEMP.	
LED	2	>85 CRI • 2x1000 Lm / 350 mA / 9 W			22	22°		2	2700 K
					34	34°		3	3000 K
					54	54°			



METROLINE SYSTEM

design dark studio for dark

PROFILE 1400-BB

	BB	
	COLORS	
	02	Black
	03	White

ENDPLATE 1403-BB

	BB	
	COLORS	
	02	Black
	03	White

LED MODULE high lumen 1406-BB-C-D

	BB			C		D	
	LENGTH			COLOR TEMP.		DRIVER	
	01	280 mm	>80CRI • 1910 Lm / 12,4 W	3	3000K	0	incl./non dim
	02	560 mm	>80CRI • 3820 Lm / 24,8 W	4	4000K	1	excl.
	03	1120 mm	>80CRI • 7640 Lm / 49,6 W			2	Dim 1-10 V
						3	Dali

LED MODULE low lumen 1406-BB-IC-D

	BB			C		D	
	LENGTH			COLOR TEMP.		DRIVER	
	01	280 mm	>80CRI • 1025 Lm / 6,2 W	3	3000K	0	incl./non dim
	02	560 mm	>80CRI • 2050 Lm / 12,4 W	4	4000K	1	excl.
	03	1120 mm	>80CRI • 4100 Lm / 24,8 W			2	Dim 1-10 V
						3	Dali

COVER PROFILE 1401-BB

	max. 5,95 m	
	BB	
	COLORS	
	02	Black
	03	White

DIFFUSER 1402-B

	max. 5,95 m	
	B	
	TYPE	
	0	Opal
	1	Prismatic*

* prismatic diffuser:
UGR < 19
According to the new
European standard UGR < 19
as the maximum permissible
value for offices.

SUSPENSION CABLE KIT 1404-BB

	BB	
	SUSPENSION CABLE	
	01	1,5 m
	02	2,5 m

max. 1,5 m distance between 2 suspension cables

SUSPENSION POWER SUPPLY KIT 1405-BB-DD

	BB		DD	
	COLORS		POWER CABLE	
	01	Black	01	1,5 m
	02	White	02	2,5 m
			11	1,5 m
			12	2,5 m

3P cable
5P cable
dimmable

PC | Alu



ENDLESS POSSIBILITIES

CALL THE DARK COWBOYS




M SPOT BOX
1411-BB-2GGH-K

	BB		E			GG		H		K	
	COLOR		CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP		DRIVER	
	02	Black	LED	2	>85 CRI • 2x 1000 Lm / 350 mA / 9 W	22	22°	2	2700K	0	incl./non dim
	03	White				34	34°	3	3000K	1	excl.
						54	54°			2	Dim 1-10 V
										3	Dali

M FOREVER 27
1413-BB

	BB	
	COLOR	
	02	Black
	03	White

M COOLFIN S
1414-BB-EFFGGH-(I)-K


	BB		EFF			GG		H		(I) optional		K	
	COLOR		CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP		INSIDE COLOR		DRIVER	
	02	Black	LED	810	>85 CRI • 1x 1300 Lm / 1x700 mA / 9,5 W	40	40°	2	2700K	G	Gold	0	incl./non dim
	03	White				60	60°	3	3000K			2	Dim 1-10 V
								4	4000K			3	Dali

SENSORING
1435

	Motion detection
--	------------------

SR SENSORING
1436

	Sensor ready system daylight control motion detection Wireless mesh control
--	--

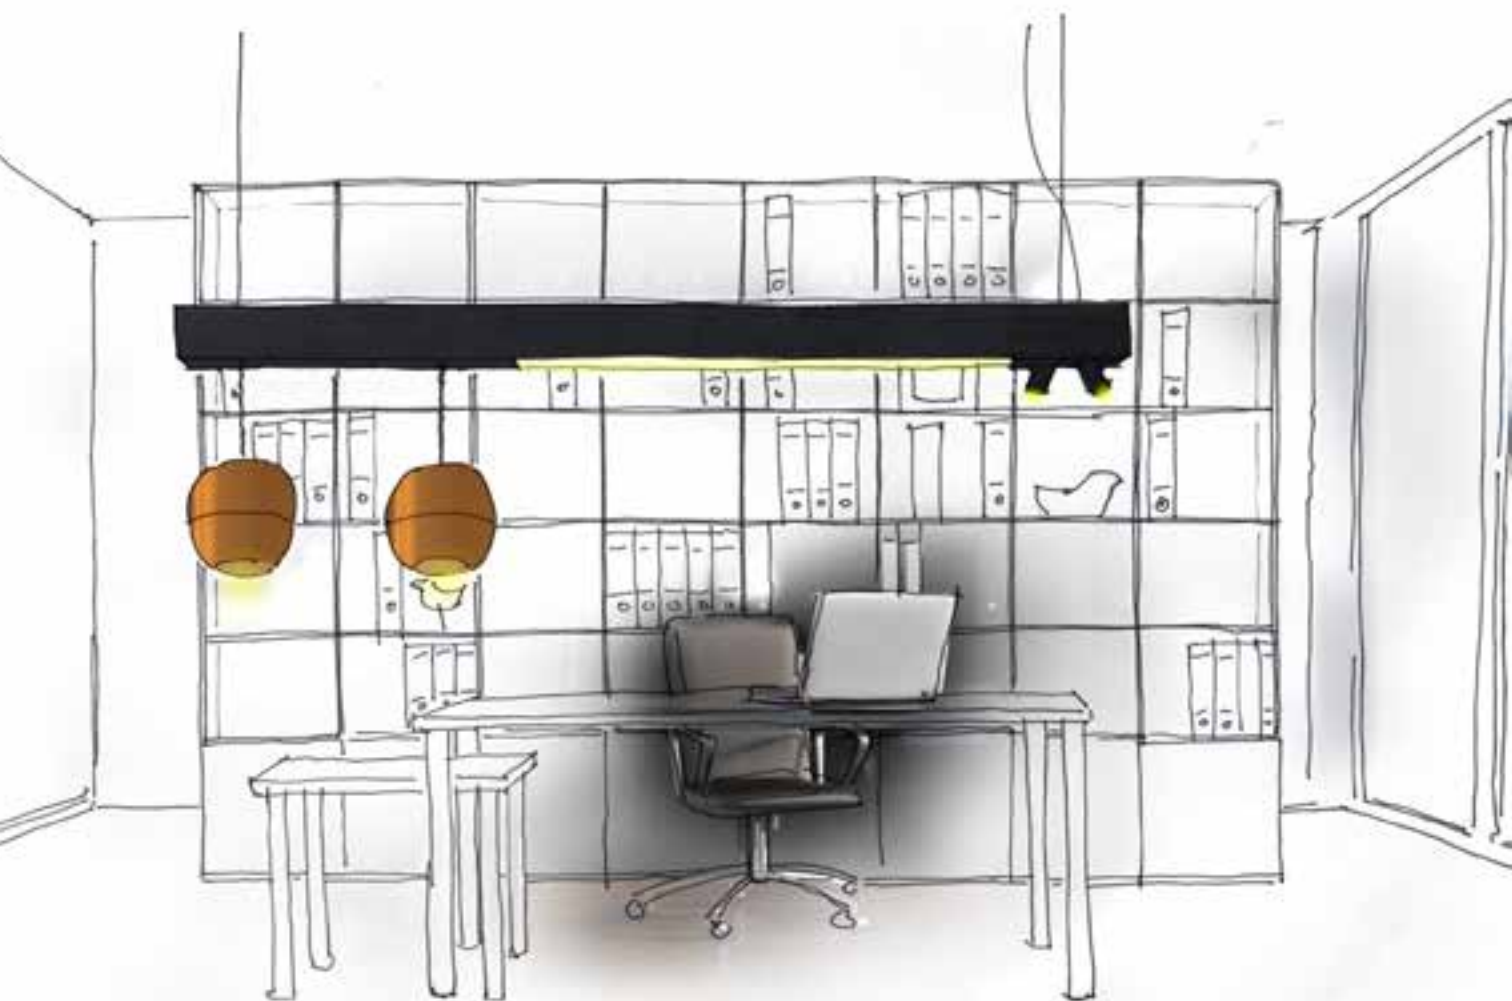


ENDLESS POSSIBILITIES


CALL THE DARK COWBOYS

CONNECTION SETS


1410

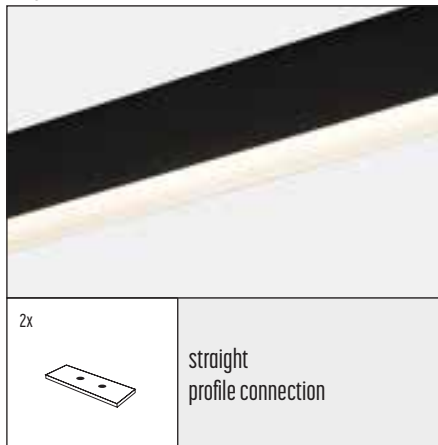

1420

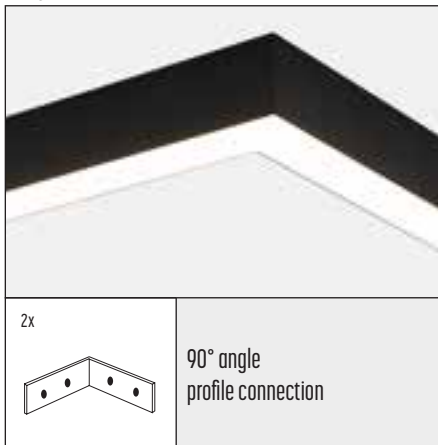

1430

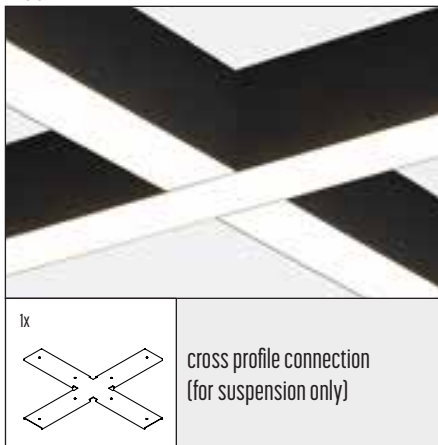

METROLINE SYSTEM

SUSPENSION PROFILE < CEILING PROFILE



HUMAN CENTRIC LIGHTING

bespoke

Human centric lighting or biorhythmic lighting simulates daylight over the entire day - from clear, blue morning skies, right through to the glow of sunset. It supports our natural bio rhythm and has a dynamic influence on our emotions on a daily basis. It controls human processes and even influences our internal clock.


This approach accurates working and improves quality in industry and production environments. It enchances wellbeing and creativity in office spaces. Human perception and sensing is stimulated by light, so retail presentations are put in the daylight situation and the time of day are reflected on customers personality. In nursing homes and hospitals, the human centric does not only activate people during the daytime, it also has a positive effect on health and clearly improved night-time sleep patterns.

Dark is offering 2 different technologies based on color spectrum and functionalities:



SENSOR READY & EMERGENCY UNITS

bespoke

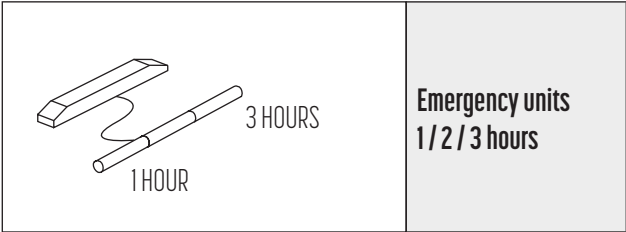


Metroline profiles are configurable with Philips EasyAir wireless sensors and emergency units. LED lighting already brings considerable energy savings. Sensor ready wireless sensors into luminaires take the savings to an even higher level. Sensors enable presence and sunlight detection, which when used in combination, can generate savings of up to 50%.

Emergency solutions are designed to secure light in case the normal mains voltage is failing. In emergency case the driver immediately switches over to battery mode to light-up vitalobjects such as escape routes.

BLUETOOTH WIRELESS control

bespoke

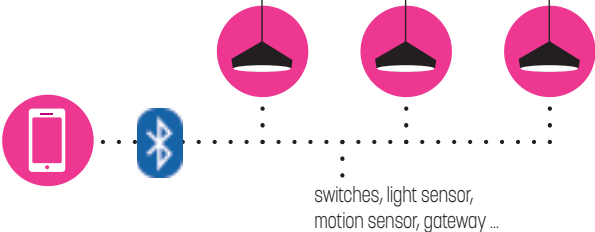


Nowadays it is impossible to imagine daily-life without wireless technology. Bluetooth low energy is implemented in all modern smartphones, tablets, watches and has not yet seen his end. Casambi collaborates with all the leading luminaire manufacturers to implement bluetooth in lighting fixtures and switches. Dark is one of these.


The Casambi technology provides a mesh network where all the intelligence of the system is replicated in every node and, in such a way, creates a system with no single points of failure. You can control a large number of fixtures from any point in the mesh network with the free casambi app.

HOW TO ORDER

HOW TO ORDER A BLACK PROFILE OF 7000 mm :

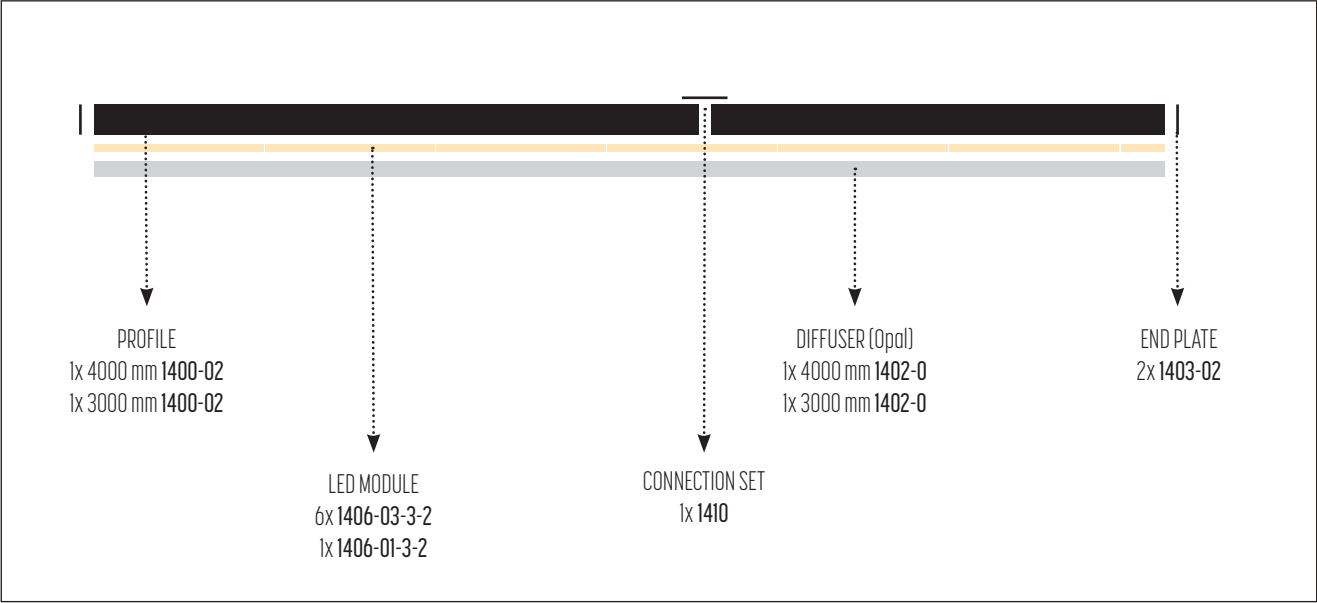

HOW TO ORDER A WHITE PROFILE OF 2540 mm suspension:

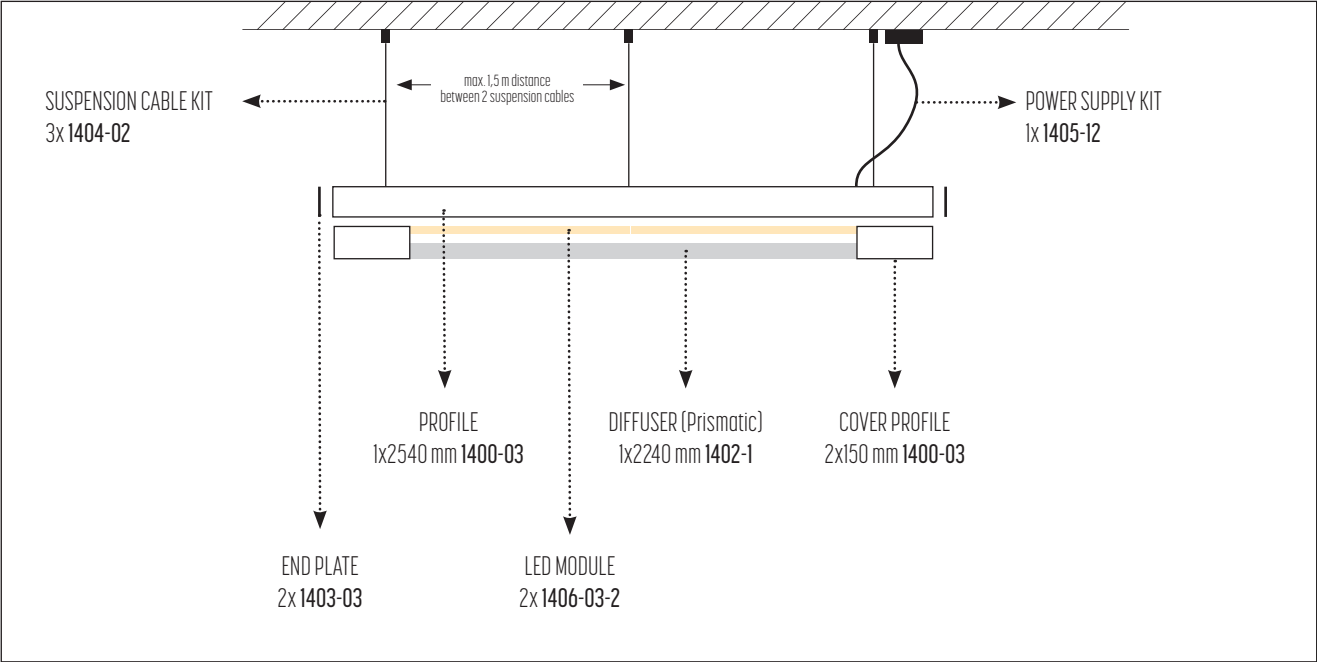






reddot design award
winner 2017

MR.BEAM 1 S

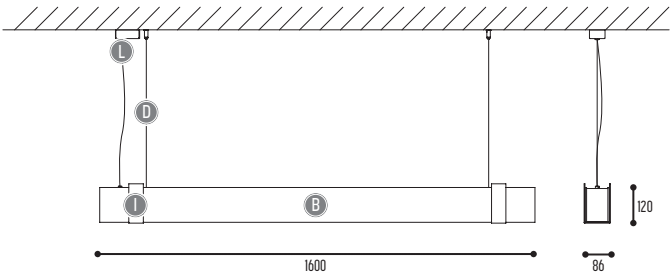

1301-BBB-17H-DD-II(I)-LL

Alu

Metal

Wood

2 LAMPS

6 kg

CE

230 V

0.3m

650°

IP20

incl. non-dim driver


house icon

mounting icon

BBB			FF			H		DD		II(I)			LL		
MATERIALS			CRI • LUMENOUTPUT			COLOR TEMP.		SUSP. CABLE		COLORS			SUSP. KIT		
117		Oak stained black	LED	17	>80 CRI • 34 W incl. non-dim driver	2	2700 K	01	1,5 m	02		Black	02		Black
						3	3000 K	02	2,5 m	03		White	03		White
118		Oak natural								110		Brass			
131		Oak stained white													
 On request															




MR.BEAM 2 S

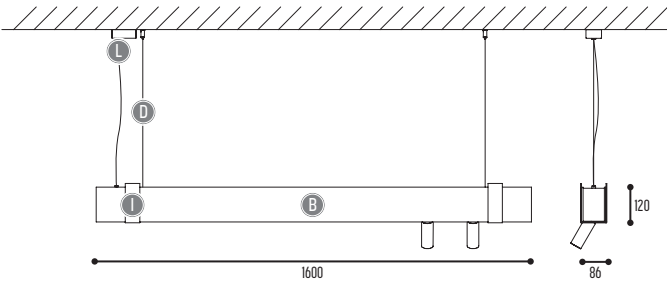

1302-BBB-13H-DD-II(I)-LL-T

Alu	Metal	Wood
-----	-------	------





BBB			FF			H		DD		II(I)			LL		T			
MATERIALS			CRI • LUMENOUTPUT			COLOR TEMP.		SUSP. CABLE		COLORS		SUSP. KIT		CRI • LUMENOUTPUT				
117		Oak stained black	LED	13	>80 CRI • 26 W incl. non-dim driver	2	2700 K	01	1,5 m	02		Black	02		Black	LED	T	>90 CRI • 600 Lm / 350 mA / 6 W Reflector 54° Incl driver / non dim
						3	3000 K	02	2,5 m	03		White	03		White			
118		Oak natural							110		Brass							
131		Oak stained white																
 On request																		



MR.BEAM 3 S


1303-BBB-DD-II(I)-LL-T

Alu	Metal	Wood
-----	-------	------

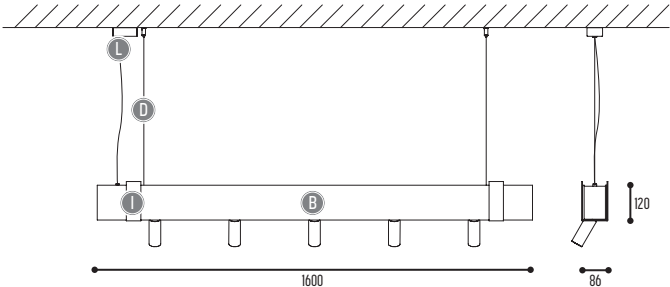


BBB			DD		II(I)			LL			T		
MATERIALS			SUSP. CABLE		COLORS			SUSP. KIT			CRI • LUMENOUTPUT		
117		Oak stained black	01	1,5 m	02		Black	02		Black	LED	T	>90 CRI • 600 Lm / 350 mA / 6 W Reflector 54° Color temp 2700 K Incl driver /non dim
			02	2,5 m	03			03					
118		Oak natural			110		Brass						
131													
 On request													

1304-BBB-34H-DD-II(I)-LL

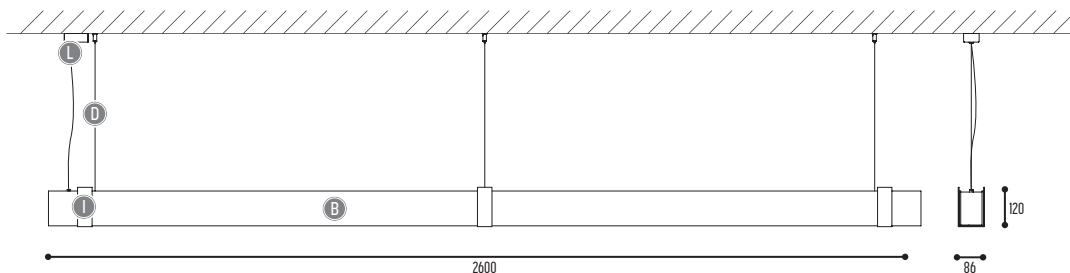


1305-BBB-26H-DD-II(I)-LL-T

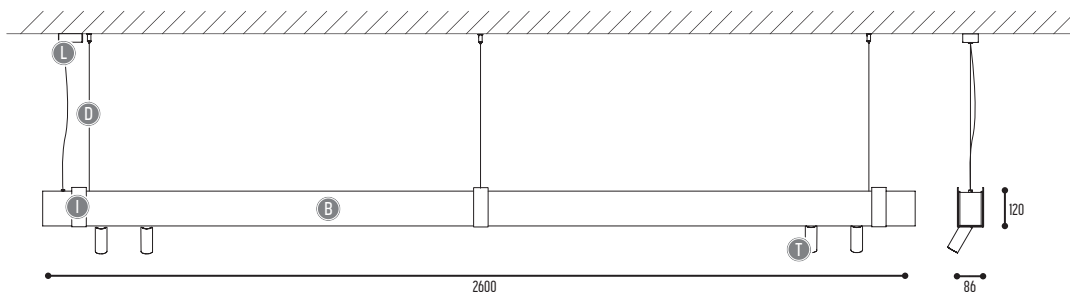



NINZA S

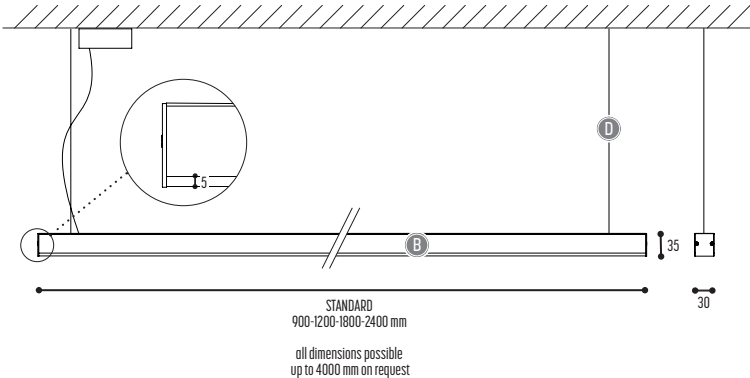

1796-BB-FFGH-DD-K-NN(N)


AluPC

CE


BB			FF			G		H		DD		K		NN(N)			
COLORS			CRI • LUMENOUTPUT			DOWN TYPE		COLOR TEMP.		SUSP. CABLE		DRIVER		LENGTH			
02		Black	LED	09	>80 CRI • 9,6 W/m	P	plexi	2	2700 K	01	1,5 m	0	incl./non dim	90	900 mm		
03		White		14	>80 CRI • 14,4 W/m			3	3000 K			02	2,5 m	2	Dim 1-10 V (extern)	120	1200 mm
 On request		28		>80 CRI • 28,8 W/m	4			4000 K					3	Dali (extern)	180	1800 mm	
												4	Phase cut (extern)	240	2400 mm		
														On request			



NINZA C - IP20

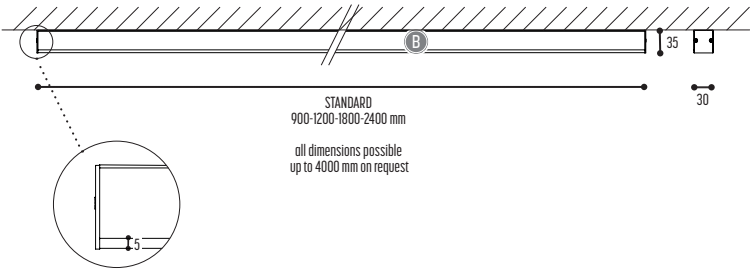


1797-BB-FFGH-DD-K-NN(N)



BB			EFF			G		H		K		NN(N)	
COLORS			CRI • LUMENOUTPUT			DOWN TYPE		COLOR TEMP.		DRIVER		LENGTH	
02		Black	LED	09	9,6 W/m	P	plexi	2	2700 K	0	incl./non dim	90	900 mm
03		White		14	14,4 W/m			3	3000 K	2	Dim 1-10 V (extern)	120	1200 mm
 On request		28		28,8 W/m	4			4000 K	3	Dali (extern)	180	1800 mm	
									4	Phase cut (extern)	240	2400 mm	
											On request		

NINZA C - IP65/IP67

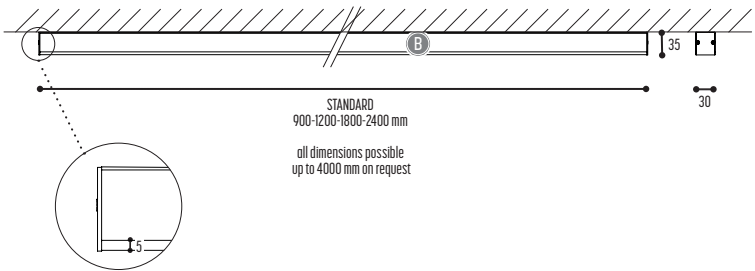

1800-BB-FFGH-K-NN(N)

Alu

Resin

PC

IP65

SEALED + PLEXI

CV DRIVER

960°

1803-BB-FFGH-K-NN(N)

Alu

Resin

IP67

SEALED


CV DRIVER

960°

BB		EFF			G	H	K	NN(N)				
COLORS		CRI • LUMENOUTPUT			DOWN TYPE		COLOR TEMP.		DRIVER (extern)		LENGTH	
02	 Black	LED	09	9,6 W/m	P	plexi	2	2700 K	0	incl./non dim	90	900 mm
03	 White		14	14,4 W/m			3	3000 K	2	Dim 1-10 V (extern)	120	1200 mm
 On request			28	28,8 W/m			4	4000 K	3	Dali (extern)	180	1800 mm
									4	Phase cut (extern)	240	2400 mm
											On request	



NO COPY

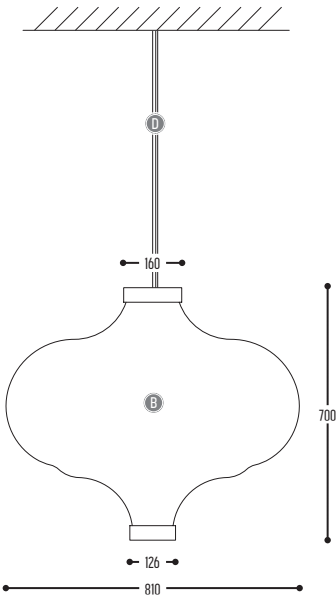

230-03-CCC-DD

PE Metal




NO COPY SNAKE




231-03-CCC-DD

PE Metal

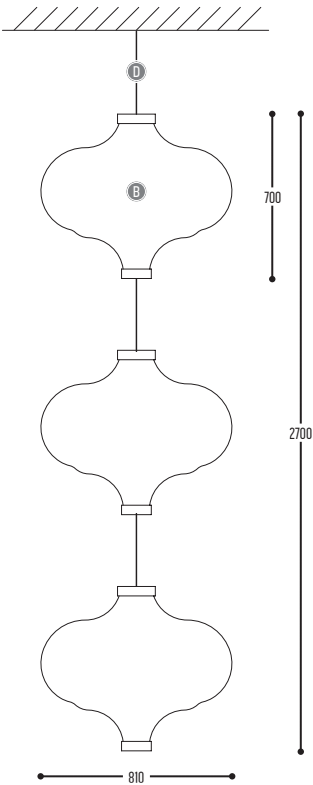

BB		CCC				DD	
BODY		TYPE				SUSP. CABLE	
03	White (translucent)	324	G5		T16 (24 W) Non Dim	02	2,5 m
		325			T16 (24 W) Dim 1-10 V	03	5 m
		326			T16 (24 W) ONE 4 ALL		
		510	LED		Warm white - stand alone		
		500			RGB - stand alone (dmx, dali on request)		

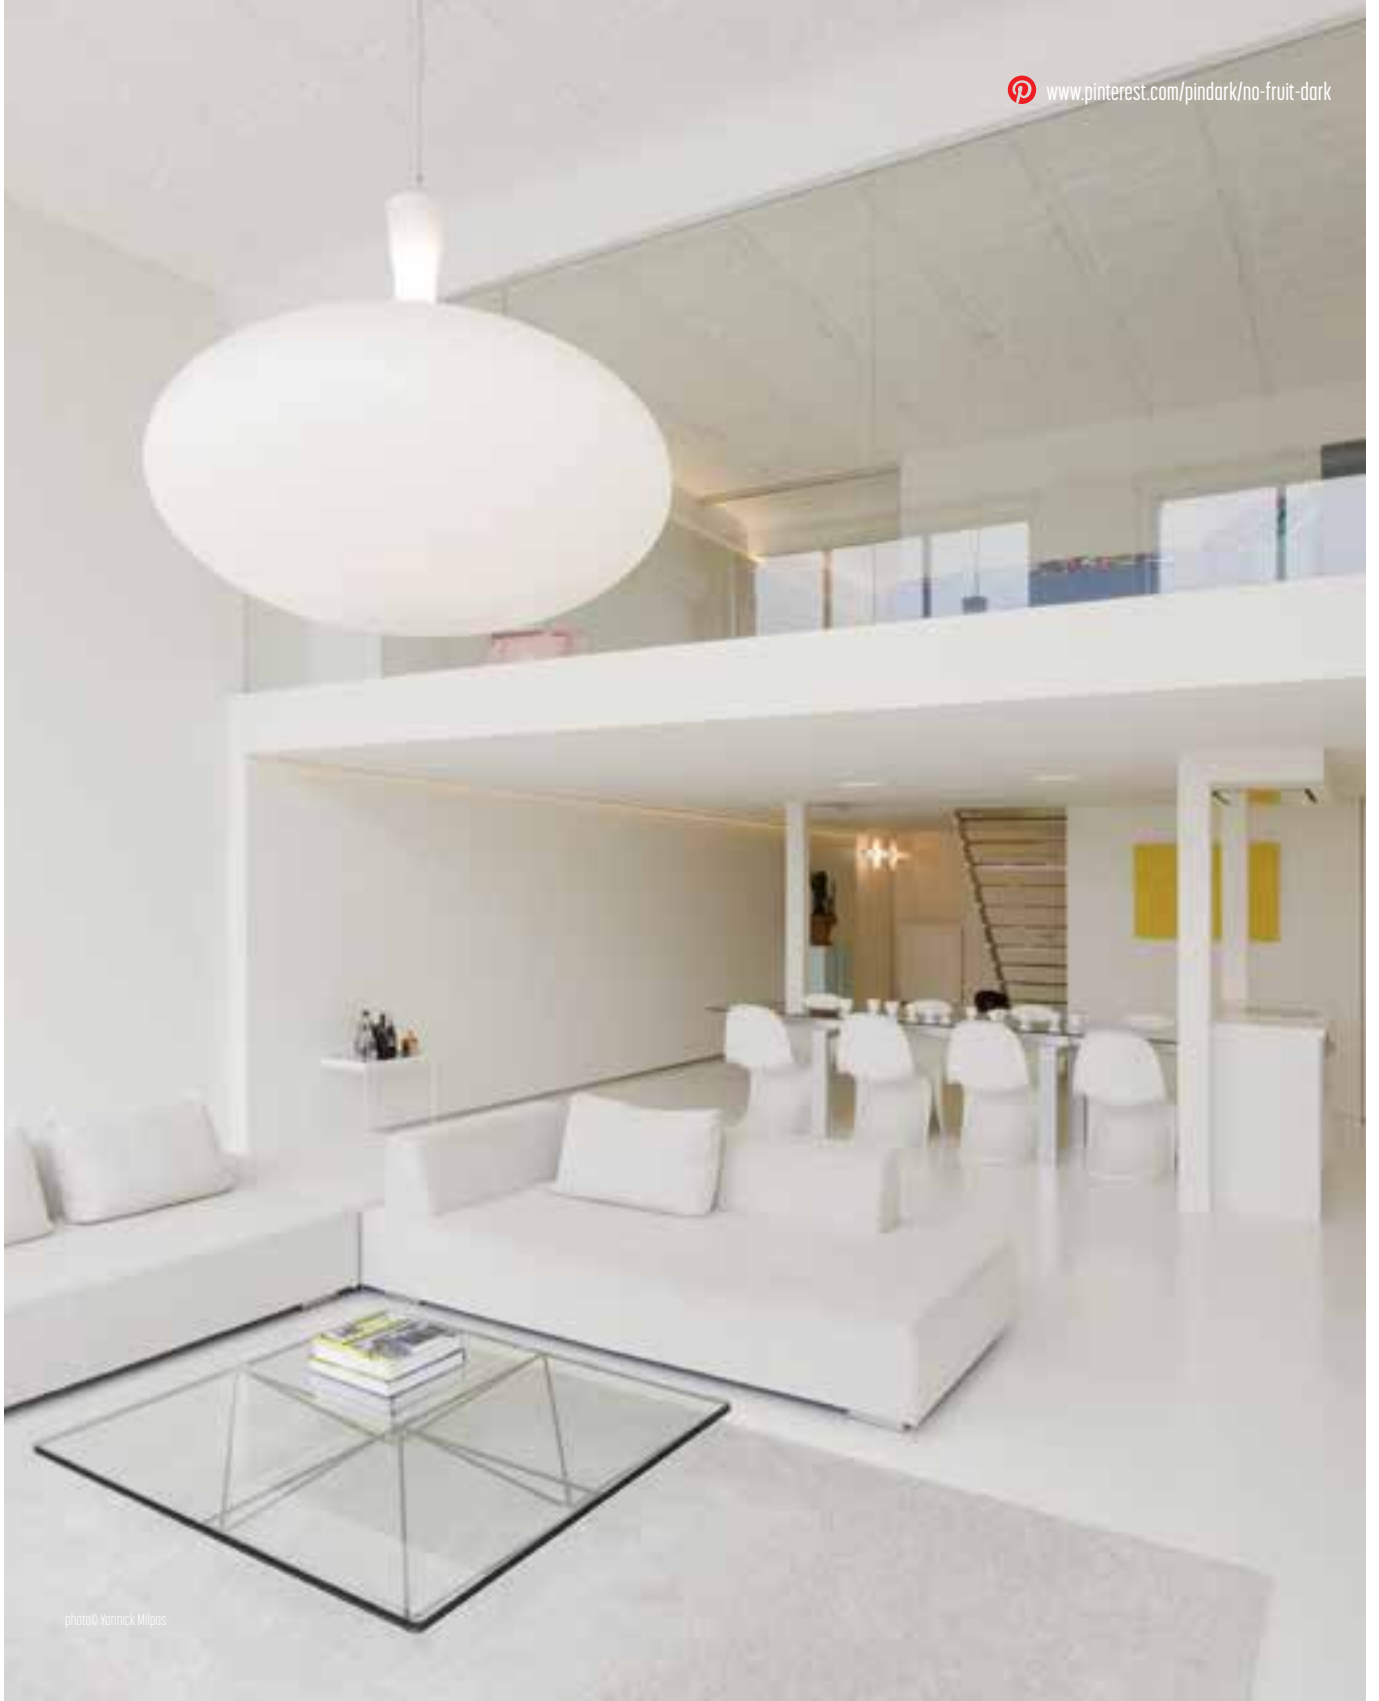

NO FRUIT


design anthony duffeleer for dark



DESIGN **PLUS**
2004

150-03-CCC-DD

PE | Metal

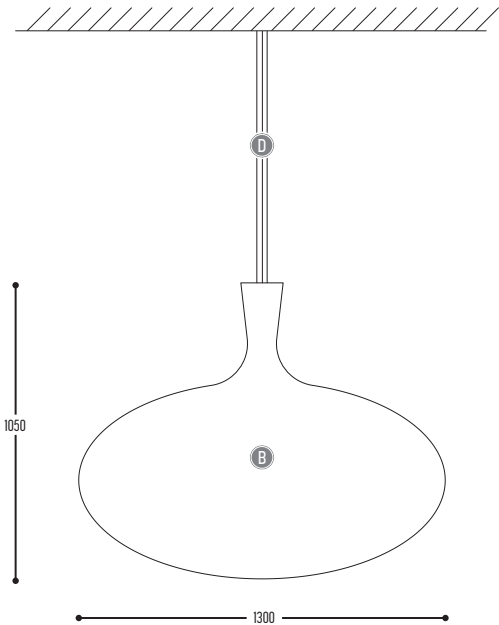

BB		CCC				DD	
BODY		TYPE				SUSP. CABLE	
03	White (translucent)	339	G5		3x T16 (39 W) Non Dim	02	2,5 m
		340			3x T16 (39 W) Dim 1-10 V	03	5 m
		341			3x T16 (39 W) ONE 4 ALL		
		510	LED	Warm white - stand alone			
		500		RGB - stand alone (dmx, dali on request)			




OBLIVION

design arne quinze for dark




240-03-CCC-DD


PE | Metal

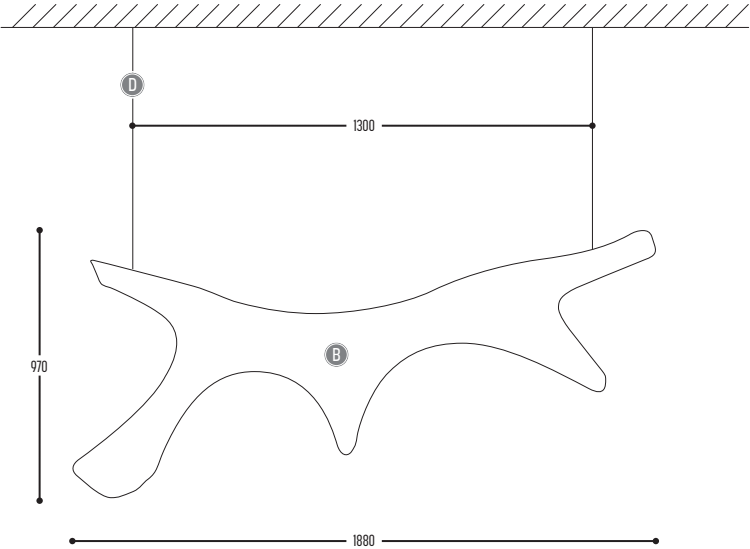

BB		CCC				DD	
BODY		TYPE				SUSP. CABLE	
03	White (translucent)	339	G5		T16 (39 W) Non Dim	02	2,5 m
		340			T16 (39 W) Dim 1-10 V	02	5 m
		341			T16 (39 W) ONE 4 ALL		
		510	LED		Warm white - stand alone		
		500			RGB - stand alone (dmx, dali on request)		

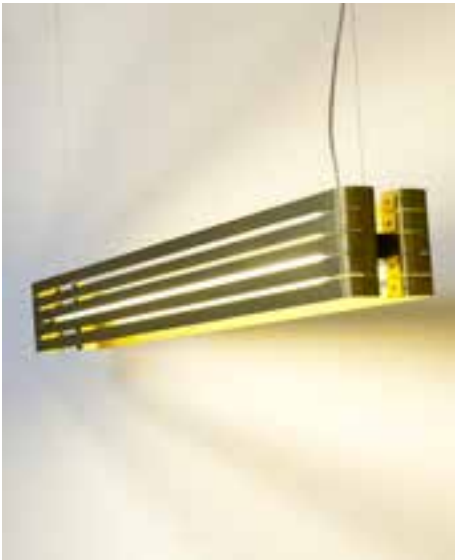

ORGUE

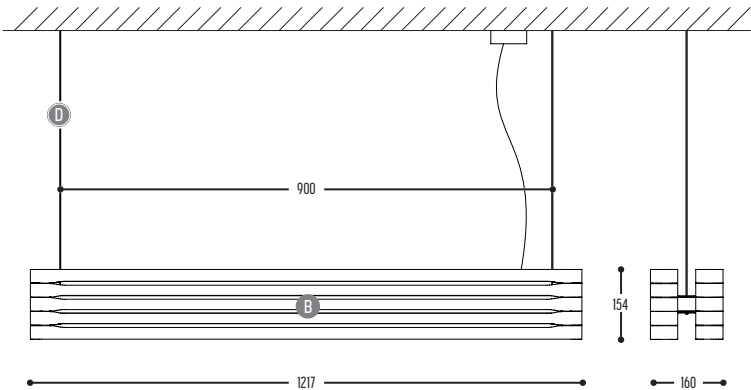

1363-BB(B)-8663-DD-K

Alu

Metal

1 LAMPS

5 kg

CE

230 V

0,5m


960°

IP20

BB(B)						EFF				H		DD		K	
COLORS						CRI • LUMENOUTPUT				COLOR TEMP.		SUSP. CABLE		DRIVER	
02		Black	105		Cream	 24 V	LED	866	>85 CRI • 1x 7640 Lm / 49,6 W	3	3000 K	01	1,5 m	0	incl./non dim
03		White	106		Blue							02	2,5 m	2	Dim 1-10 V
100		Chocolat	107		Yellow									3	Dali
101		Soft Pink	108		Green										
102		Soft Yellow	109		Red										
103		Soft Blue	110		Brass										
104		Soft Green	112		Gold paint										



ORGUE WALLO1

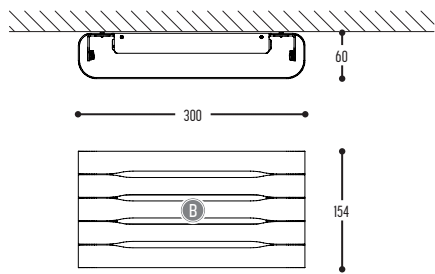

1360-BB(B)-EFF00H-00-K

Alu Metal




BB(B)				EFF			H		K	
COLORS				CRI • LUMEN OUTPUT			COLOR TEMP.		DRIVER	
02		Black	105		Cream	LED 805 >85 CRI • 450 Lm / 700mA / 6 W	2	2700 K	0	incl./non dim
03		White	106		Blue		3	3000 K	1	excl.
100		Chocolat	107		Yellow		4	4000 K	4	Phase cut
101		Soft Pink	108		Green					
102		Soft Yellow	109		Red					
103		Soft Blue	110		Brass					
104		Soft Green	112		Gold point					

PAINT-IT 2



Fire resistant



870-BB(B)-CCC-00
870-BB(B)-EFFGGH-00-K

GFRP

Metal

2 LAMPS

1,5 kg

CE

230 V

CC DRIVER

960°

IP40


365°

25°

PAINT-IT 3



Fire resistant



871-BB(B)-CCC-00
871-BB(B)-EFFGGH-00-K

GFRP

Metal

3 LAMPS

2,2 kg

CE

230 V

CC DRIVER

960°

IP40

365°


25°

BB(B)						CCC									
COLORS						TYPE									
00						 230 V	065	GU10	 QPAR51 (MAX 50 W)						
02		Black	104		Soft Green		085	GU5,3-GX5,3	 QR-CB-C51 (MAX 35 W) incl. transfo						
03		White	105		Cream										
100		Chocolat	106		Blue										
101		Soft Pink	107		Yellow										
102		Soft Yellow	108		Green										
103		Soft Blue	109		Red										
						EFF		GG	H	K					
						CRI • LUMENOUTPUT		REFLECTOR	COLOR TEMP.	DRIVER					
						LED	806	>85 CRI • 600 Lm / 350 mA / 7,2 W		22	22°	2	2700 K	0	incl./non dim
										34	34°	3	3000 K	1	excl.
										54	54°	4	4000 K	2	Dim 1-10 V

PAINT-IT WALL



Fire resistant

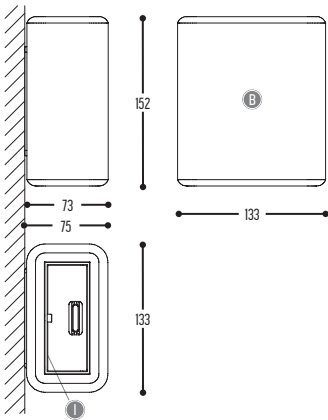

874-BB(B)-80900H-00-I-K


GFRP Metal



BB(B)					EFF			H		I		K		
COLORS					CRI • LUMENOUTPUT			COLOR TEMP.		INSIDE COLOR		DRIVER		
00					LED	809	>85 CRI • 2x 450 Lm / 700mA / 6 W	3	3000 K	G		Gold	0	incl./non dim
02		Black	104		Soft Green				4	4000 K			1	excl.
03		White	105		Cream				2	Dim 1-10 V (extern)				
100		Chocolat	106		Blue						3	Dali (extern)		
101		Soft Pink	107		Yellow									
102		Soft Yellow	108		Green									
103		Soft Blue	109		Red									



PAROQ 1



550-BB(B)-001-00

Alu




PAROQ

design oldsjö hultgren för dansk



PAROQ 2

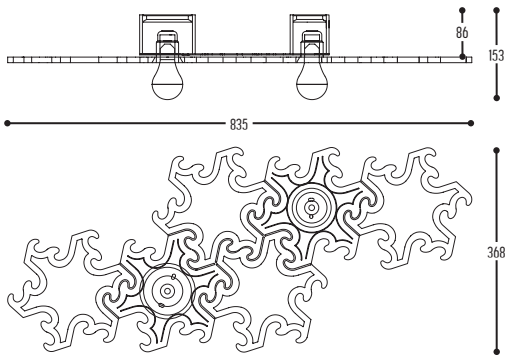


551-BB(B)-001-00

Alu



PAROQ 3

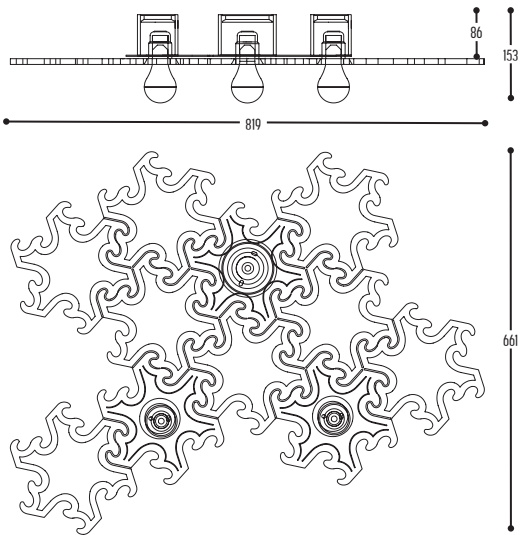

552-BB(B)-001-00


Alu



BB(B)						CCC			
COLOR						TYPE			
02		Black	104		Soft Green	001	E27		A60-CS-G (MAX 60 W) / Silver or Gold
03		White	105		Cream				TCA 60-CS (MAX 9 W) / Silver
100		Chocolat	106		Blue				LED CS (MAX 7 W) / Silver
101		Soft Pink	107		Yellow				
102		Soft Yellow	108		Green				
103		Soft Blue	109		Red				



PETROL

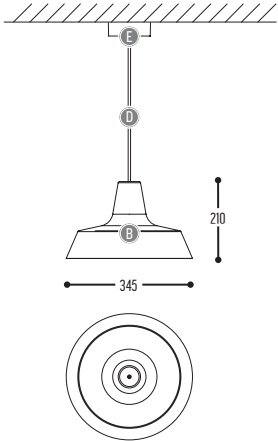

1834-BB(B)-001-DD-EE

Metal

LAMPS

1 kg

CE

230 V

0.5m


LED

0.3m

960°

IP20

PETROL WALL

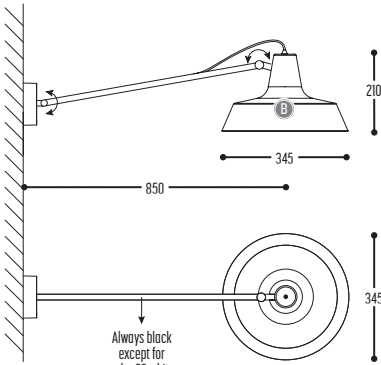

1835-BB(B)-001

Aluminium | Metal

LAMPS

1 kg

CE

230 V

0.5m

LED

0.3m

960°

IP20

BB(B)			CCC			DD		EE	
COLORS			TYPE			SUSP. CABLE		SUSP. KIT	
02		Black	001	E27	TCA-SE (MAX 12 W)	01	1,5 m	02	Black
03		White			LED (MAX 12 W)	02	2,5 m	03	White
101		Soft Pink							
103		Soft Blue							
104		Soft Green							
124		Kaki							
127		Rusty							




POC

design johanna lindgreen & helen högbeeg for daek



DESIGN **PLUS**
2006

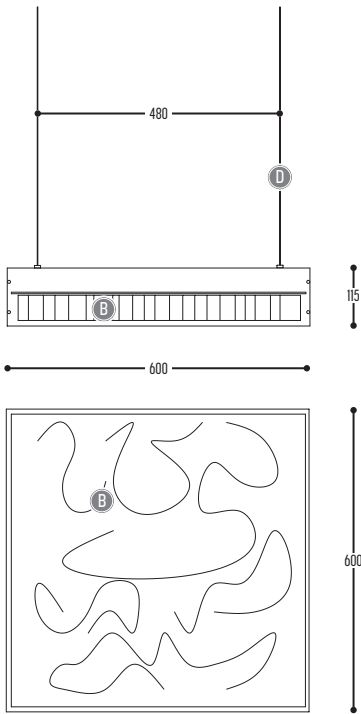

270-BB-3-DD

PMMA | Metal





BB				C			DD	
BODY - FILLING				TYPE			SUSP. CABLE	
03			Clear plexi - filling white fabrics	3	LED	>80 CRI • 6500 Lm / 49,5W / 3000K	01	1,5 m
04			Clear plexi - filling red strings				02	2,5 m
05			Clear plexi - filling green strings					
11			Clear plexi - filling silver fabrics					



ROND-L


design detail concept for dark

ROND-L 1 S


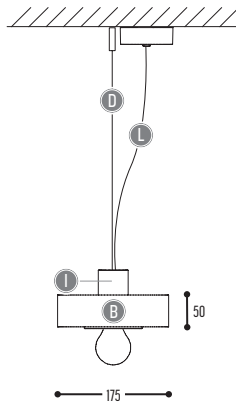


E27 FILAMENT-LAMP:
to be ordered separately
see page 360


1245-BB(B)-001-DD-II(I)-LL





ROND-L 2 S

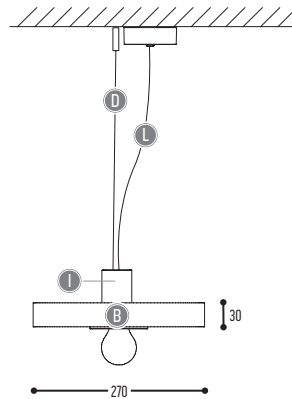


1246-BB(B)-001-DD-II(I)-LL



ROND-L 3 S

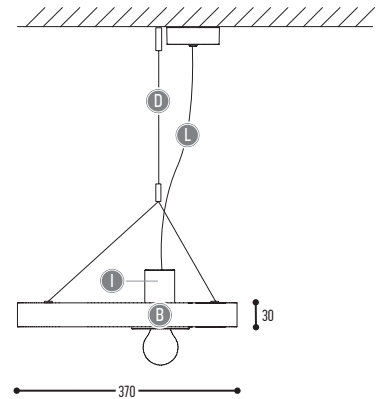



1247-BB(B)-001-DD-II(I)-LL



AAAA	BB(B)		CCC		DD	II(I)		LL	
MODEL	MATERIALS		TYPE		SUSP. CABLE	COLORS		SUSP. KIT	
1245 1246 1247	43	Concrete	001	E27	TCA-SE (MAX 12 W) LED (MAX 8 W)	01	Black	02	Black
	67	Cork				02	White	03	White
	115	Multiplex Pine				68	Copper point	04	Pink
	117	Oak stained black				103	Soft Blue		
	118	Oak natural				104	Soft Green		
	132	Driftwood				112	Gold point		
1245 1246	120	Marble White				124	Kaki		
	121	Marble Green							
	133	Marble Grey							



ROND-L 1





E27 FILAMENT-LAMP:
to be ordered separately
see page 360

1248-BB(B)-001-II(I)

Alu | see choice below



ROND-L 2





1249-BB(B)-001-II(I)

Alu | see choice below



ROND-L 3

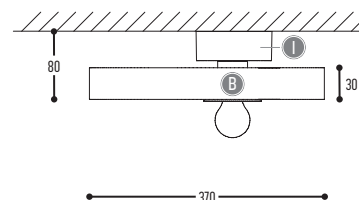

1250-BB(B)-001-II(I)


Alu | see choice below




AAAA	BB(B)		CCC				II(I)	
MODEL	MATERIALS		TYPE				COLORS	
1248 1249 1250	43	Concrete	001	E27	TCA-SE (MAX 12 W)	LED (MAX 8 W)	02	Black
	67	Cork					03	White
	115	Multiplex Pine					68	Copper paint
	117	Oak stained black					103	Soft Blue
	118	Oak natural					104	Soft Green
	132	Driftwood					112	Gold paint
1248 1249	120	Marble White					124	Kaki
	121	Marble Green						
	133	Marble Grey						




SANGHA 30

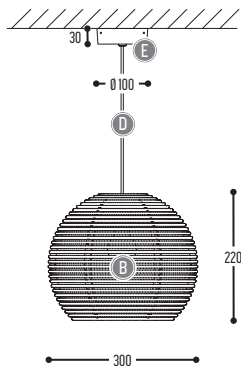


1010-1-BB(B)-001-DD-EE




SANGHA 40

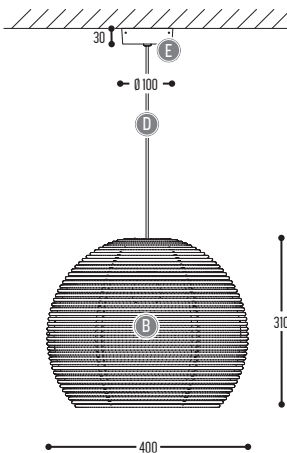


1010-2-BB(B)-001-DD-EE



SANGHA 50

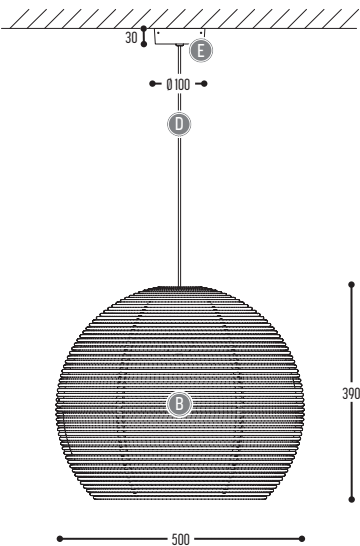


1010-3-BB(B)-001-DD-EE




BB(B)					CCC			DD		EE					
COLORS					TYPE			SUSP. CABLE		SUSP. KIT					
02		Black	104		Soft Green	001	E27		QA60 (MAX 42 W)	01	1,5 m	02		Black	
03		White	105		Cream					02	2,5 m	03		White	
37		Natural	106		Blue										
100		Chocolat	107		Yellow						TC-TSE (MAX 11 W)				
101		Soft Pink	108		Green										
102		Soft Yellow	109		Red										
103		Soft Blue													




SANGHA 80

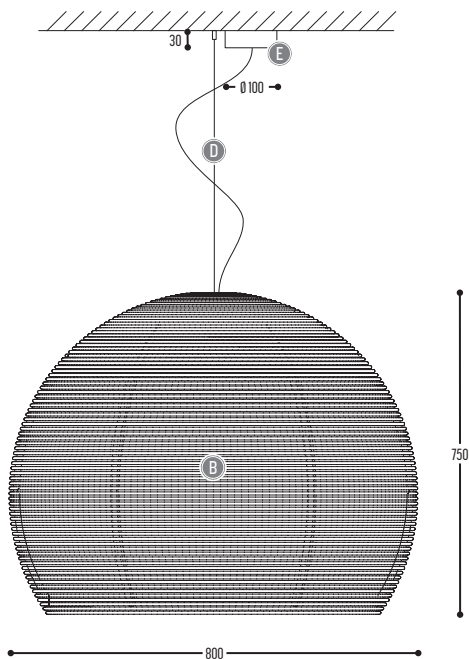


1010-4-BB(B)-001-DD-EE



SANGHA 120

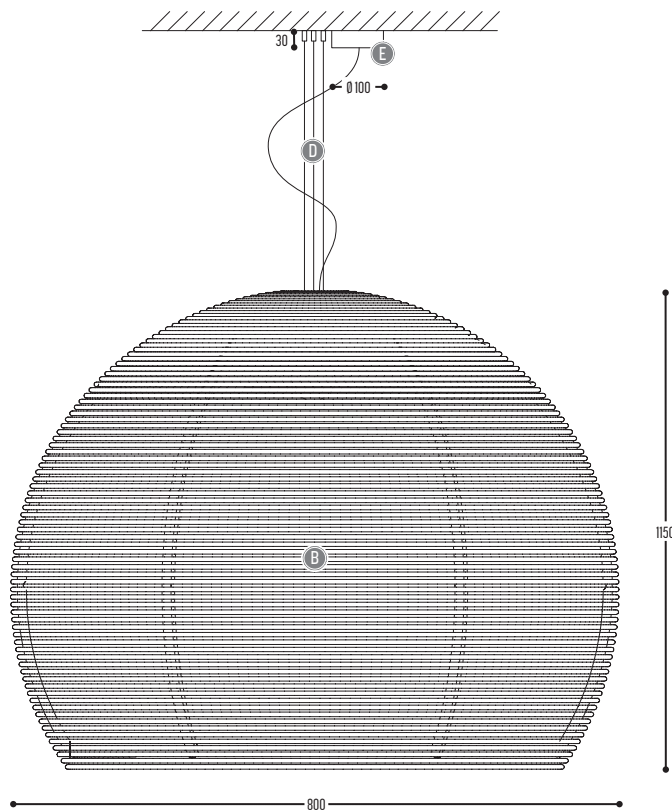

1010-5-BB(B)-001-DD-EE



BB(B)						CCC				DD		EE		
COLORS						TYPE				SUSP. CABLE		SUSP. KIT		
02		Black	104		Soft Green	001	E27		QA60 (MAX 42 W)	01	1,5 m	02		Black
03		White	105		Cream				TC-TSE (MAX 11 W)	02	2,5 m	03		White
37		Natural	106		Blue				LED (MAX 12 W)					
100		Chocolat	107		Yellow									
101		Soft Pink	108		Green									
102		Soft Yellow	109		Red									
103		Soft Blue												



SKYLINE

design lieven musschoot & mathias hernebel for daek



reddot design award
winner 2013




SKYLINE ONE



920-BB-EFFGGH-II(I)-K

Alu

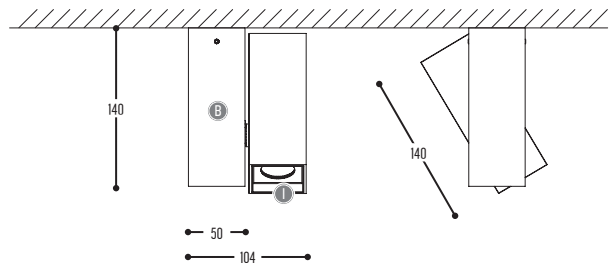


SKYLINE TWO



921-BB-EFFGGH-II(I)-K

Alu

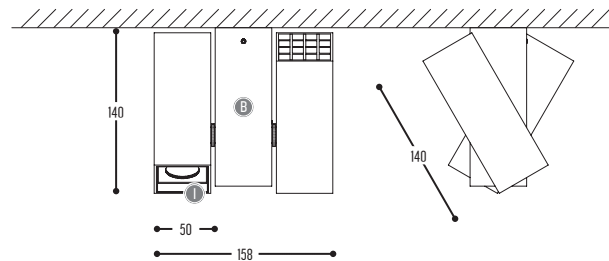

BB			EFF			GG		H	II(I)				K				
COLOR OUTSIDE			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		COLOR INSIDE				DRIVER			
02		Black	806	>80 CRI • 600 Lm / 7,2 W		30	30°	2	2700K	02		Black	105		Cream	0	incl./non dim
03		White	906	>90 CRI • 600 Lm / 7,2 W		40	40°	3	3000K	03		White	106		Blue	4	Phase cut
						54	54°			100		Chocolat	107		Yellow		
										101		Soft Pink	108		Green		
										102		Soft Yellow	109		Red		
										103		Soft Blue	112		Gold paint		
										104		Soft Green					



1080-BB(B)-001-DD-E

Metal

1 LAMPS

3 kg


CE

230 V

0.5m

960°

IP20

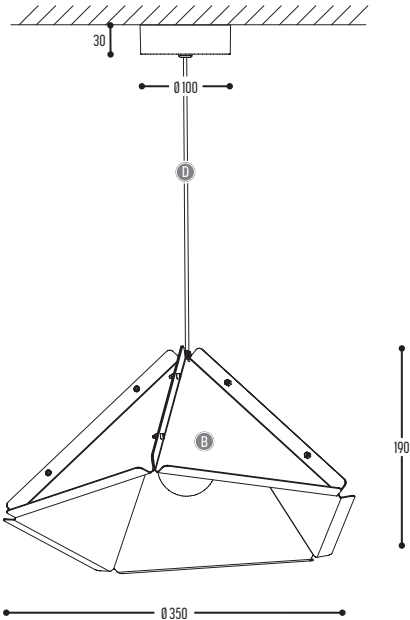

BB(B)				CCC			DD		E	
COLORS				TYPE			SUSP. CABLE		SUSP. KIT	
02		Black	105				01	1,5 m	B	Black
03		White	106				02	2,5 m	W	White
100		Chocolat	107	001	E27	QA60 (MAX 42 W)				
101		Soft Pink	108			TC-TSE (MAX 11 W)				
102		Soft Yellow	109			LED (MAX 12 W)				
103		Soft Blue	110							
104		Soft Green	112							
124		Kaki								



Architect Mark Van Acker
photo © Yannick Milpos

 www.pinterest.com/pindark/spacewalker-dark

SPACEWALKER

design constantin wortmann for daab





USA 2008



reddot design award
best of the best 2009



580-03-CCC-DD

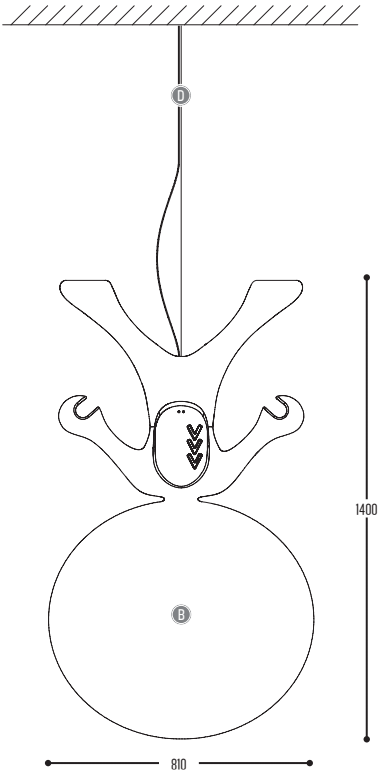

BB		CCC				DD	
BODY		TYPE				SUSP. CABLE	
03	White (translucent)	321	G5		T16 (21 W) Non Dim	02	2,5 m
		322			T16 (21 W) Dim 1-10 V	03	5 m
		323			T16 (21 W) ONE 4 ALL		
		339			T16 (39 W) Non Dim		
		340			T16 (39 W) Dim 1-10 V		
		341			T16 (39 W) ONE 4 ALL		
		510	LED		Warm white - stand alone		
		500			RGB - stand alone (dmx, dali on request)		



SPACEWALKER FLOOR

581-03-CCC-00

PE

Metal

3 LAMPS

140 kg


CE

230 V

0.2m

850°

IP40

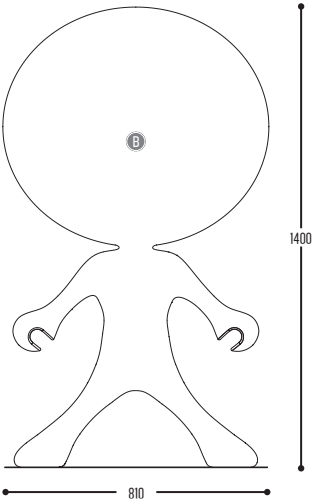

BB			CCC			
BODY			TYPE			
03		White (translucent)	321	G5		T16 [21 W] Non Dim
			339			T16 [39 W] Non Dim
			510	LED	Warm white - stand alone	
			500		RGB - stand alone (dmx, dali on request)	
			IP65 LED version available on request			



 www.pinterest.com/pindark/spaze-dark

BB			C(C)			DD	
COLORS			TYPE 1			SUSP. CABLE	
02		Black	3	LED	>80 CRI • 7640 Lm / 49,6 W / 3000K	01	1,5 m
03		White				02	2,5 m
			13	LED	>80 CRI • 4100 Lm / 24,8 W / 3000K		

SPAZE

design anthony boelaert for daek




reddot design award
winner 2017

SPAZE 1 S



1286-BB-C(C)-DD-K-J-1-I
1286-BB-C(C)-DD-K-J-2GGH-I


PC | Alu

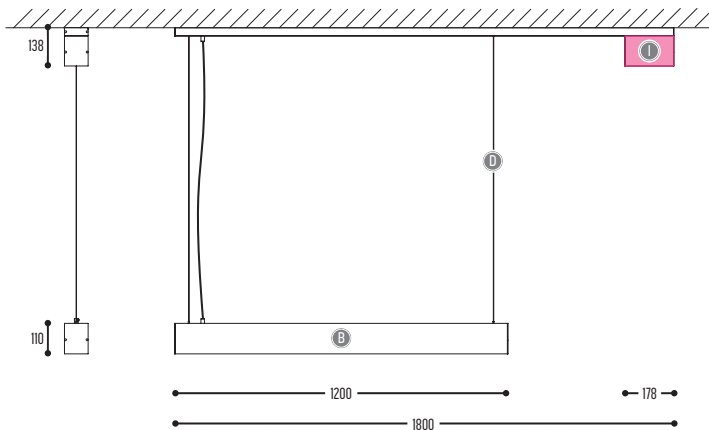


	K		J		M							I			
	DRIVER		DIFFUSER		TYPE 2							COLORS			
	0	incl./non dim	0	opal	 230 V	1	GU10		QPAR51 (MAX 50 W)				B		Black
	2	Dim 1-10 V	1	prismatic									W		White
	3	Dali											G		Gold point
											G		Gold point		
											C		Copper point		



SPACE 3 S

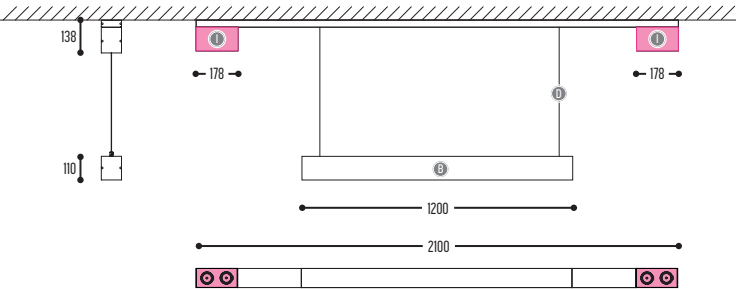


1296-BB-C(C)-DD-K-J-1-I
1296-BB-C(C)-DD-K-J-2GGH-I




BB			C(C)				DD	
COLORS			TYPE 1				SUSP. CABLE	
02		Black	3	LED	Space 3 S Space 5 S Space 7 S	>80 CRI • 7640 Lm / 49,6 W / 3000 K >80 CRI • 2x 7640 Lm / 49,6 W / 3000 K >80 CRI • 15280 Lm / 99,2 W / 3000 K	01	1,5 m
03		White					02	2,5 m
			13	LED	Space 3 S Space 5 S Space 7 S	>80 CRI • 4100 Lm / 24,8 W / 3000 K >80 CRI • 2x 4100 Lm / 24,8 W / 3000 K >80 CRI • 8200 Lm / 49,6 W / 3000 K		

1297-BB-C(C)-DD-K-J-1-I
1297-BB-C(C)-DD-K-J-2GGH-I

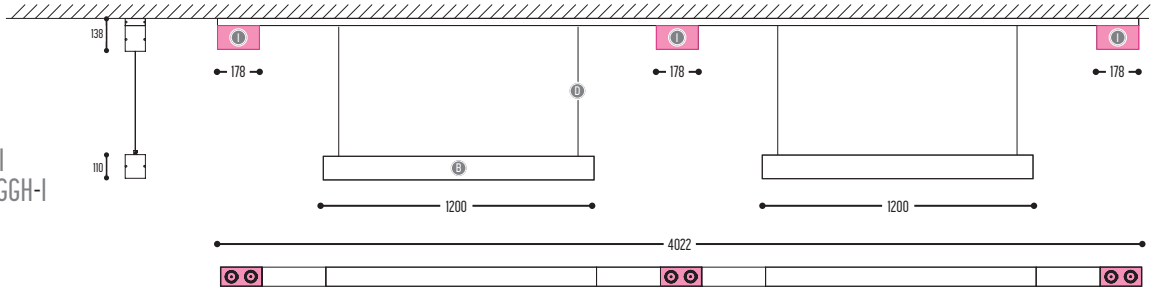

1298-BB-C(C)-DD-K-J-1-I
1298-BB-C(C)-DD-K-J-2GGH-I

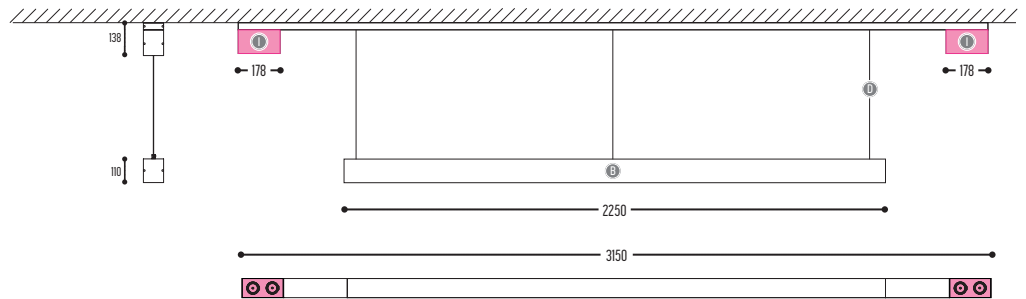315



 www.pinterest.com/pindark/spaze-dark

BB			C(C)		
COLORS			TYPE 1		
02		Black	3	LED	>80 CRI • 7640 Lm / 49,6 W / 3000 K
03		White			
			13	LED	>80 CRI • 4100 Lm / 24,8 W / 3000 K

SPACE 1



1285-BB-C(C)-K-J-1-I
1285-BB-C(C)-K-J-2GGH-I

PC

Alu

9 LAMPS

9 kg

CE

230 V

0.5m


LED 0.3m

96°

IP20

House icon

Up arrow icon

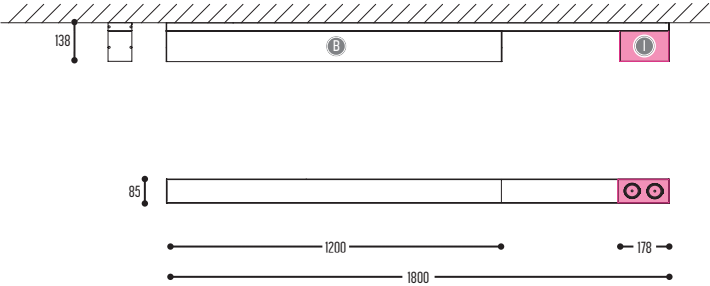


	K		J		M							I			
	DRIVER		DIFFUSER		TYPE 2							COLORS			
	0	incl./non dim	0	opal		1	GU10		QPAR51 (MAX 50 W)			B		Black	
	2	Dim 1-10 V	1	prismatic								W		White	
	3	Dali										G		Gold paint	
					E				GG		H		C		Copper paint
CRI • LUMENOUTPUT					REFLECTOR		COLOR TEMP.								
LED					2	>85 CRI • 2x 1000 Lm / 350 mA / 9 W		22				22°	2	2700 K	
								34				34°	3	3000 K	
	54	54°													



SPACE 3


1293-BB-C[C]-K-J-1-I
1293-BB-C[C]-K-J-2GGH-I

PC | Alu

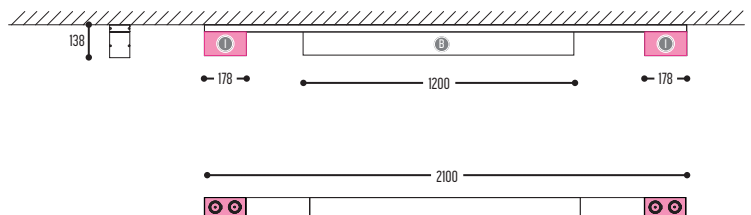

BB		C[C]				K	
COLORS		TYPE 1				DRIVER	
02	Black	3	LED	Space 3 Space 5 Space 7	>80 CRI • 7640 Lm / 49,6 W / 3000 K >80 CRI • 2x 7640 Lm / 49,6 W / 3000 K >80 CRI • 15280 Lm / 99,2 W / 3000 K	0	incl./non dim
03	White					2	Dim 1-10 V
		13	LED	Space 3 Space 5 Space 7	>80 CRI • 4100 Lm / 24,8 W / 3000 K >80 CRI • 2x 4100 Lm / 24,8 W / 3000 K >80 CRI • 8200 Lm / 49,6 W / 3000 K	3	Dali

SPACE 5

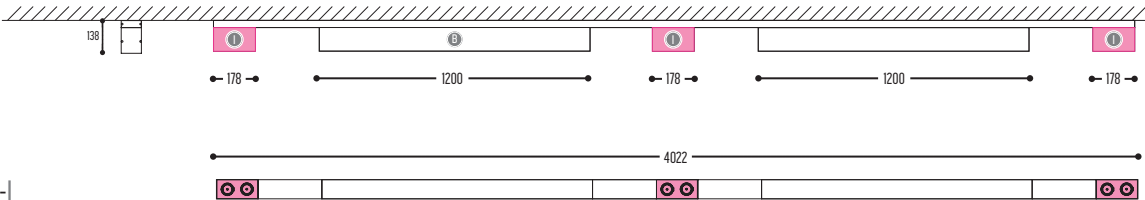


1294-BB-C(C)-K-J-1-I
1294-BB-C(C)-K-J-2GGH-I

PC | Alu



SPACE 7

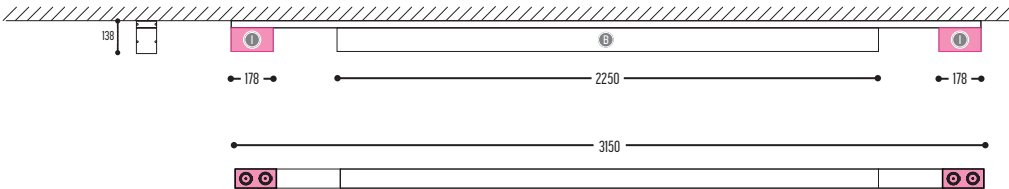


1295-BB-C(C)-K-J-1-I
1295-BB-C(C)-K-J-2GGH-I

PC | Alu




J			M						I			
DIFFUSER			TYPE 2						COLORS			
0	opal	 230 V	1	GU10		QPAR51 (MAX 50 W)			B		Black	
1	prismatic								W		White	
								G		Gold point		
		E				GG		H		C		Copper point
		CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.				
LED		2	>85 CRI • 2x 1000 Lm / 350 mA / 9 W				22	22°	2	2700 K		
							34	34°	3	3000 K		
							54	54°				

SPAZE PROFILE
1500-BB


	dimensions profile 85 x 30 mm max. 5,95 m		
	BB		
	COLORS		
	02		Black
	03		White

SPAZE ENDPLATE small
1503-BB

	BB		
	COLORS		
	02		Black
	03		White




METROLINE PROFILE
1400-BB

	dimensions profile 85 x 110 mm max. 5,95 m		
	BB		
	COLORS		
	02		Black
	03		White


SPAZE ENDPLATE
1504-BB

	BB		
	COLORS		
	02		Black
	03		White


LED MODULE high lumen
1406-BB-C-D

	BB			C		D	
	LENGTH			COLOR TEMP.		DRIVER	
	01	280 mm	>80CRI • 1910 Lm / 12,4 W	3	3000K	0	incl./non dim
	02	560 mm	>80CRI • 3820 Lm / 24,8 W	4	4000K	1	excl.
	03	1120 mm	>80CRI • 7640 Lm / 49,6 W			2	Dim 1-10 V
						3	Dali


LED MODULE low lumen
1406-BB-IC-D

	BB			C		D	
	LENGTH			COLOR TEMP.		DRIVER	
	01	280 mm	>80CRI • 1025 Lm / 6,2 W	3	3000K	0	incl./non dim
	02	560 mm	>80CRI • 2050 Lm / 12,4 W	4	4000K	1	excl.
	03	1120 mm	>80CRI • 4100 Lm / 24,8 W			2	Dim 1-10 V
						3	Dali

COVER PROFILE
1401-BB

	max. 5,95 m		
	BB		
	COLORS		
	02		Black
	03		White


DIFFUSER
1402-B

	max. 5,95 m		
	B		
	TYPE		
	0	Opal	
	1	Prismatic*	

* prismatic diffuser:
UGR < 19
According to the new
European standard UGR < 19
as the maximum permissible
value for offices.

HOW TO ORDER

HOW TO ORDER A BLACK SPAZE SYSTEM PROFILE OF 7000 mm :

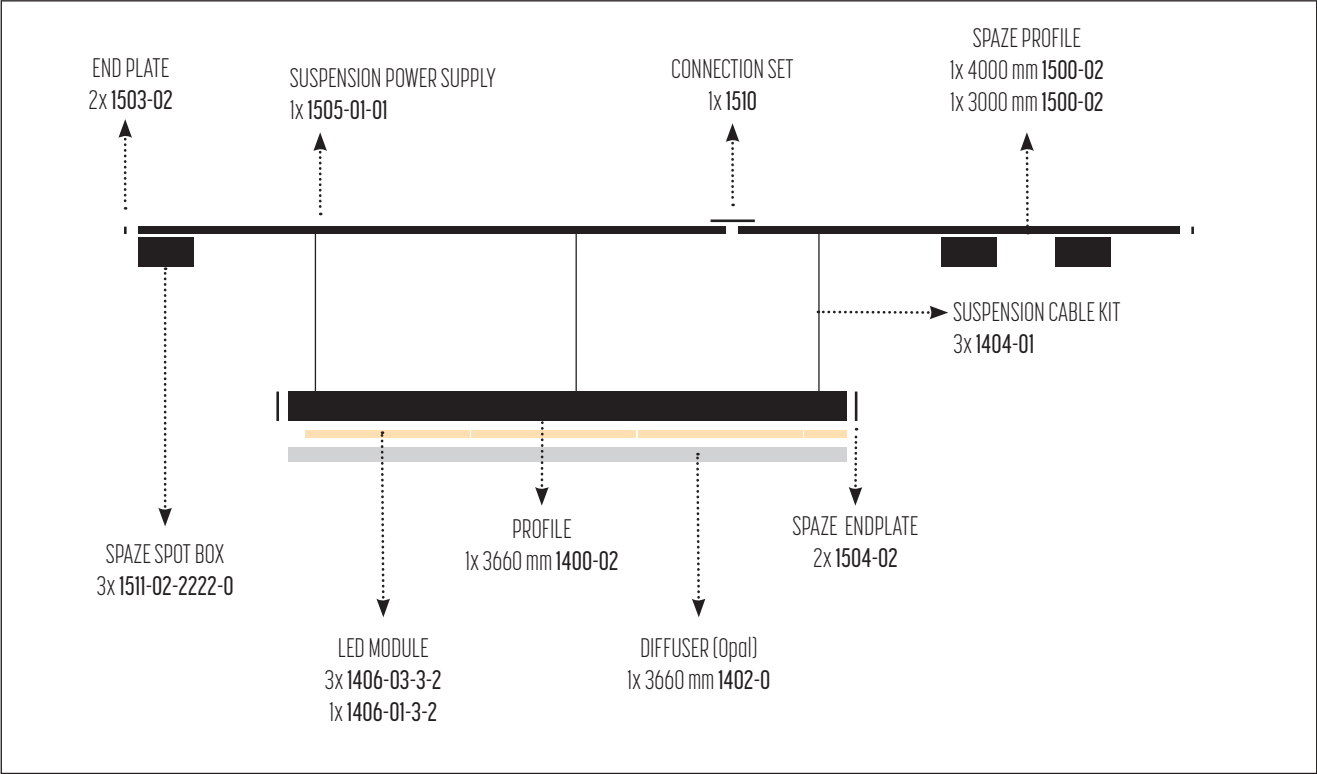

SUSPENSION CABLE KIT
1404-BB

	BB	
	SUSPENSION CABLE	
	01	1,5 m
	02	2,5 m

max. 1,5 m distance between 2 suspension cables

SUSPENSION POWER SUPPLY KIT
1505-BB-DD

	BB		DD	
	COLORS		POWER CABLE	
	01	Black	01	1,5 m
	02	White	02	2,5 m
			11	1,5 m
			12	2,5 m

SPAZE SPOT BOX
1511-BB-2GGH-K

	BB		E			GG		H		K	
	COLOR		CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP		DRIVER	
	02	Black	LED	2	>85 CRI • 2x 1000 Lm / 350 mA / 9 W	22	22°	2	2700K	0	incl./non dim
	03	White				34	34°	3	3000K	1	excl.
						54	54°			2	Dim 1-10 V
										3	Dali



SPACE SYSTEM

design dark studio for dark




ENDLESS POSSIBILITIES

CALL THE DARK COWBOYS



530-BB-EFF3-K-DD

PC | Alu

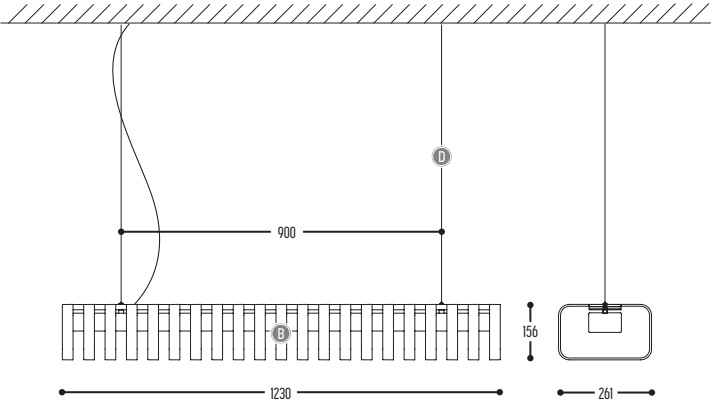

BB			EFF			H		K		DD	
COLOR BODY			CRI • LUMENOUTPUT			COLOR TEMP.		DRIVER		SUSP. CABLE	
02		Black	LED	866	>80 CRI • 1x 7640 Lm / 49,6 W	3	3000 K	0	incl./non dim	01	1,5 m
03		White		844	>80 CRI • 1x 4100 Lm / 24,8 W			2	Dim 1-10 V	02	2,5 m
									3	Dali	





reddot design award
winner 2009



DESIGNPREIS
2010

NOMINIERT

690-BB-001-DD

ABS

Metal

1 LAMPS


4 kg

CE

0.5m

960°

IP40

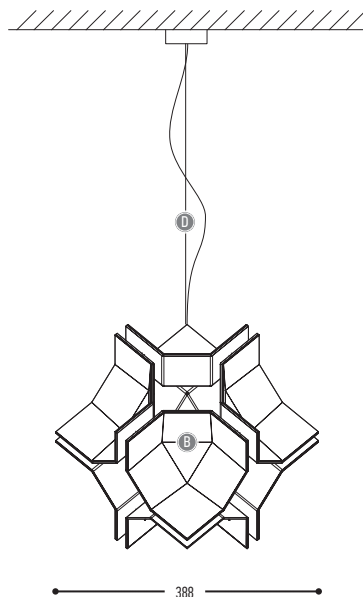

BB			CCC				DD	
COLORS			TYPE				SUSP. CABLE	
02		Black	001	E27		TCG-SE / Globe (MAX 15 W)	01	1,5 m
03		White				LED / Globe (MAX 11 W)	02	2,5 m



TIKI BOX1

2029-BB-906GGH-I-K

Alu

1 LAMPS

0,3 kg

CE


0,3m

960°

365°

80°

IP20

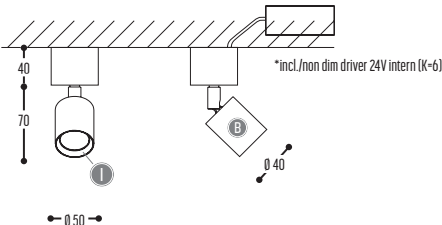

TIKI BOX2

2030-BB-906GGH-I-K

Alu

2 LAMPS

0,9 kg

CE


0,3m

960°

365°

80°

IP20

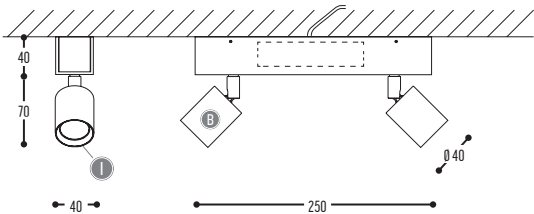

TIKI BOX3

2031-BB-906GGH-I-K

Alu

3 LAMPS

1,3 kg

CE


0,3m

960°

365°

80°

IP20

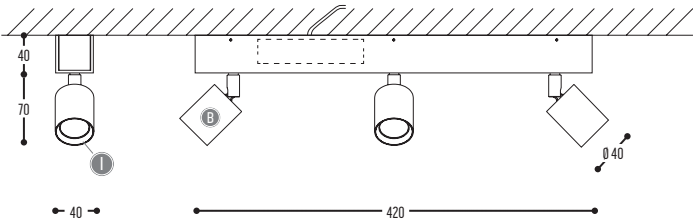

BB			EFF			GG		H		I			K				
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR			DRIVER				
02		Black	LED	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	22	22°	2	2700 K	W		White	0	incl./non dim			
03		White				34	34°	3	3000 K	B		Black	1	excl.			
						54	54°	4	4000 K	G		Gold	2	Dim 1-10 V			
																3	Dali
																4	Phase cut
																24V CONVERTER	
																6	incl./non dim
																8	Dali



TIKI SET1/50
2035-BB-906GGH-I-K

Alu

1 LAMPS

0.3 kg

CE


230 V

365°

960°

IP40

NO UV/IR



TIKI SET1/90
2036-BB-906GGH-I-K

Alu

1 LAMPS

0.3 kg

CE


230 V

365°

960°

IP40

NO UV/IR



TIKI SET2
2038-BB-906GGH-I-K

Alu

1 LAMPS

0.3 kg

CE


230 V

365°

960°

IP40

NO UV/IR

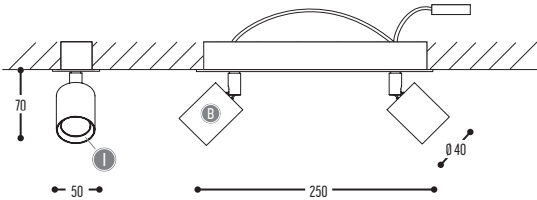

TIKI SET3
2041-BB-906GGH-I-K

Alu

1 LAMPS

0.3 kg

CE


230 V

365°

960°

IP40

NO UV/IR

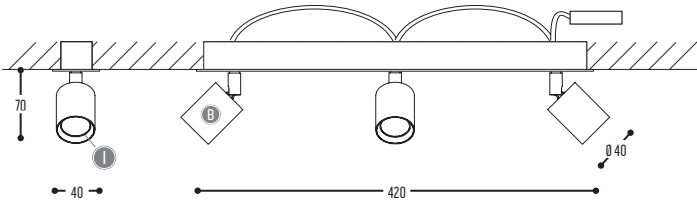


BB			EFF			GG		H		I		K					
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR		DRIVER extern					
02		Black	LED	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	22	22°	2	2700 K	W		White	0	incl./non dim			
03		White				34	34°	3	3000 K	B		Black	1	excl.			
						54	54°	4	4000 K	G		Gold	2	Dim 1-10 V			
																3	Dali
																4	Phase cut
																24V CONVERTER extern	
																6	
						8		Dali									



TIKI TRACK MAGNETIC 24V

2044-BB-906GGH-I-K

Alu

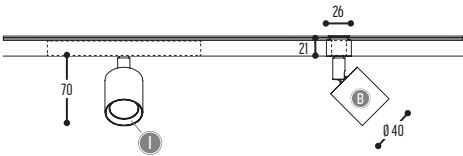


TRACK RAIL: to be ordered separately
Compatible with
STUCCHI standard low voltage track

TIKI TRACK LOW VOLTAGE

2045-BB-906GGH-I-6

Alu

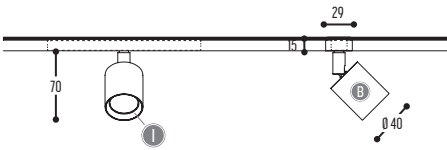


TRACK RAIL: to be ordered separately
Compatible with
EUTRAC low voltage led-trac

BB			EFF			GG		H		I			K	
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR			24V CONVERTER intern	
02		Black	LED	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	22	22°	2	2700 K	W		White	6	incl./non dim
03		White				34	34°	3	3000 K	B		Black	7	Dim 1-10 V
						54	54°	4	4000 K	G		Gold	8	Dali
						54	54°	4	4000 K	G		Gold	8	Dali



TUKI 60S

1349-BB-907GGH-DD-I-K

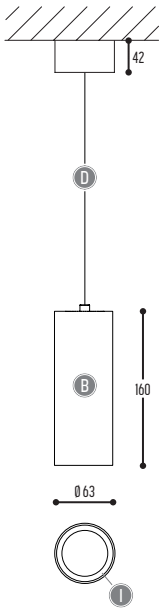

BB			EFF			GG		H		DD		I		K		
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		SUSP. CABLE		INSIDE COLOR		DRIVER		
02		Black	LED	907	>90 CRI • lx 895 Lm / 350 mA / 15 W	11	11°	2	2700 K	01	1,5 m	W		White	0	Incl./non dim
03		White				20	20°	3	3000 K	02	2,5 m	B		Black	4	Phase cut
						34	34°	4	4000 K			G		Gold		



TUKI 40
1340-BB-906GGH-I-K

Alu


1 LAMPS

0,3 kg

960°

IP40

NO UV/IR

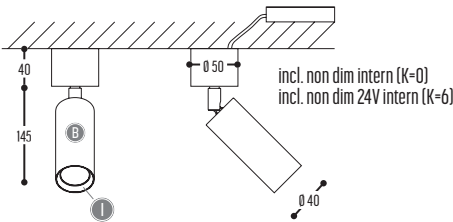

TUKI 40 BOX2
2091-BB-906GGH-I-K

Alu


1 LAMPS

0,3 kg

960°

IP40

NO UV/IR

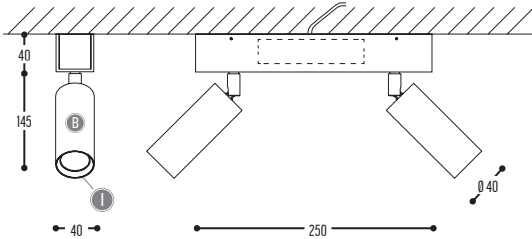

TUKI 40 BOX3
2092-BB-906GGH-I-K

Alu


1 LAMPS

0,3 kg

960°

IP40

NO UV/IR

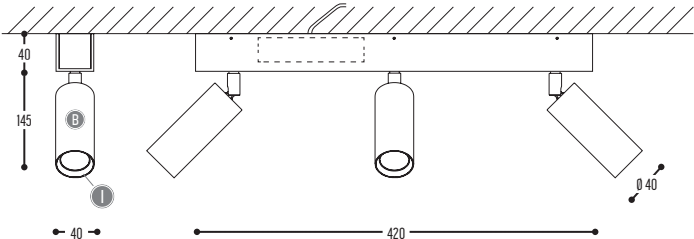

BB			EFF			GG		H		I			K	
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR			DRIVER	
02		Black	LED	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	22	22°	2	2700 K	W		White	0	incl./non dim
03		White				34	34°	3	3000 K	B		Black	1	excl.
						54	54°	4	4000 K	G		Gold	2	Dim 1-10 V
												3	Dali	
												4	Phase cut	
												24V CONVERTER		
												6	incl./non dim	
												8	Dali	

TUKI 40 SET1/50

1353-BB-906GGH-I-K

Alu

1 LAMPS

10,3 kg

CE


230 V

365°

960°

IP40

NO UV/IR



TUKI 40 SET1/90

1343-BB-906GGH-I-K

Alu

1 LAMPS

10,3 kg

CE


230 V

365°

960°

IP40

NO UV/IR



TUKI 40 SET2

2081-BB-906GGH-I-K

Alu

1 LAMPS

10,3 kg

CE


230 V

365°

960°

IP40

NO UV/IR

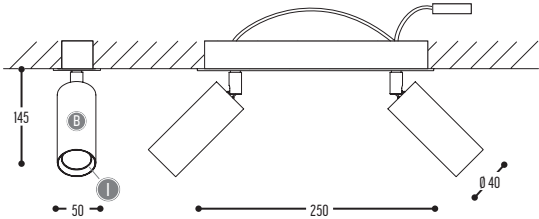

TUKI 40 SET3

2082-BB-906GGH-I-K

Alu

1 LAMPS

10,3 kg

CE


230 V

365°

960°

IP40

NO UV/IR

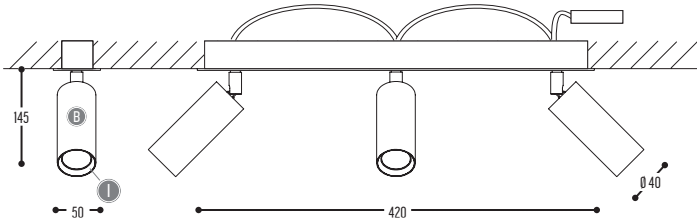

BB			EFF			GG		H		I			K				
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR			DRIVER extern				
02		Black	LED	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	22	22°	2	2700 K	W		White	0	incl./non dim			
03		White				34	34°	3	3000 K	B		Black	1	excl.			
						54	54°	4	4000 K	G		Gold	2	Dim 1-10 V			
												3	Dali				
												4	Phase cut				
												24V CONVERTER extern					
												6	incl./non dim				
												8	Dali				



TUKI 60

1347-BB-907GGH-I-K

Alu

1 LAMPS

0,6 kg


CE

230 V

0,3 m

960°

IP20

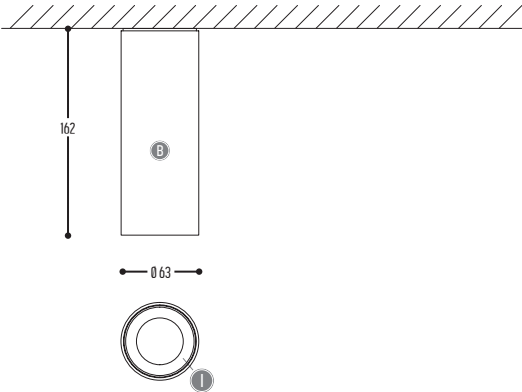

TUKI 60 MOVE

1345-BB-907GGH-I-K

Alu

1 LAMPS

0,4 kg

CE

230 V


0,3 m

960°

365°


80°

IP20

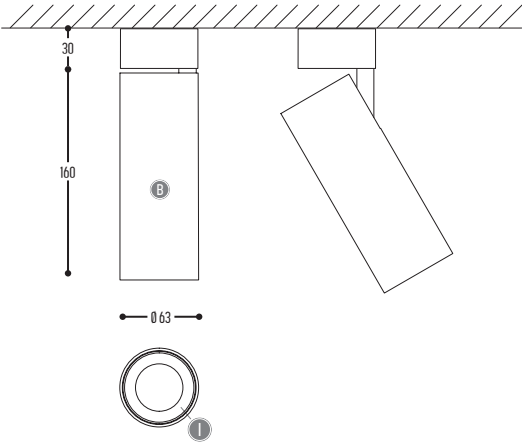

BB			EFF			GG	H	I		K				
COLORS			CRI • LUMENOUTPUT			REFLECTOR	COLOR TEMP.	INSIDE COLOR		DRIVER				
02		Black	LED	907	>90 CRI • 1x 895 Lm / 350 mA / 15 W	11	11°	2	2700 K	W		White	0	incl./non dim
03		White				20	20°	3	3000 K	B		Black	4	Phase cut
						34	34°			G		Gold		

TUKI WALL



2020-BB-90600H-K

Alu

2 LAMPS

10,8 kg

CE

230 V

0,3m

960°

IP20

BB			EFF			H		K	
COLORS			CRI • LUMENOUTPUT			COLOR TEMP.		DRIVER	
02		Black	LED	906	>90 CRI • 2x600 Lm / 350 mA / 6,4 W	2	2700 K	0	incl./non dim
03		White				3	3000 K	1	excl.
112		Gold point				4	4000 K	2	Dim 1-10 V (extern)
								3	Dali (extern)
							4	Phase-cut (extern)	



TUKI 40 TRACK

1341-BB-906GGH-I-0

Alu

LAMPS

10,4 kg

CE

230 V


0,3m

80°

365°

960°

IP20

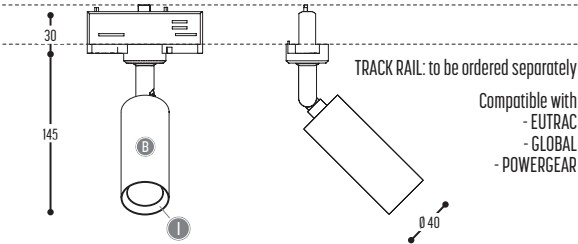

TUKI 40 IN-TRACK

1352-BB-906GGH-I-0

Alu

LAMPS

10,4 kg

CE

230 V


0,3m

80°

365°

960°

IP20

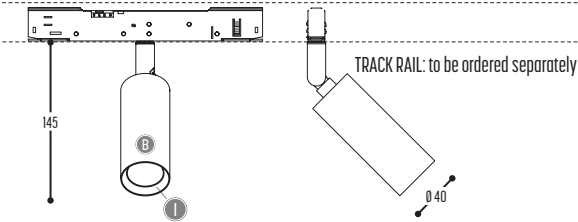

BB			EFF			GG		H		I			K	
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR			DRIVER	
02		Black	LED	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	22	22°	2	2700 K	W		White	0	incl./non dim
03		White				34	34°	3	3000 K	B		Black		
						54	54°	4	4000 K	G		Gold		

TUKI 40 TRACK MAGNETIC

1355-BB-906GGH-I-K

Alu

1 LAMPS

0,4 kg

CE

230 V


0,3 m

80°

365°

960°

IP20

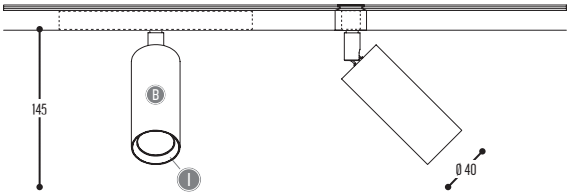

TRACK RAIL: to be ordered separately
Compatible with
STUCCHI standard low voltage track

TUKI 40 TRACK LOW VOLTAGE

1354-BB-906GGH-I-6

Alu

1 LAMPS

0,4 kg

CE

230 V


0,3 m

80°

365°

960°


IP20

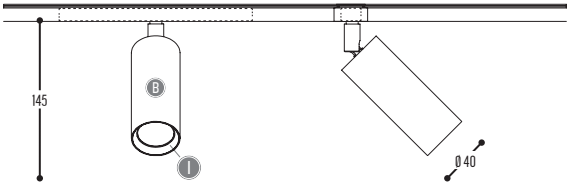

TRACK RAIL: to be ordered separately
compatible with
EUTRAC low voltage led-trac

BB			EFF			GG		H		I			K	
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR			24V CONVERTER	
02		Black	LED	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	22	22°	2	2700 K	W		White	6	incl./non dim
03		White				34	34°	3	3000 K	B		Black	7	Dim. 1-10V
						54	54°	4	4000 K	G		Gold	8	Dali

TUKI 60 TRACK

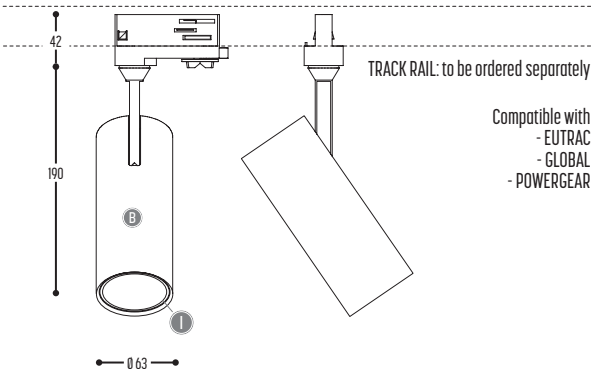

1346-BB-065-I
1346-BB-907GGH-I-K

Alu

1 LAMPS (0,4 kg) CE 230 V 0,3m 90° 365° 80° IP20

BB			CCC						I					
COLORS			TYPE						INSIDE COLOR					
02		Black		065	GU10		QPAR51 (MAX 50 W)	W		White				
03		White						B		Black				
								G		Gold				
			EFF			GG		H		I		K		
			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR		DRIVER		
			LED	907	>90 CRI • 895 Lm / 350 mA / 15 W	11	11°	2	2700 K	W		White	0	incl./non dim
						20	20°	3	3000 K	B		Black	4	Phase cut
						34	34°			G		Gold		

TUKI 75 TRACK



1350-BB-916GGH-I-4
1350-BB-EFFGGH-I-0

Alu

1 LAMPS

10,0 kg


CE

230 V

0,3 m

960°

IP20

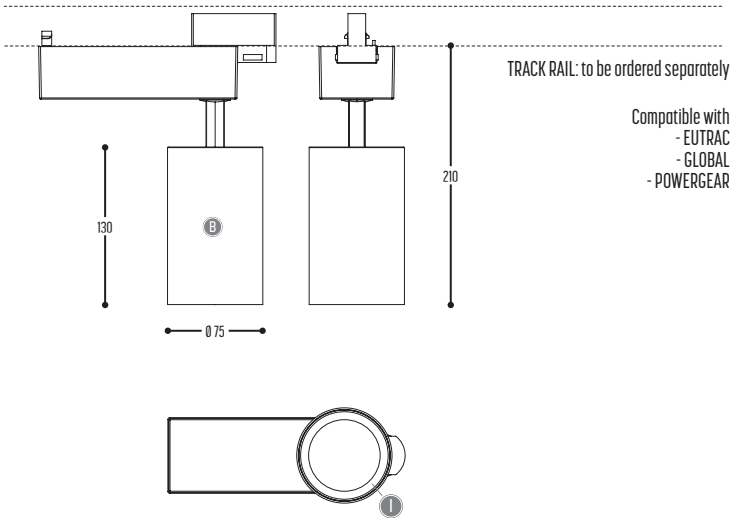

BB			EFF				GG		H		I			K	
COLORS			CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		INSIDE COLOR			DRIVER	
02		Black	LED	916	>90 CRI • 1600 Lm / 350 mA / 18 W		24	24°	2	2700 K	B		Black	0	incl./non dim
03		White		921	>90 CRI • 2100 Lm / 500 mA / 20 W		34	34°	3	3000 K	G		Gold	4	Phase cut
				928	>90 CRI • 2850 Lm / 700 mA / 28 W		40	40°							
				935	>90 CRI • 3500 Lm / 900 mA / 36 W										





TWERKIT

design skwon for dark

TWERKIT S



1093-BB(B)-001-DD-EE

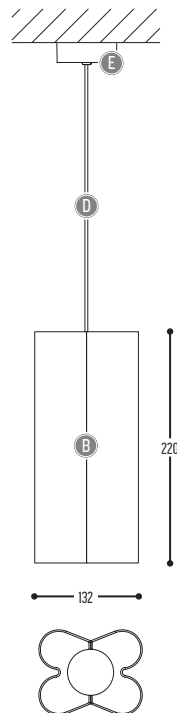

interior
innovation
award
2015

Selection

GOOD
DESIGN
USA 2015

BB(B)						CCC				DD		EE		
COLORS						TYPE				SUSP. CABLE		SUSP. KIT		
02		Black	104		Soft Green	001	E27		TCA-SE (MAX 12 W)	01	1,5 m	02		Black
03		White	105		Cream				02	2,5 m	03		White	
68		Copper point	106		Blue				LED (MAX 12 W)					
100		Chocolat	107		Yellow									
101		Soft Pink	108		Green									
102		Soft Yellow	109		Red									
103		Soft Blue	112		Gold point									

TWERKIT 2 JR.



1092-BB[B]-071-00
1092-BB[B]-80500H-00-K

AluSteel

1 LAMPS


0,4 kg

CE

0.3m

960°

IP20


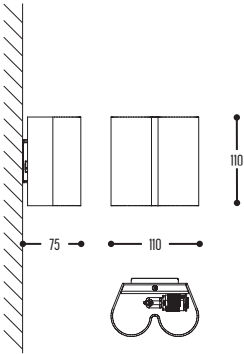


BB(B)			CCC											
COLORS			TYPE											
02		Black	071	G9		TC-TSE (MAX 9 W)								
03		White												
100		Chocolat				LED QT14 (MAX 9 W)								
101		Soft Pink												
102		Soft Yellow												
103		Soft Blue	EFF				GG		H		K			
104		Soft Green	CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		DRIVER			
105		Cream	805	LED	>85 CRI • 2x 300 Lm / 350 mA / 3 W				00	N.A.	2	2700 K	0	incl./non dim
106		Blue									3	3000 K	1	excl.
107		Yellow									4	4000 K		
108		Green												
109		Red												
112		Gold point												

TWERKIT 2





1090-BB(B)-071-00-I
1090-BB(B)-80500H-00-K-I

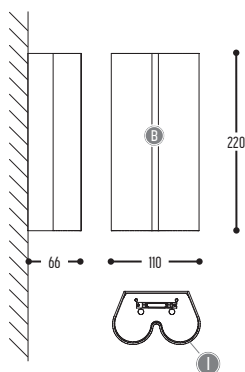

TWERKIT 3




1091-BB(B)-071-00-I
1091-BB(B)-80500H-00-K-I

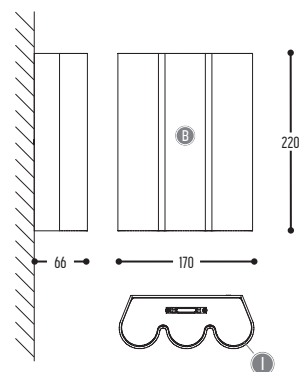

BB(B)			CCC								I					
COLORS			TYPE								INSIDE COLOR					
02		Black	071	G9		TC-TSE (MAX 9 W)			W		White					
03		White							B		Black					
100		Chocolat							G		Gold point					
101		Soft Pink														
102		Soft Yellow														
103		Soft Blue	EFF				GG	H	K	I						
104		Soft Green	CRI • LUMENOUTPUT				REFLECTOR	COLOR TEMP.	DRIVER	INSIDE COLOR						
105		Cream	805	LED	>85 CRI • 2x550 Lm / 700 mA / 6 W			00	N.A.	2	2700 K	0	incl./non dim	W		White
106		Blue								3	3000 K	1	excl.	B		Black
107		Yellow								4	4000 K	2	Dim 1-10 V	G		Gold point
108		Green											3	Dali		
109		Red														
112		Gold point														



TWIXI TRACK

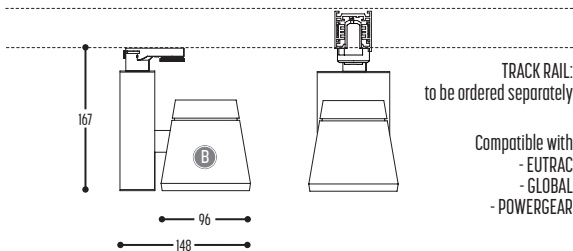

1836-BB-EFFGGH-K

Aluminium



BB		EFF				GG		H	K	
COLORS		CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.	DRIVER	
02	Black	LED	828	>80 CRI • 2850 Lm / 500 mA / 22 W		20	20°	2	2700 K	0 incl./non dim
03	White		928	>90 CRI • 2850 Lm / 500 mA / 22 W		40	40°	3	3000 K	3 Dali dim
						70	70°	4	4000 K	4 Phase cut





WALLSTER

design anthony boelaert for daek





WALLSTER ONE

1116-BB-065-00
1116-BB-81500H-K

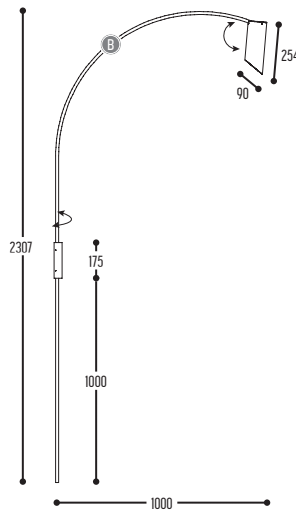

WALLSTER TWO

1115-BB-065-00
1115-BB-81500H-K

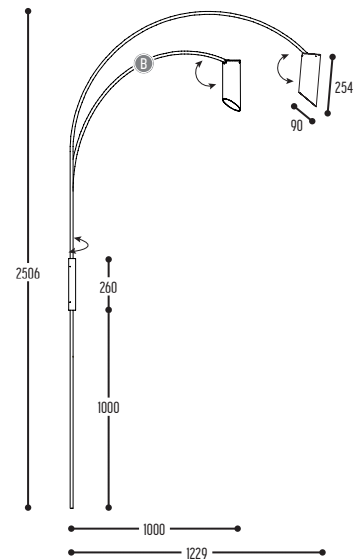

BB			CCC								
COLORS			TYPE								
02		Black	 230 V	065	GU10		QPAR51 (MAX 50 W)				
03		White									
							 LED (MAX 7,5 W)				
EFF						GG		H		K	
CRI • LUMENOUTPUT						REFLECTOR		COLOR TEMP.		DRIVER	
LED	815	>85 CRI • 1500 Lm / 500 mA / 13,6 W			00	N.A.	2	2700 K	0	incl./non dim	
							3	3000 K	2	Dim 1-10 V	
							4	4000 K	3	Dali	



WALLSTER
PLUS ONE

1118-BB-065-00-MMM
1118-BB-81500H-K-MMM-Q

Metal

Alu

1 LAMPS

2 kg


CE

0.5m

CC DRIVER

960°

IP20

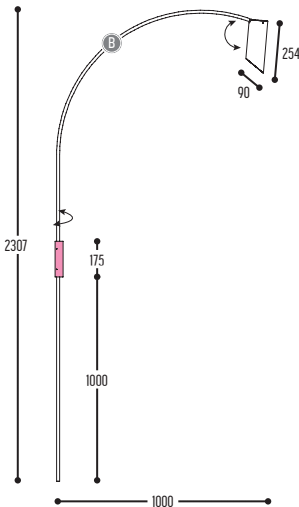

WALLSTER
PLUS TWO

1117-BB-065-00-MMM
1117-BB-81500H-K-MMM-Q

Metal

Alu

2 LAMPS

3 kg


CE

0.3m

CC DRIVER


960°

IP20

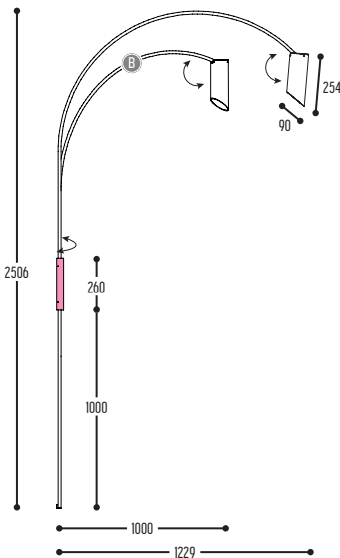

BB			CCC			MMM						
COLORS			TYPE1			TYPE2						
02		Black	 230 V	065	GU10		QPAR51 (MAX 50 W)	 230 V	071	G9		2x TC-TSE (MAX 9 W)
03		White					LED (MAX 7,5 W)					2x LED (MAX 7,5 W)
			EFF		H	K		MMM			Q	
			CRI • LUMENOUTPUT		COLOR TEMP.	DRIVER		TYPE2			DRIVER	
	815	>85 CRI • 1500 Lm / 500 mA / 13,6 W	2	2700 K	0	incl./non dim			803	>80 CRI • 2x 350 Lm / 350 mA / 6,4 W	0	incl./non dim
			3	3000 K	2	Dim 1-10 V	1				excl.	
			4	4000 K	3	Dali						
								MMM			Q	
								TYPE2			DRIVER	
	815	>85 CRI • 1500 Lm / 500 mA / 13,6 W	2	2700 K	0	incl./non dim			803	>80 CRI • 2x 350 Lm / 350 mA / 6,4 W	0	incl./non dim
			3	3000 K	2	Dim 1-10 V	1				excl.	
			4	4000 K	3	Dali						

WALLSTER JR.

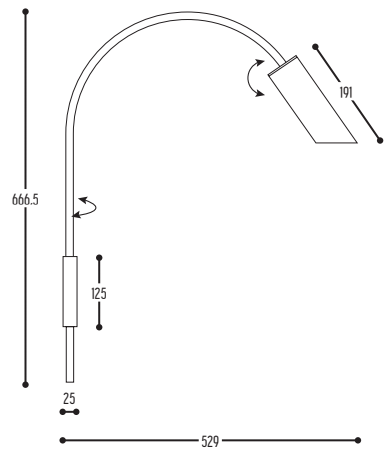


1120-BB-90600H-K

Metal | Alu



BB			EFF			GG		H		K			
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		DRIVER			
02		Black	LED	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	00	N.A.	2	2700 K	0	incl./non dim		
03		White						3	3000 K	1	excl.		
										4	4000 K	2	Dim 1-10 V (extern)
												3	Dali (extern)

WALLSTER JR. - B

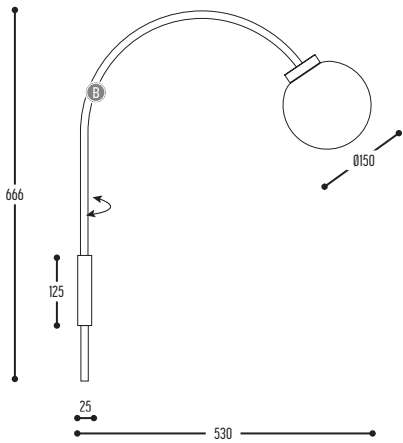

1121-BB-90600H-K

Glass Metal Alu



BB		EFF		GG	H		K	
COLORS		CRI • LUMENOUTPUT		REFLECTOR	COLOR TEMP.		DRIVER	
02	Black	LED	906 >90CRI • 600 Lm / 350 mA / 6,4 W	00 N.A.	2	2700 K	0	incl./non dim
03	White				3	3000 K	1	excl.
					4	4000 K	2	Dim 1-10 V (extern)
							3	Dali (extern)



YOKOZUNA

design fabien dumas for daek

770-BB-CCC-DD

PE

Metal

3 LAMPS

25 kg


CE

230 V

0.2m

850°

IP20

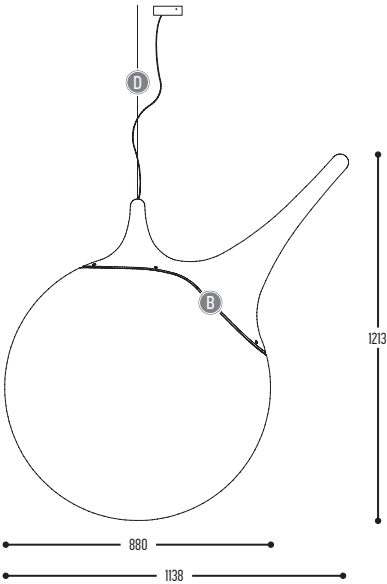

BB		CCC				DD	
BODY		TYPE				SUSP. CABLE	
03	White (translucent) / White	324	G5		T16 (24 W) Non Dim	02	2,5 m
04	White (translucent) / Red	325			T16 (24 W) Dim 1-10 V	03	5 m
		326			T16 (24 W) ONE 4 ALL		
		510	LED		Warm white - stand alone		
		500			RGB - stand alone (dmx, dali on request)		







ZNOW

design anthony boelaert for daek


ZNOW 22




1100-BB(B)-065-00
1100-BB(B)-EFF00H-00-K




ZNOW 27




1101-BB(B)-065-00
1101-BB(B)-EFF00H-00-K



ZNOW 32

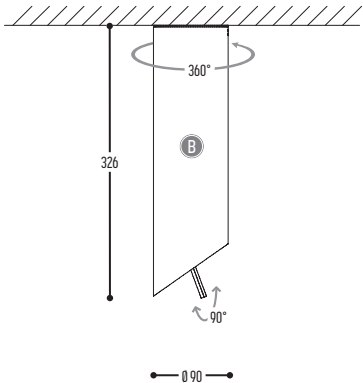


1102-BB(B)-065-00
1102-BB(B)-EFF00H-00-K




BB(B)			CCC										
COLORS			TYPE										
02		Black	 230 V	065	GU10		OPAR51 (MAX 50 W)						
03		White											
100		Chocolat					LED (MAX 7,5 W)						
101		Soft Pink											
102		Soft Yellow											
103		Soft Blue	EFF				GG		H		K		
104		Soft Green											
105		Cream	CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		DRIVER		
106		Blue											
107		Yellow	LED	815	>80 CRI • 1500 Lm / 500 mA / 13,6 W			00	N.A.	2	2700 K	0	incl./non dim
108		Green		913	>95 CRI • 1300 Lm / 700 mA / 15,6 W					3	3000 K	1	excl.
109		Red					4			4000 K	2	Dim 1-10 V	
												3	Dali




ZNOW JR 16




1105-BB(B)-065-00
1105-BB(B)-EFF00H-00-K




ZNOW JR 19




1106-BB(B)-065-00
1106-BB(B)-EFF00H-00-K



ZNOW JR 24

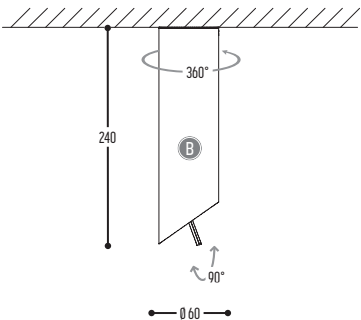

1107-BB(B)-065-00
1107-BB(B)-EFF00H-00-K






BB(B)			CCC										
COLORS			TYPE										
02		Black		065	GU10		QPAR51 (MAX 50 W)						
03		White											
100		Chocolat					LED (MAX 7,5 W)						
101		Soft Pink											
102		Soft Yellow											
103		Soft Blue											
104		Soft Green	EFF				GG		H		K		
105		Cream	CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		DRIVER EXTERN		
106		Blue											
107		Yellow	LED	806	>80 CRI • 600 Lm / 350 mA / 6,4 W			00	N.A.	2	2700 K	0	incl./non dim (extern)
108		Green		906	>95 CRI • 600 Lm / 350 mA / 6,4 W					3	3000 K	1	excl.
109		Red							4	4000 K			




E27 FILAMENT-LAMP

G45		45x73mm	180-7500-044527	4W, 2700K, 400lm, triac dimmable, clear
A60		60x105mm	180-7500-046027	4W, 2700K, 400lm, triac dimmable, clear
			180-7500-066027	6W, 2700K, 600lm, triac dimmable, clear
			180-7500-086027	8W, 2700K, 800lm, triac dimmable, clear
G80		80x125mm	180-7500-068027	6W, 2700K, 600lm, triac dimmable, clear
G95		95x135mm	180-7500-069527	6W, 2700K, 600lm, triac dimmable, clear
			180-7500-069527-0	6W, 2700K, 600lm, triac dimmable, opal
G125		125x175mm	180-7500-0612527	6W, 2700K, 540lm, triac dimmable, clear



CEILING BASE 3 POINT KIT

1897-BB-CC(C)		1x CEILING BASE	
			
		3x CLIFFHANGER	
			
BB		CC(C)	
COLOR CEILING BASE		COLOR CLIFFHANGER	
02		02	
03		03	
		110	



CEILING BASE 5 POINT KIT

1898-BB-CC(C)		1x CEILING BASE	
			
		5x CLIFFHANGER	
			
BB		CC(C)	
COLOR CEILING BASE		COLOR CLIFFHANGER	
02		02	
03		03	
		110	



CEILING BASE CLUB 3

1893-02 Black 1893-03 White	
	



CEILING 3P PROFILE single

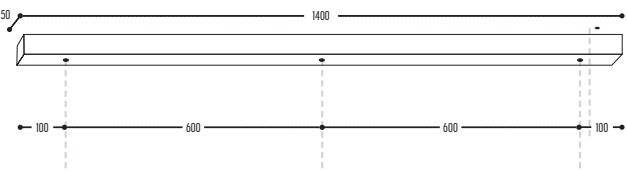1895-02 Black 1895-03 White	
	



CEILING BASE CLUB 5

1894-02 Black 1894-03 White	
	

CEILING 3P PROFILE double

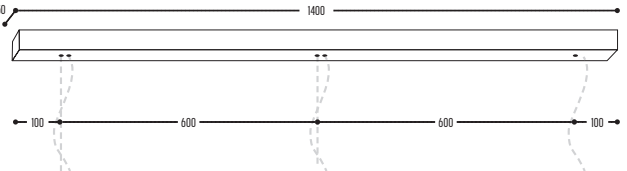1896-02 Black 1896-03 White	
	

ACCESSORIES

							
		CEILING BASE 3 POINT	CEILING BASE 5 POINT	CEILING BASE CLUB 3	CEILING BASE CLUB 5	CEILING 3P PROFILE single	CEILING 3P PROFILE double
12-25 S / S2		x	x	See 12-25 club 3	see 12-25 club 5		see 12-25 4P
AUSUM S		x	x				
BABY BUBBLE	E27	x	x				
BOKY		x	x				x
BRIDGE ONE		x	x				See Bridge One 3P
BRIDGE TWO		x	x				See Bridge Two 3P
CAPITANO		x	x				
CAPTAIN CORK / 45/MAX S		x	x	See Cpt. Cork club 3	See Cpt. Cork club 5	x	
COOLCAT S / S2	GU10	x	x	x	x	x	
	LED			x	x	x	See Coolfin 3P
COOLFIN S / S2 GU10	GU10	x	x	x	x	x	
	LED			x	x	x	
COOLFIN JR S / S2	LED			x	x	x	
CUP CAKE S		x	x	See Cup Cake club 3	See Cup Cake club 5	x	
FRANJE S		x	x			x	
IJ LAMP METAL		x	x			x	
LA CAGE / LA CAGE diva / LA CAGE grossa		x	x				x
LGTM		x	x				
PETROL S		x	x			x	
ROND-L IS		x	x	x	x		x
ROND-L 2S / ROND-L 3S		x	x				x
SANGHA 30		x	x			x	
SANGHA 40		x	x			x	
SANGHA 50		x	x				
SANGHA 80/120		x	x				
SOYUZ		x	x			x	
T&T		x	x				x
TUKI 60 S	NON.DIM	x	x	x	x	x	
TWERKIT S		x	x	x	x	x	

			SUSPENSION	CEILING	TRACK	PROFILE SYSTEM	WALL	FLOOR
	12-25		128	132	137		132	
A	AGUJA						140	
	ANGLE BEAM			142				
	APOLLO		146					
	ATSJI			148				
	ATSJOEM			150				
	AUSUM		152	155				
B	BABY BUBBLE		156					
	BALLZZZ		158					
	BANGSTER		168					
	BOKY		170					
	BRIDGE		172				175	
C	CAPITANO		176					
	CAPTAIN CORK		178					
	COOLCAT		182	184				
	COOLFIN		186	190	196			
	CUP CAKE		198	201				

			SUSPENSION	CEILING	TRACK	PROFILE SYSTEM	WALL	FLOOR
D	d-CONCRETE		204					
	d-COW		206					
	d-LEATHER		208					
	d-RABBIT		210					
	D2V2		212					213
	DING						215	
	DROPZ			216				
E	EDGAR		218	220				
F	FOREVER 27			222				
	FRANJE		224					225
G	GASTON						226	
H	HUITI		228	230				
	HOEK							232
I	ICE		234					
	IJ-LAMP		236				236	
K	KAVE00						240	

INDEX

			SUSPENSION	CEILING	TRACK	PROFILE SYSTEM	WALL	FLOOR
L	LA CAGE		242					
	L-HOP						246	
	LGTM		248					
M	METROBOX			250				
	METROFFICE			252				
	METROLINE		258	260		262		
	MR.BEAM		270					
N	NINZA		276	278				
	NO COPY		280					
	NO FRUIT		282					
O	OBLIVION		284					
	ORGUE		286				287	
P	PAINT-IT			288			289	
	PAROQ			290			290	
	PETROL		292				293	
	POC		294					
R	ROND-L		296	298			298	

			SUSPENSION	CEILING	TRACK	PROFILE SYSTEM	WALL	FLOOR
S	SANGHA		300					
	SKYLINE			304			304	
	SOYUZ		306					
	SPACEWALKER		308					310
	SPAZE		312	316		320		
	SPINE		324					
	T&T		326					
T	TIKI			328	331			
	TUKI		332	334	338		337	
	TWERKIT		342				344	
	TWIXI				346			
W	WALLSTER						348	
Y	YOKOZUNA		354					
Z	ZNOW			356				



DARK at night nv
Vliegplein 43
9991 Maldegem - Belgium
T +32 50 71 81 40
F +32 50 71 81 38
E info@dark.be
www.dark.be



www.facebook.com/wealllovetheDark



www.pinterest.com/pindark



www.instagram.com/dark.be