


Minion_S1



Ceiling Lights | 220-240 V | 1 x powerLED 7 W 440 mA | CRI 80
8740

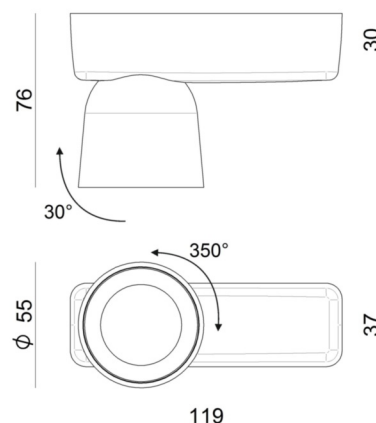

Technical data	
Type	Ceiling Lights
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	powerLED
Optics	Flood
Light emission direction	downward
Power	7 W
Source lumens	936 lm
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
AC / DC	AC
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Induction	No
Emergency mode	No
Motion sensor	No
Directional	Swivelling
total angle (horizontal plane)	30 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission

Finishing casing	
Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating

Finishing diffuser	
Material	PMMA
Processing	Satin finishing

Ceiling Lights | 220-240 V | 1 x powerLED 7 W 440 mA | CRI 80
8740

Single emission ceiling lights for indoor application. The warm white LED light source with a flood light distribution is composed of 1 topled LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 936 lm, with a 133.7 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of pmma with a satin finishing treatment. The ingress protection degree is IP40;

The total absorbed power is 7 W.

The device features protection class I and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Source lumens	936 lm
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80 °C
Standard Operating Ambient Temperature	25 °C
LED Life / Failure Ratio	
L80 B0 C0 72.6h	