




Wall Lights | 220-240 V | topLED 27 W 1000 mA | CRI 90
7487

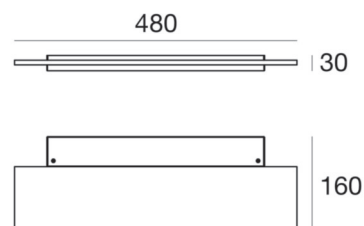

Technical data	
Designer	Linea Light
Type	Surface
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	General Lighting
Light emission direction	upward
Power	27 W
Source lumens	3360 lm
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
AC / DC	AC
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	1.880 Kg

Finishing diffuser	
Material	PMMA
Colour	white
Processing	Satin finishing

Finishing mounting frame	
Material	Iron
Colour	embossed white RAL 9003
Processing	Coating

Wall Lights | 220-240 V | topLED 27 W 1000 mA | CRI 90
7487

Single emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 96 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3360 lm, with a 124.4 lm/W nominal luminous efficacy.

The diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 1.880 kg.

The total absorbed power is 27 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	50 %
Source lumens	3360 lm
Delivered lumens	1713 lm
Consumption	27 W
Luminaire efficacy	63 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25
LED Life / Failure Ratio	
L80 B20 C0 80000h	

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 22
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Asymmetrical
C0/C180 optics	96°
C90/C270 optics	78°

